




# Netgear Arlo Charging Port Replacement

Replacement guide for the charging port under the battery cover in a Netgear Arlo.

Written By: Brian Johnson

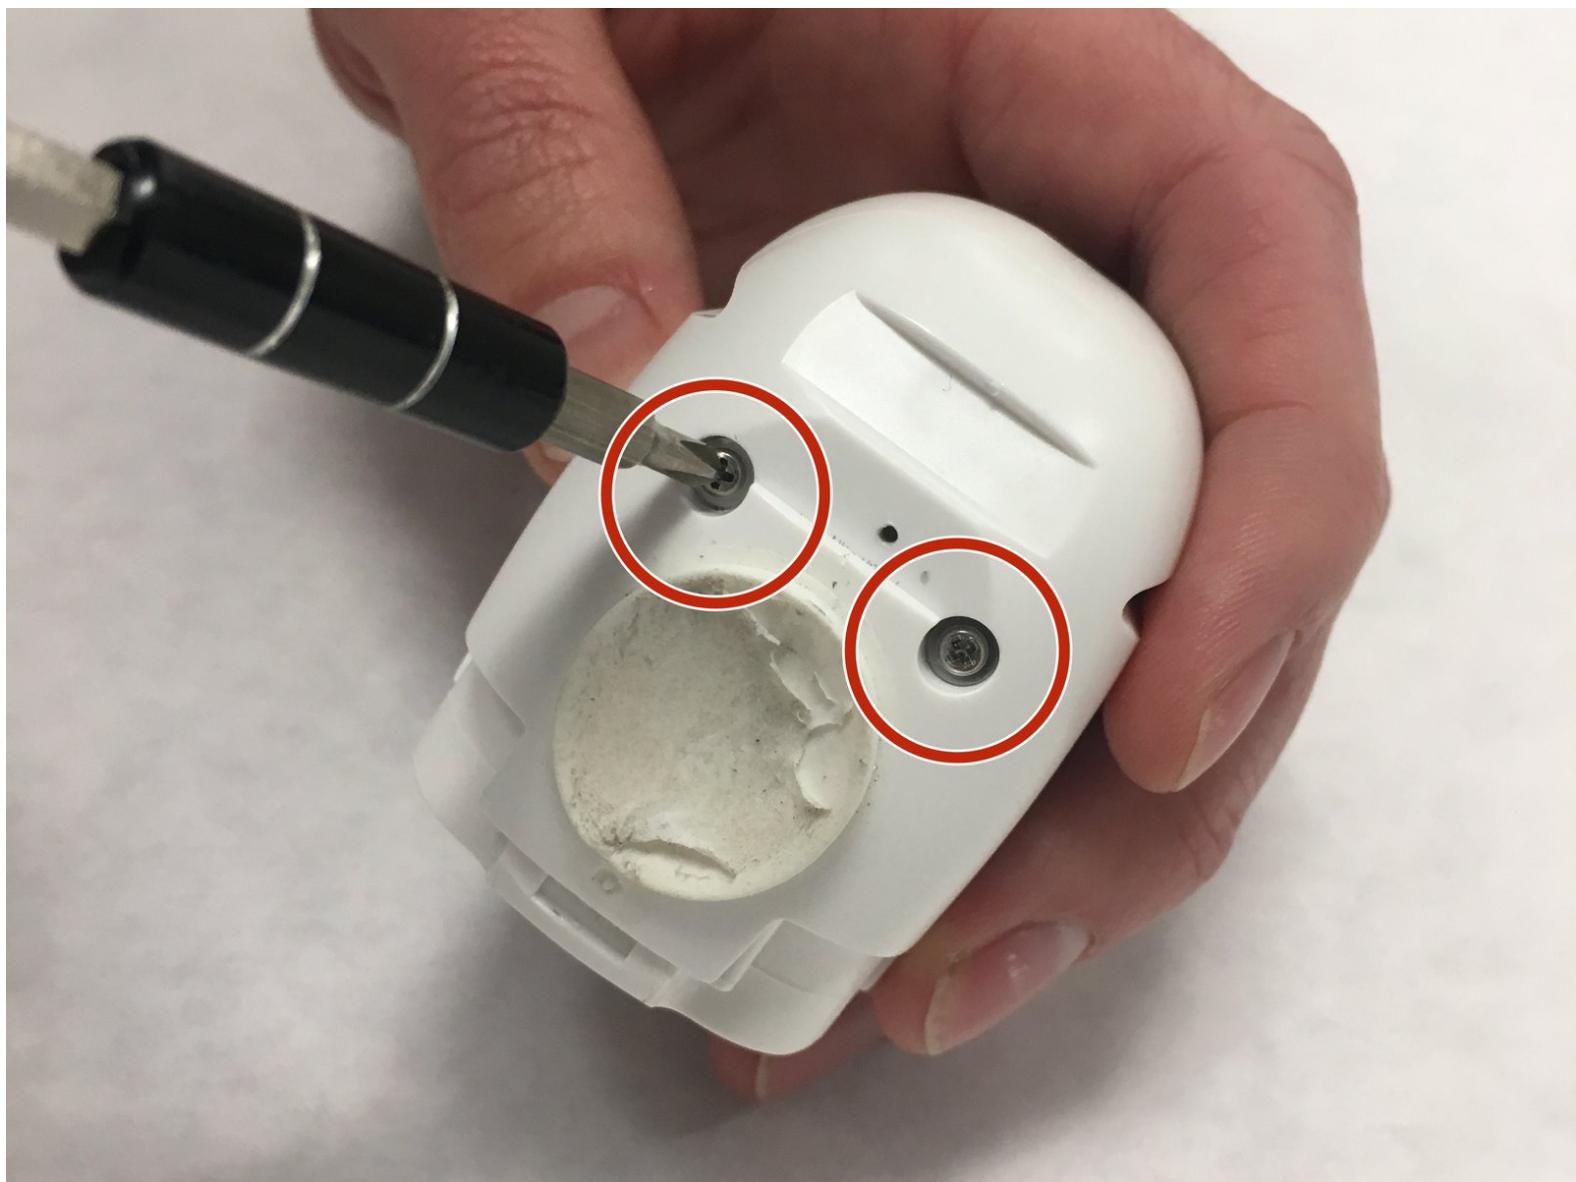

## INTRODUCTION

This is a step-by-step guide on how to remove the charging port in a Netgear Arlo

### TOOLS:

- Fingers (1)
- JIS #0 Screwdriver (1)
- iFixit Opening Tools (1)
- JIS #00 Screwdriver (1)

### PARTS:

- 3.7V Rechargeable Li-ion Arlo Battery (4)

## Step 1 — Plastic Housing



- Remove the 2 (3.5mm) housing screws with a J0 screwdriver.

## Step 2



- Slide the unlocked battery cover forward to remove 2 (3.5mm) screws, that are behind the cover.

## Step 3



- Open the battery cover and remove the 2 (3.5mm") screws from under the cover.

## Step 4



- Use a plastic opening tool to start separating the plastic housing from the front side of the battery cover.
- Next, start separating the plastic cover from the rear of the plastic housing, and work your way down the seam line.

① Make sure the plastics snaps on the front of the plastic get unhooked from the grey plastic ring around the front of the camera.

## Step 5



- Remove the screw (3.5mm) near the sync button holding the opposite side of the camera on.
- Remove the second screw (3.5mm) on the back of the camera to remove the second housing.
- Once the screws are removed use an opening tool to pry back the second plastic mount.


## Step 6 — Lens Assembly



- Remove 4 (6mm) large screws with a J00 screwdriver.


*(i)* There are 2 on each side. This will allow you to remove the clear housing from the white housing.

## Step 7

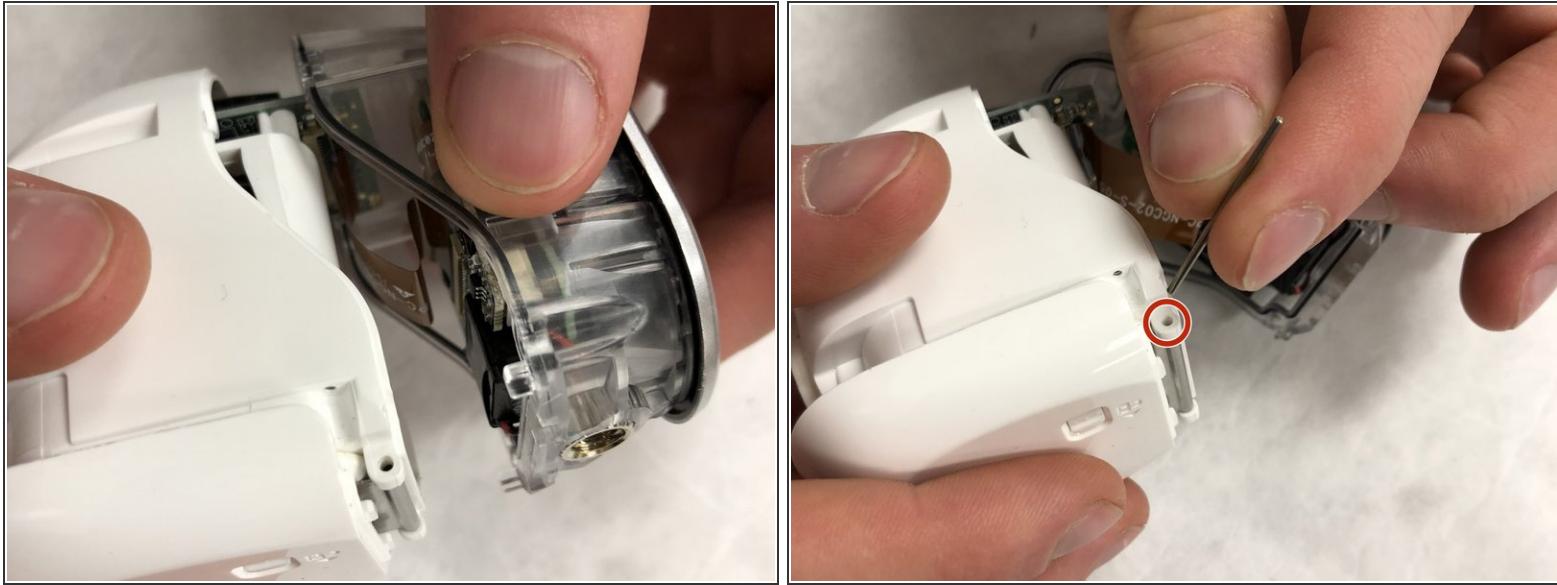


- Once screws are removed, pull apart the clear housing.
- Remove rod from camera cover.

## Step 8

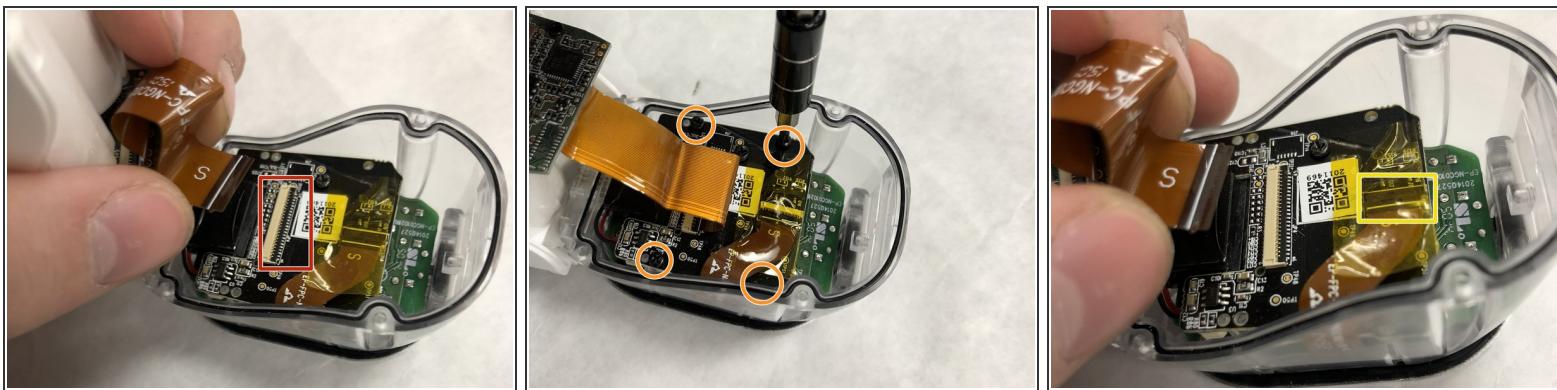


- Remove Large ribbon cable first to disconnect front of camera from main body.
- Remove 4 (3.5mm) small black screws from motherboard of the camera unit.
- Remove smaller ribbon cable from underneath yellow tape.

## Step 9

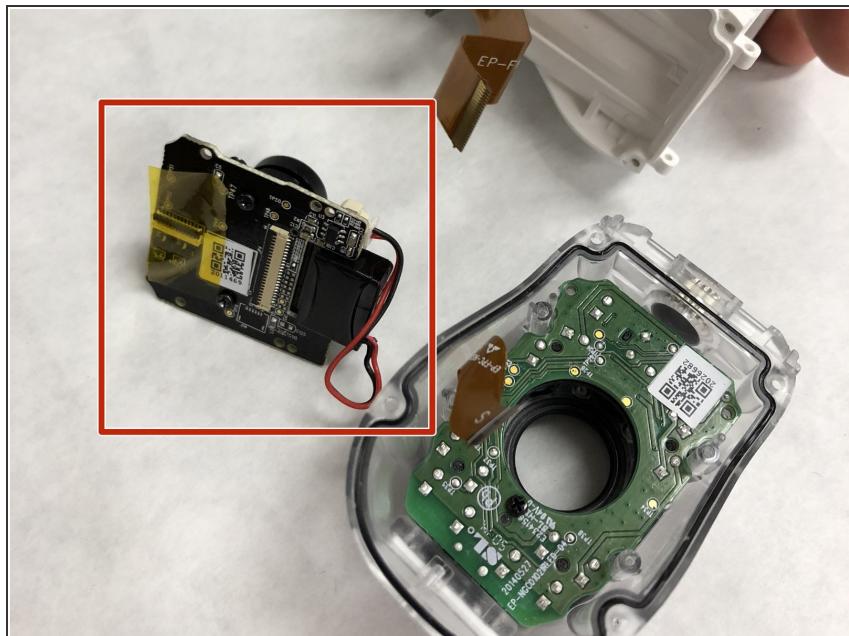


- Once all ribbon cables are removed, remove the motherboard and camera assembly by pulling up on the black camera motherboard.

## Step 10 — Charging Port

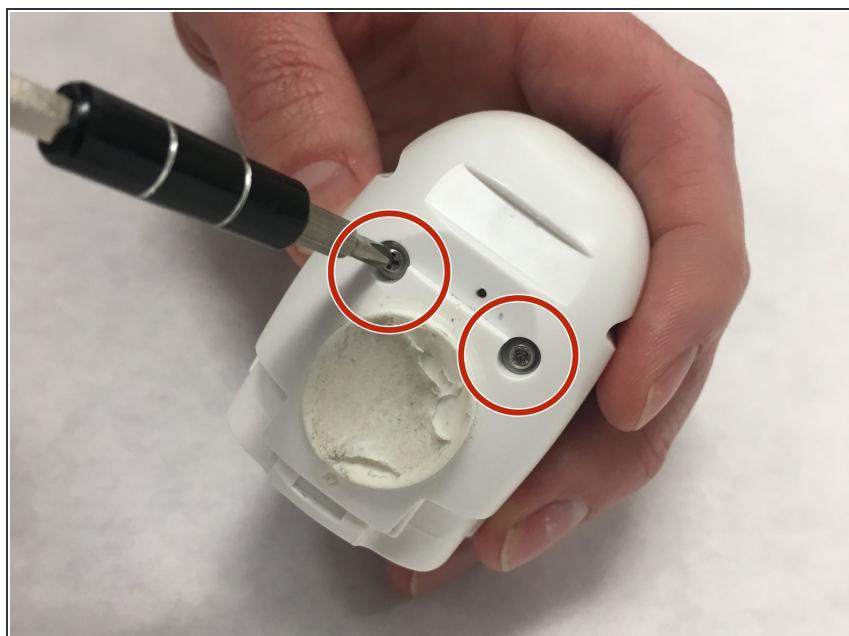


- Remove the 2 (.135") housing screws with a JIS00 screwdriver

## Step 11

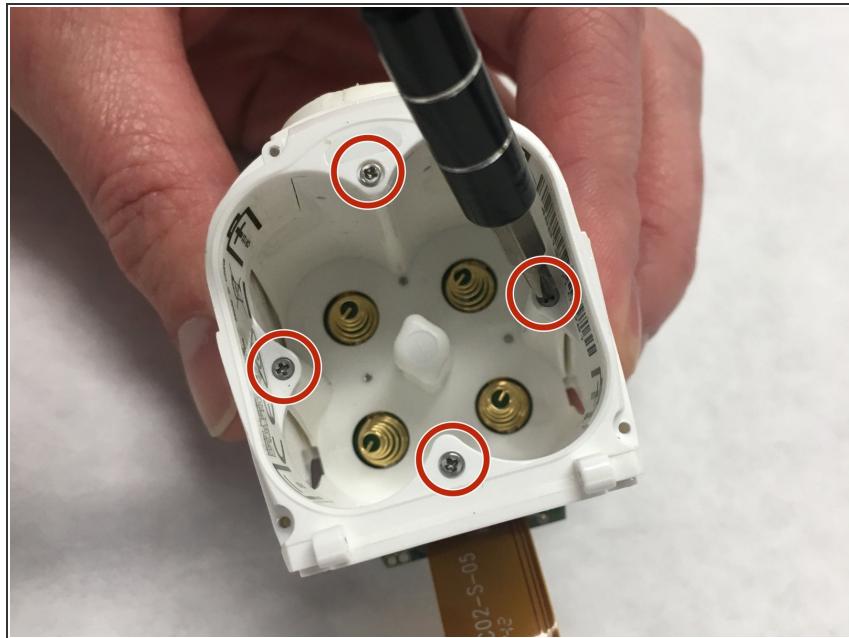


- Remove 4 (.135") screws on the inside of the battery compartment using the JIS 00 screwdriver.

## Step 12

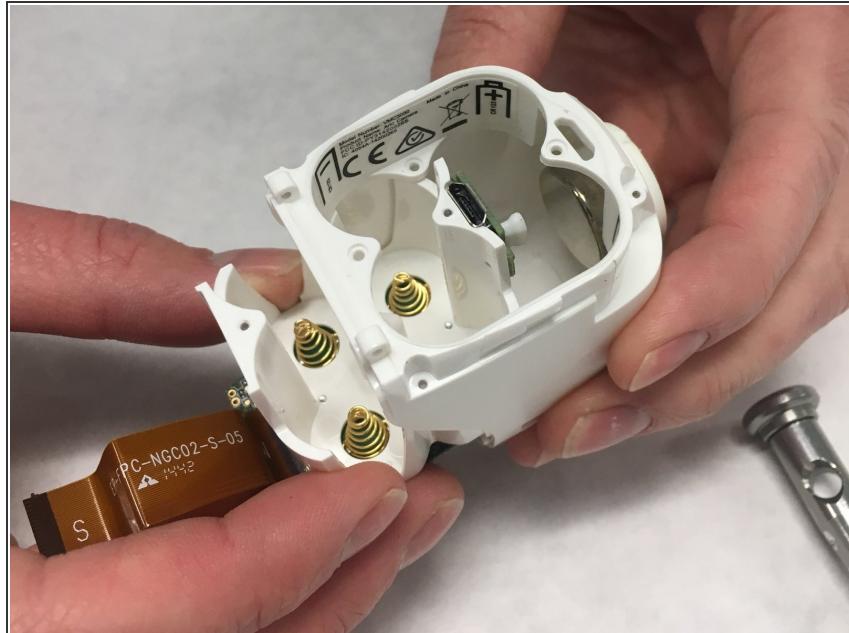



- Slide the two halves apart

## Step 13

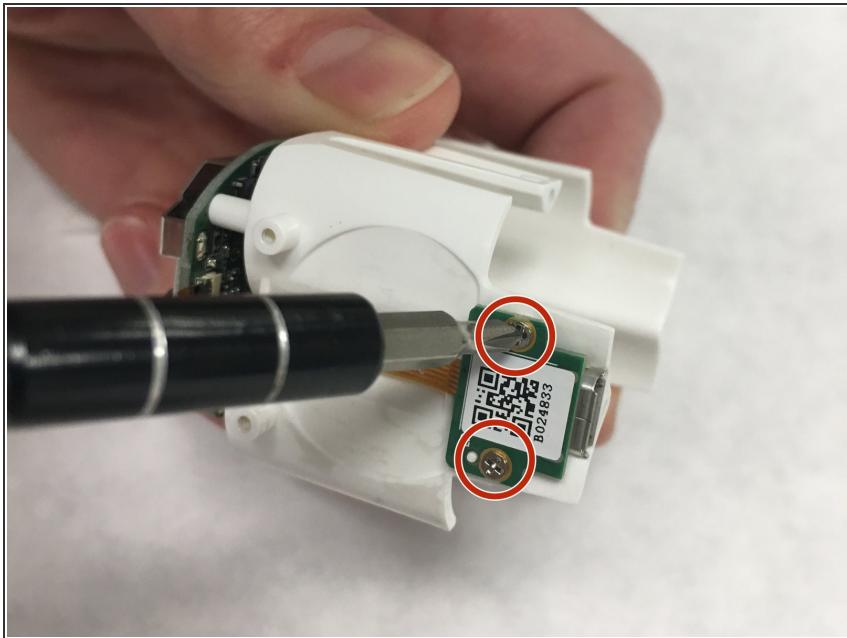

- Remove the 2 (.135") screws holding the charging port on using the JIS 00 screwdriver.

## Step 14

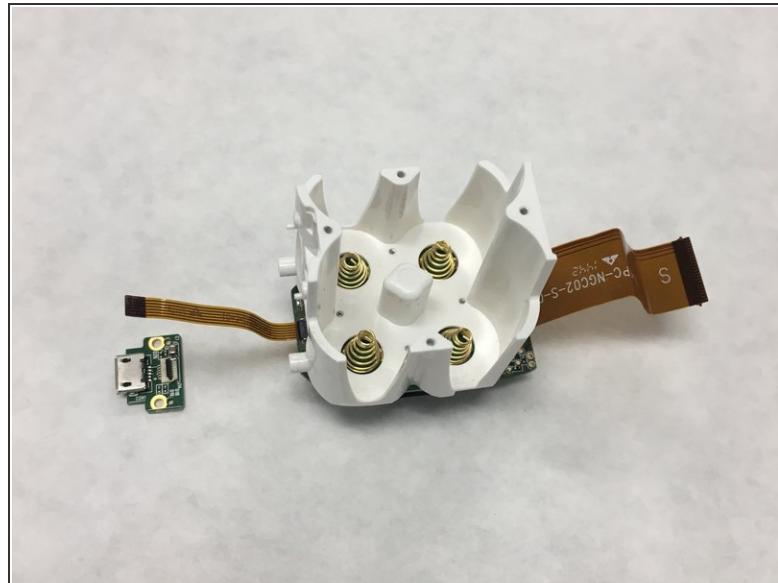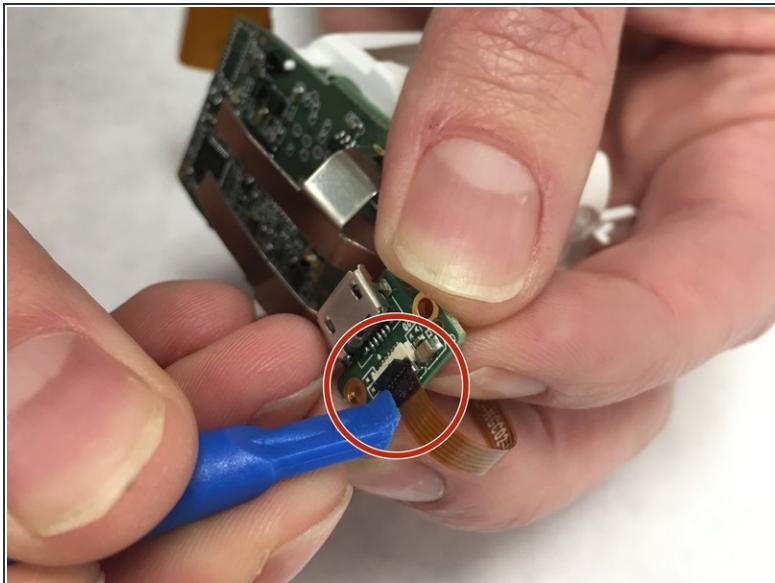

- Remove the ribbon by prying the black ribbon holder up using the opening tool.
- Pull the ribbon away from the charging port.

To reassemble your device, follow these instructions in reverse order.