



# New Nintendo 3DS Cover Plate Replacement

You can replace the Cover Plates on the New Nintendo 3DS system. This will help you replace the Cover Plates on the New Nintendo 3DS.

Written By: ethan2226



## INTRODUCTION

This guide will tell you how to replace the Cover Plates on the New Nintendo 3DS.

### TOOLS:

- Phillips #0 Screwdriver (1)
- New Nintendo 3DS Stylus (1)
- iFixit Opening Tools (1)

### PARTS:

- [New Nintendo 3DS Cover Plate #050 - Glow in the Dark Boo \(1\)](#)
- [New Nintendo 3DS Cover Plate - Kanji \(1\)](#)
- [New Nintendo 3DS Cover Plate #067 - Super Mario Maker \(1\)](#)
- [New Nintendo 3DS Cover Plate #056 - Legend of Zelda: Majora's Mask \(1\)](#)
- [New Nintendo 3DS Cover Plate #055 - The Legend of Zelda \(1\)](#)
- [New Nintendo 3DS Cover Plate #063 - Pokemon Super Mystery Dungeon \(1\)](#)
- [New Nintendo 3DS Cover Plate EU028 - Colorful Yoshis \(1\)](#)
- [New Nintendo 3DS Cover Plate - Style Savvy \(1\)](#)


## Step 1 — Placing the system on a flat table.



Ensure your device is powered off before proceeding. Failure to do so may result in electrical shock or damage to the device.

- Place the system on a flat stable surface.
- The Cover Plates will ONLY work with the New Nintendo 3DS. They are not compatible with New Nintendo 3DS XL or any other Nintendo system.

## Step 2 — Unscrewing the back cover plate.

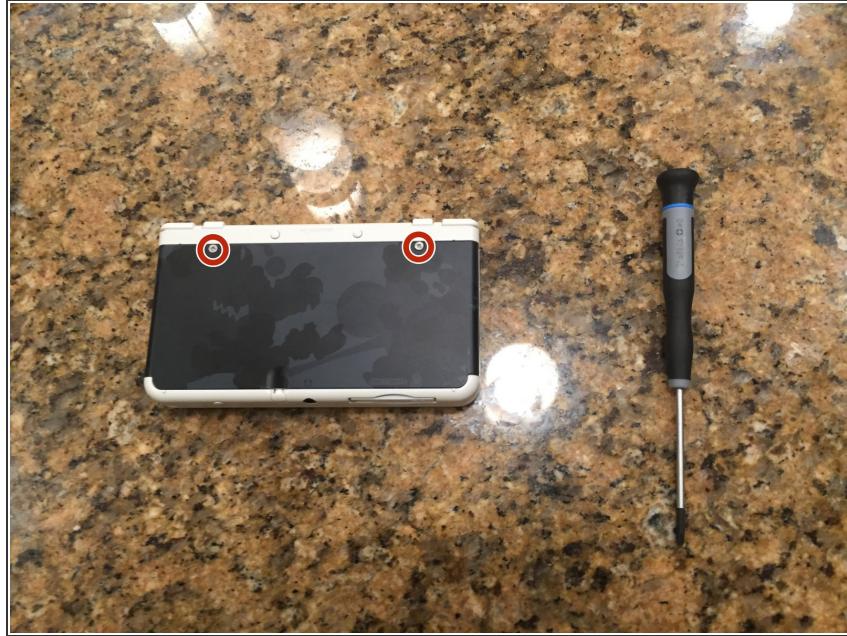

- Use a size #0 phillips-head screwdriver to loosen the screws from the back cover plate. The screws are attached to the cover, so they will not come out completely.

### Step 3 — Prying the back cover plate with the stylus.



- Use the nub on the end of the stylus or a plastic opening tool to gently pry on the small slots on each side near the L and R buttons. Once the cover plate begins to separate from the system, gently remove it.

## Step 4 — Prying the front cover plate with the stylus.




- Use the nub on the end of the stylus or a plastic opening tool to gently pry on the small slots on each side near the L and R buttons. Once the cover plate begins to separate from the system, gently remove it.

## Step 5 — Attaching the front cover plate.



- Attach the new front cover plate.

## Step 6 — Attaching the back cover plate.

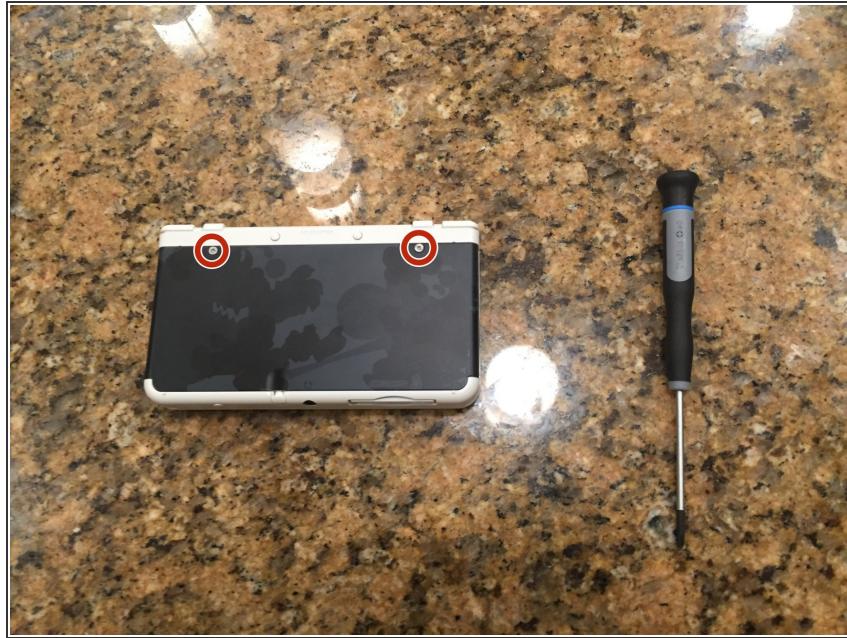

- Attach the new back cover plate and tighten the two #0 phillips-head screws.

You have changed the cover plates on your New Nintendo 3DS system.