




# Nexus One Antenna Cable Replacement

This guide is for installing the antenna cable on the Nexus One

Written By: Niklas Johnson

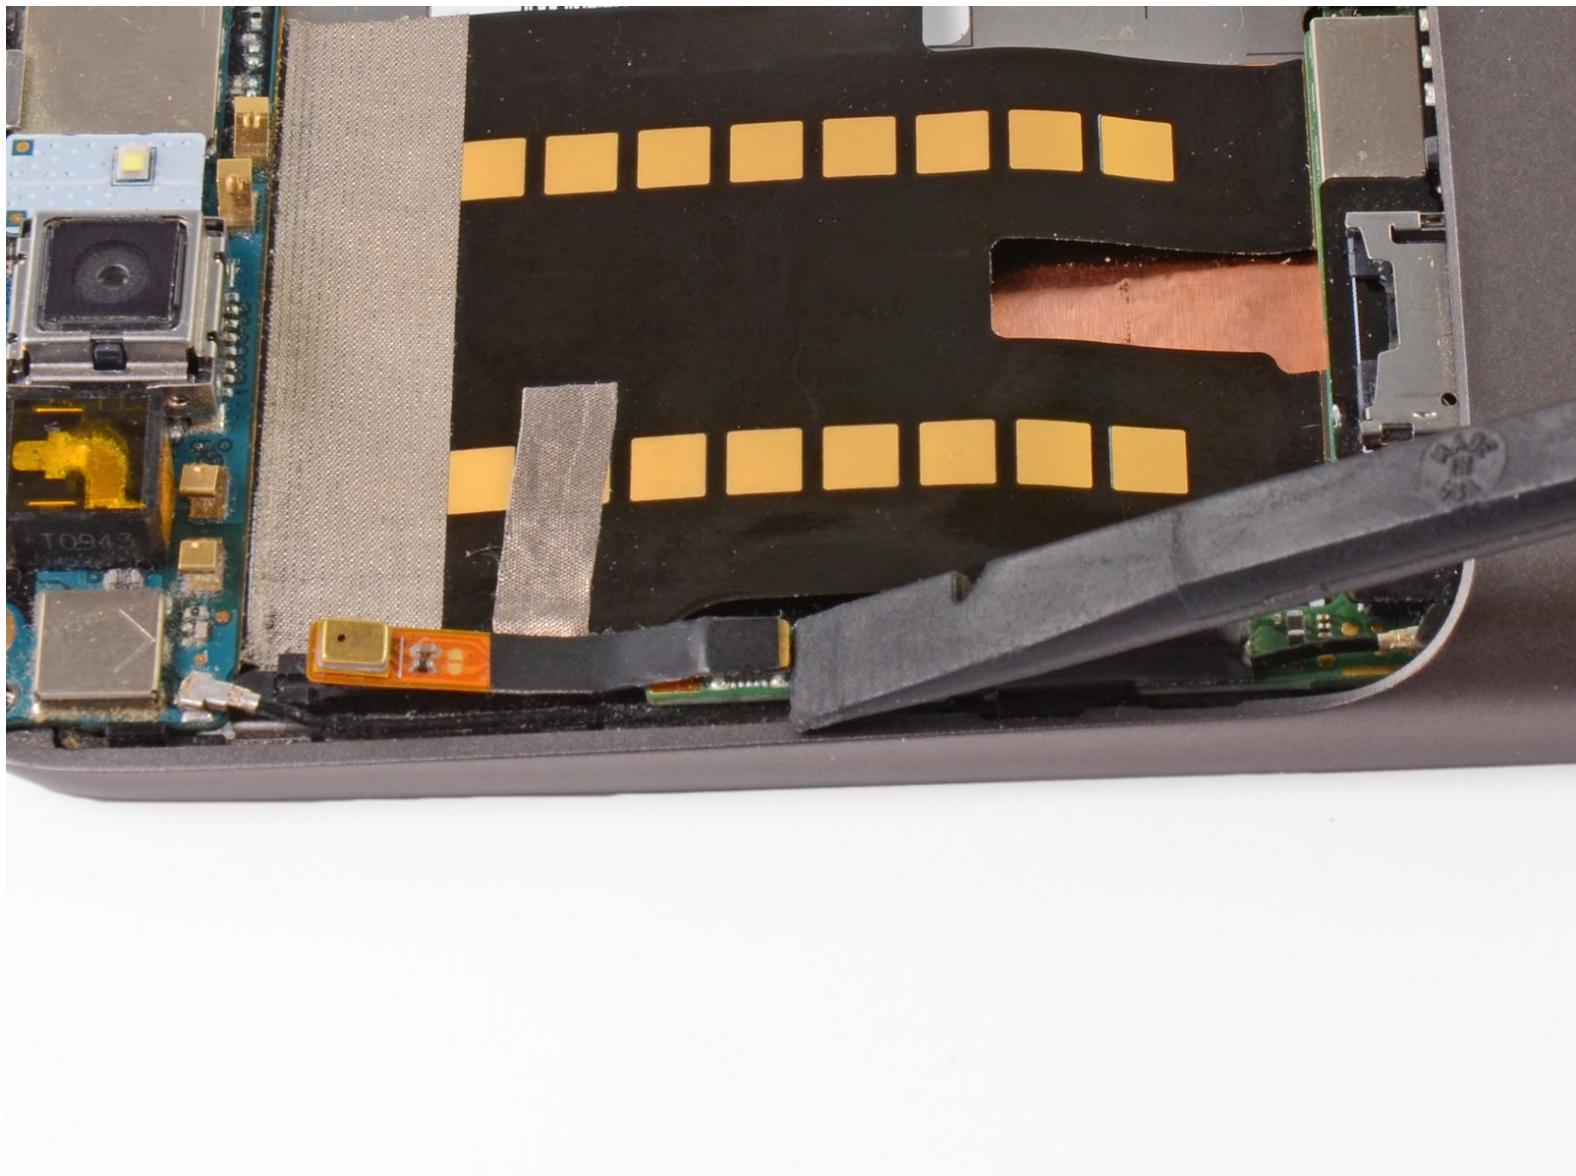

# INTRODUCTION

install the antenna cable

## TOOLS:

- [iFixit Opening Tools](#) (1)
- [T5 Torx Screwdriver](#) (1)
- [Phillips #00 Screwdriver](#) (1)
- [Spudger](#) (1)

## Step 1 — Rear Cover



- Using two fingers, push up on the rear cover.

## Step 2



- The rear cover slides up and off.

## Step 3 — Battery



- Using the plastic opening tools, pry the left bottom corner of the battery up.

## Step 4



- Pull the battery up and out.

## Step 5 — Battery Housing



- Remove the two Torx T5 screws.
- Remove the one Philips #00 screw.

## Step 6




- Using the plastic opening tool, pry up the battery housing upwards.
- Push pry tool down, undoing the plastic tab.

## Step 7



- Pry the upper left tab open on the battery housing.

## Step 8

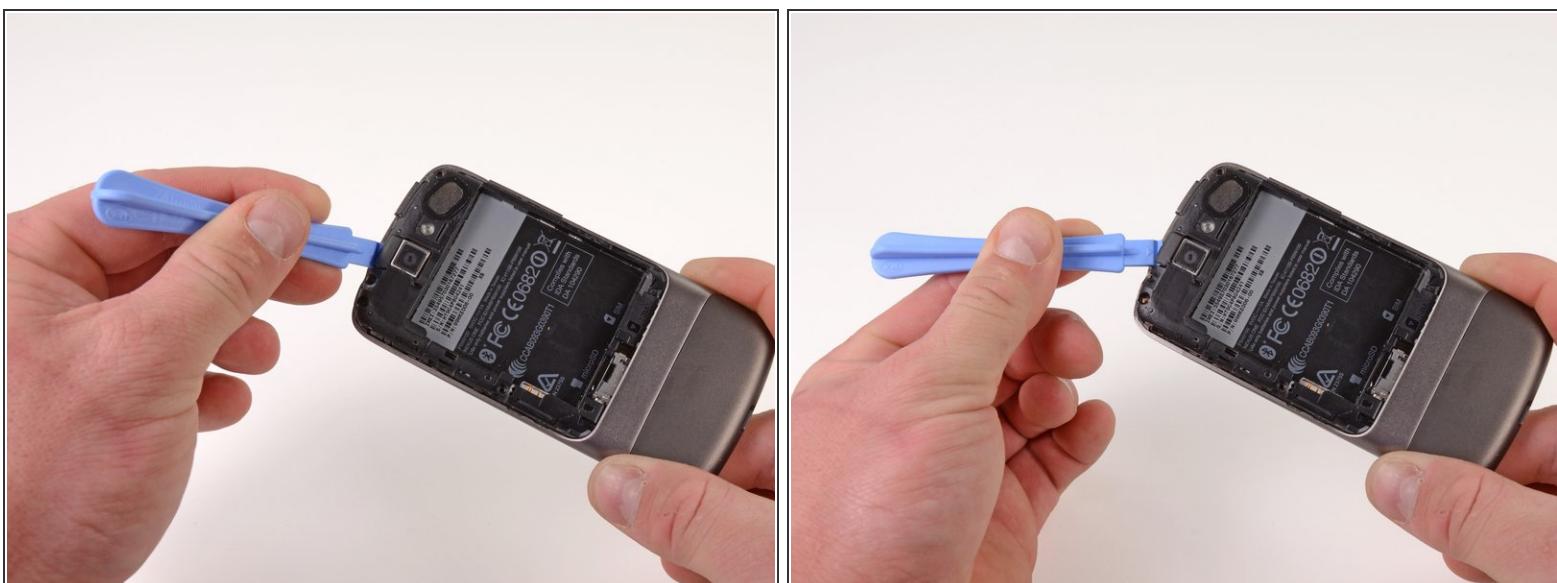


- Pry the top tab of the battery housing.

## Step 9




- Pry the right side tab of the battery housing.

## Step 10

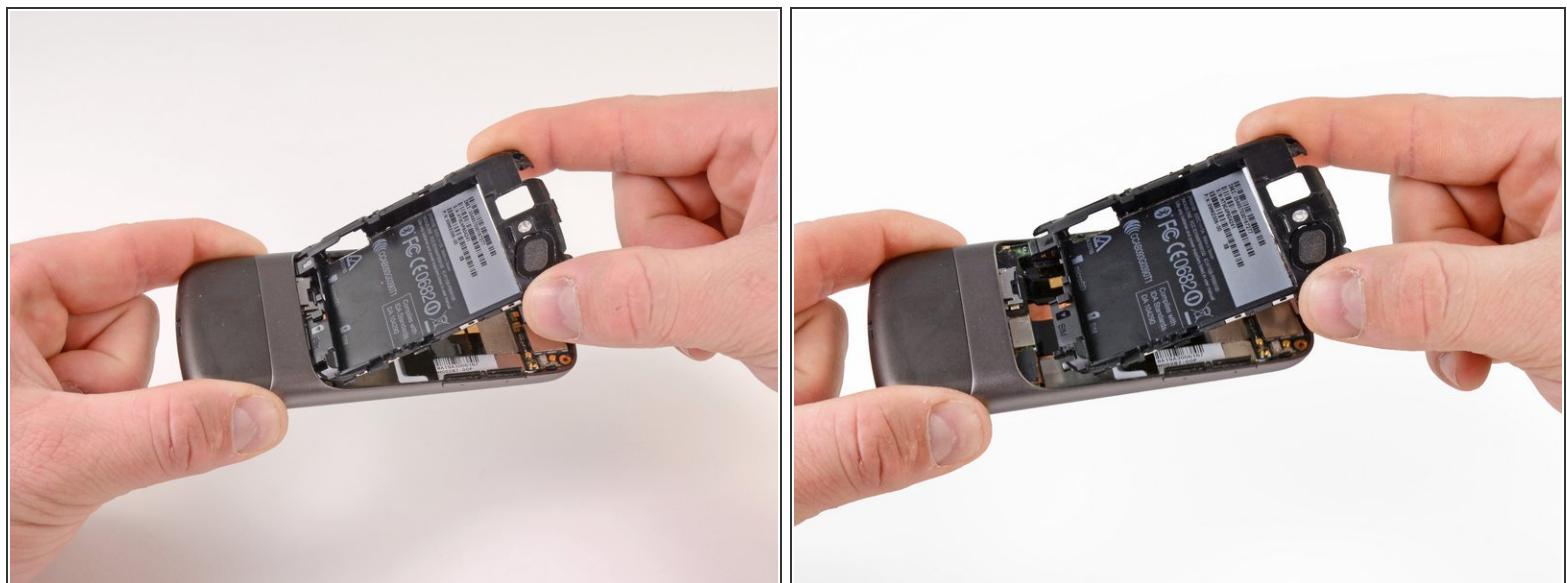


- Pull up on the battery housing.
- Slide the battery housing out to remove it.

## Step 11 — Antenna Cable

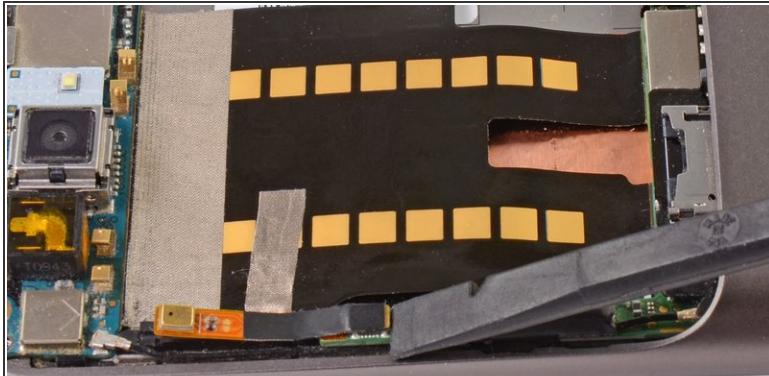

- Pry the antenna cable up.

## Step 12

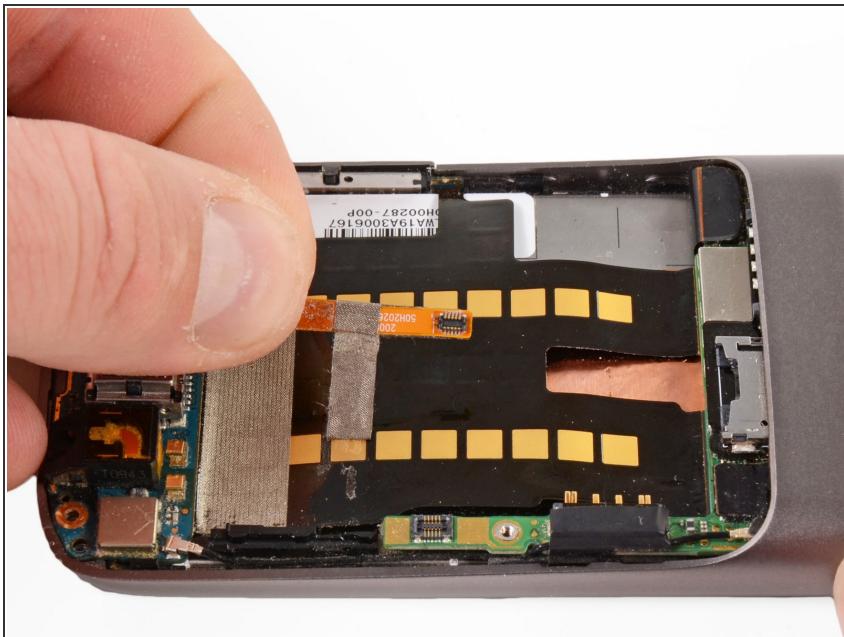

- Carefully pull up on the microphone board to release the tape from the phone.

To reassemble your device, follow these instructions in reverse order.