



Nexus One Secondary Microphone Replacement

This guide is for installing the secondary microphone on the Nexus One

Written By: Niklas Johnson



 **TOOLS:**

- [iFixit Opening Tools \(1\)](#)
- [Phillips #00 Screwdriver \(1\)](#)
- [T5 Torx Screwdriver \(1\)](#)

Step 1 — Rear Cover



- Using two fingers, push up on the rear cover.

Step 2



- The rear cover slides up and off.

Step 3 — Battery



- Using the plastic opening tools, pry the left bottom corner of the battery up.

Step 4



- Pull the battery up and out.

Step 5 — Battery Housing



- Remove the two Torx T5 screws.
- Remove the one Philips #00 screw.

Step 6




- Using the plastic opening tool, pry up the battery housing upwards.
- Push pry tool down, undoing the plastic tab.

Step 7



- Pry the upper left tab open on the battery housing.

Step 8

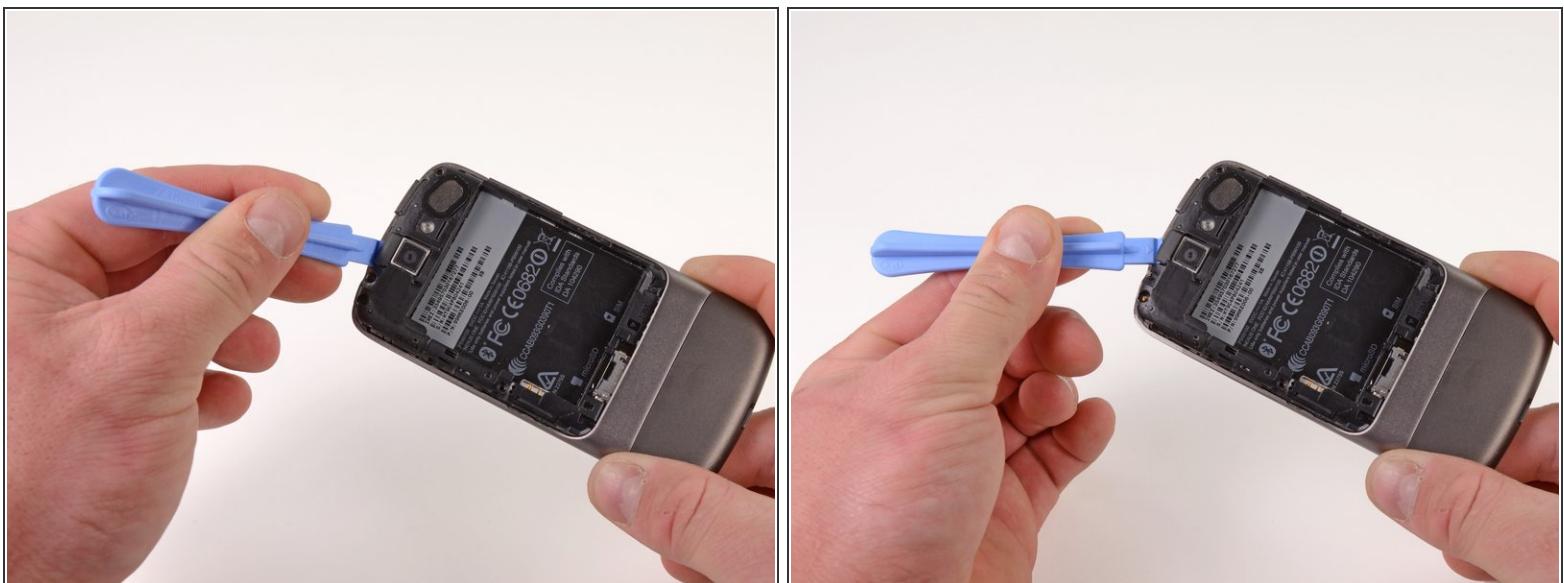


- Pry the top tab of the battery housing.

Step 9



- Pry the right side tab of the battery housing.

Step 10

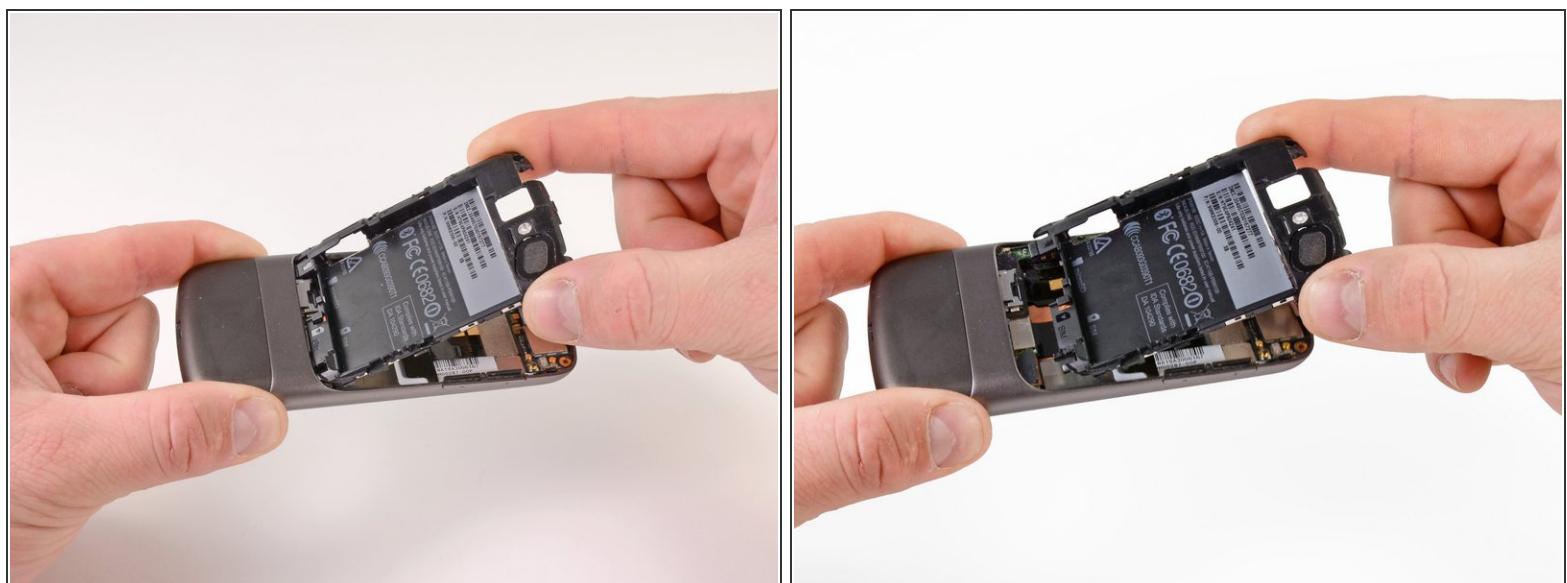


- Pull up on the battery housing.
- Slide the battery housing out to remove it.

Step 11 — Secondary Microphone



- Using the spudger, pry upwards on the second microphone connector.

Step 12

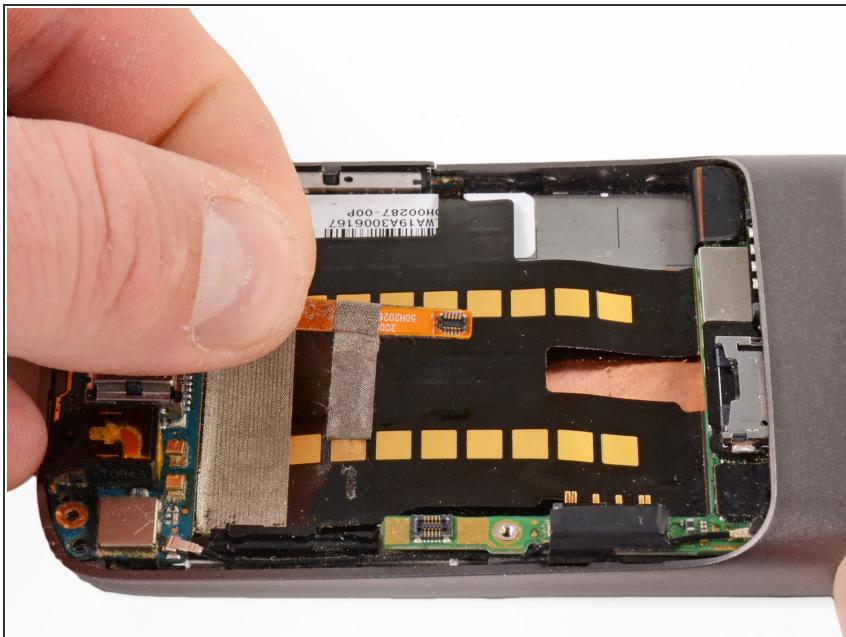

- Pull up on the ribbon cable, the tape will detach from the main board ribbon.

To reassemble your device, follow these instructions in reverse order.