




Nokia 1010 Motherboard Replacement

This guide will show you how to replace the motherboard.

Written By: Mikala Presho

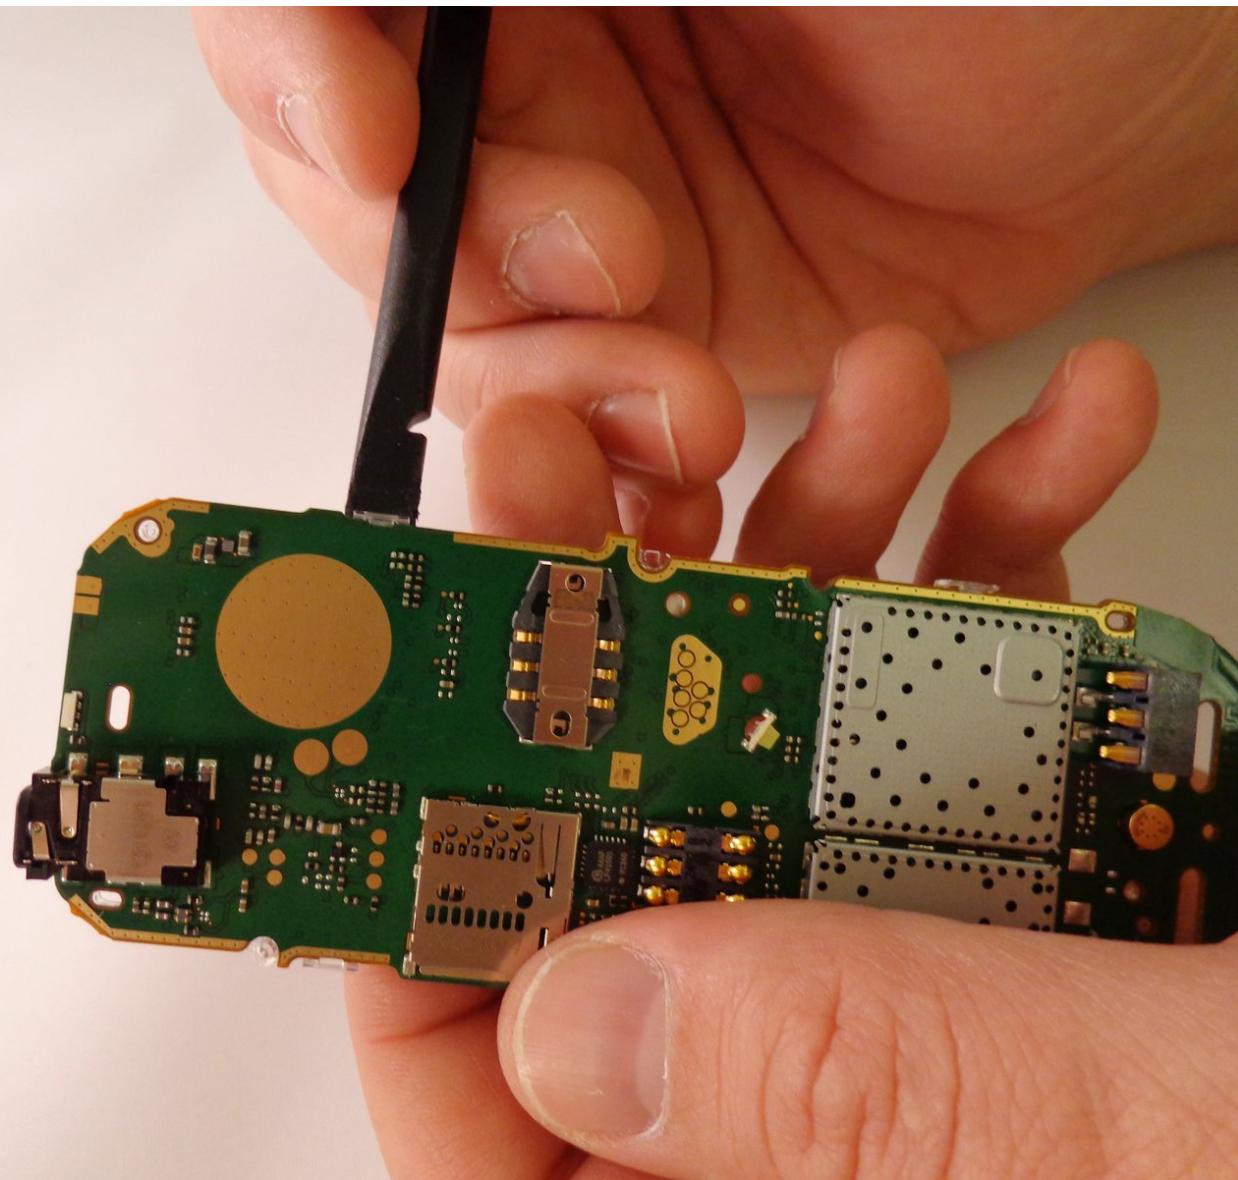

INTRODUCTION

This guide will give you step by step instructions on how to replace the motherboard. If you are having technical difficulties and this is may be related to the motherboard, this guide will give you full access to the motherboard system.

TOOLS:

- [Spudger \(1\)](#)
- [iFixit Opening Tools \(1\)](#)

Step 1 — Battery



- Using your thumbs, press and slide down the back cover of the Nokia 1010.

Step 2





- Insert the prying tool in the notch above the battery.
- Once the prying tool is inserted, lift up the battery.

Step 3 — Faceplate



- Insert the prying tool between the seam of the faceplate and the body.

Step 4

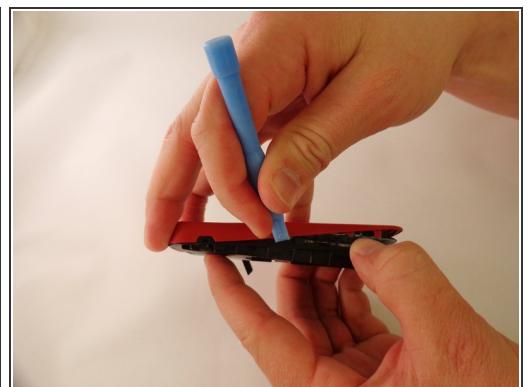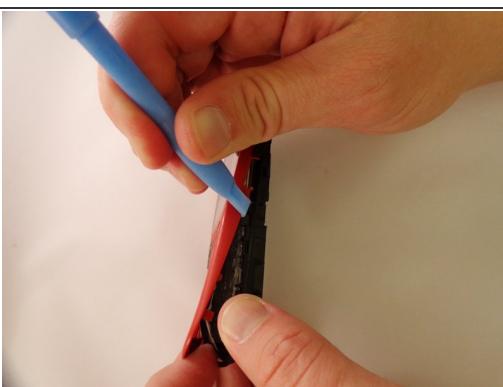

- Starting from the bottom of the phone, begin prying around the base of the phone alternating from left to right.

Step 5



- As the base loosens, slowly increase the separation between the plates and the body of the phone.

Step 6 — Motherboard



- Using the spudger, pry back three tabs located on the left edge and three tabs located on the right edge of the body.

Step 7



- Once detached, lift and remove the faceplate from the motherboard.

To reassemble your device, follow these instructions in reverse order.