



Nokia 2605 Teardown

This guide will give step-by-step instructions on how to take the cellphone apart and how to put it back together.

Written By: Dorsa



 **TOOLS:**

- [T5 Torx Screwdriver \(1\)](#)
- [iFixit Opening Tools \(1\)](#)

Step 1 — Nokia 2605 Teardown



- Red arrows indicate which screws must be removed in order to get to the motherboard.

Step 2




- Take T5 torx and remove all 3 screws.

Step 3



- Wedge a flat head in between the back and phone exterior starting at the bottom corners.
- As you move toward the top, remove the camera and volume buttons.

Step 4

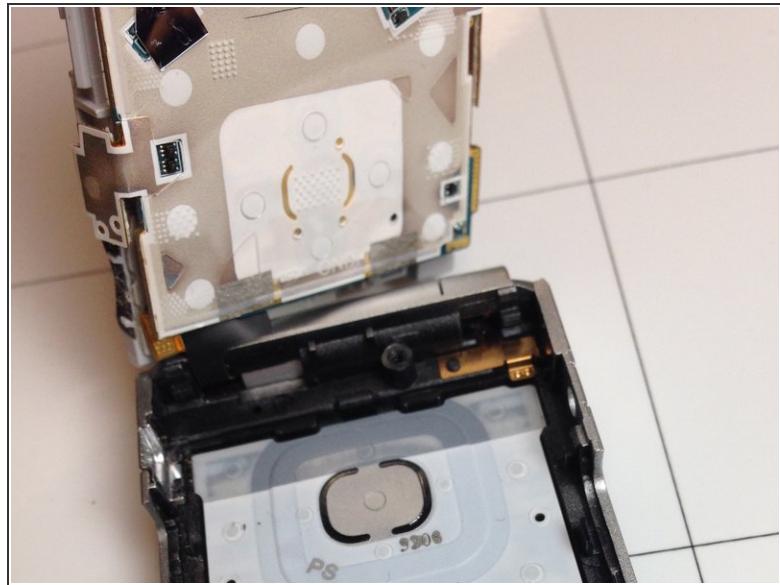

- Remove the back, being careful not to detach the motherboard from the back and to not pull them fully out (both attached at the upper left corner by a black strip).

To reassemble your device, follow these instructions in reverse order.

This document was generated on 2019-09-20 09:05:21 AM (MST).

