



# Nokia 2630b Screen / Front Case Replacement

Written By: Eric



## INTRODUCTION

In this guide, we outline how to unscrew and remove the front case from the Nokia 2630b. This grants access to the LCD screen cover and the keyboard.

### TOOLS:

- [iFixit Opening Tools](#) (1)

*Either size should work for this repair.*

- [T5 Torx Screwdriver](#) (1)


*The size of the screwdriver head is usually written on the tool.*

## Step 1 — Battery Case




- Press the release buttons located on either side of the battery cover
- *i* Pull the battery cover away from the phone

## Step 2

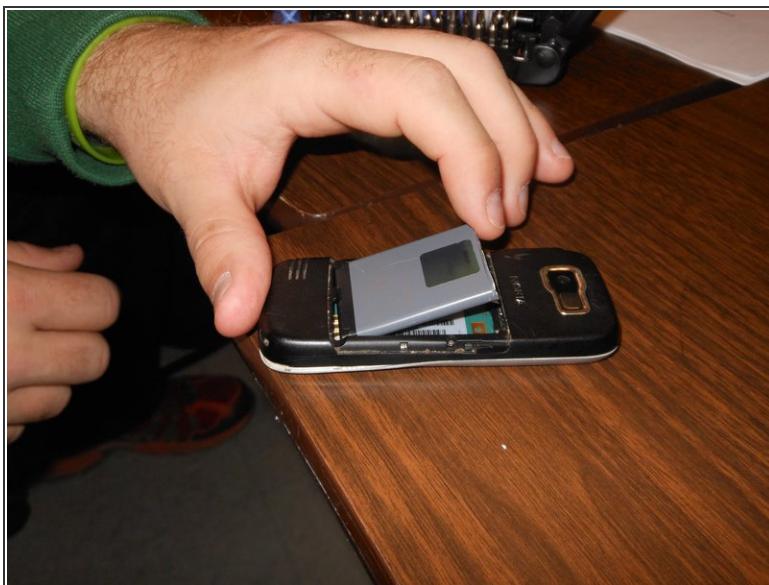

- Gently pull the battery out of the phone with your fingers

## Step 3 — Screen / Front Case

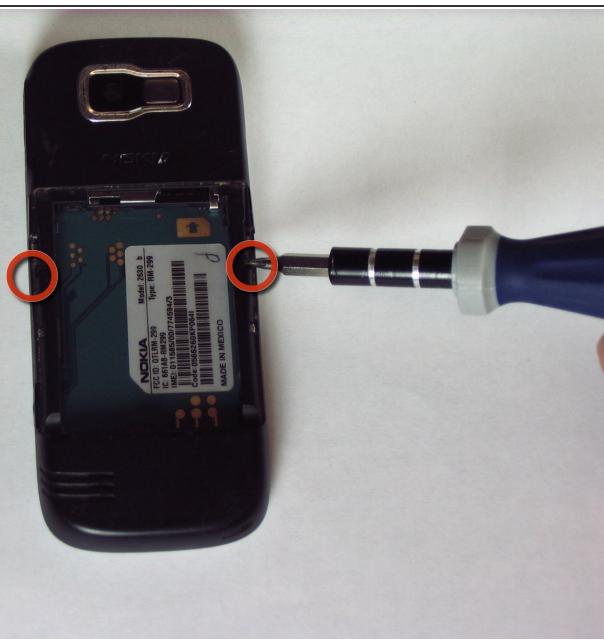

- Remove the two screws on either side of the battery case using the microscrewdriver using the T5 bit
  - *i* The T5 bit has a star shaped end and has "T5" engraved on the side of the bit for easy identification
- NOTE: Keep the screws in a safe place while you continue working.


## Step 4



**⚠** Separate the front case from the back case using the iPod opener


**⚠** NOTE: The keypad is a loose piece and may fall out

## Step 5

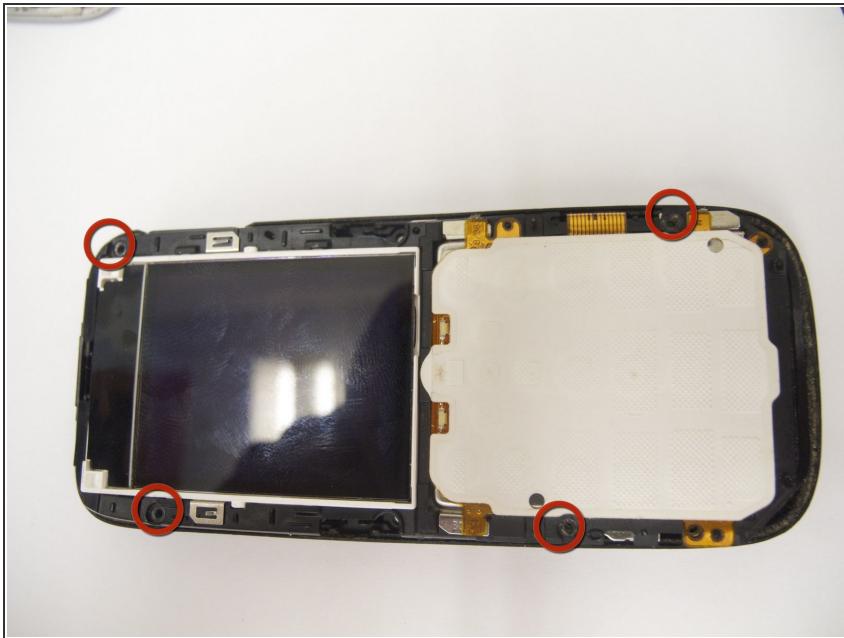


- Remove screws using the same T5 screw bit to release the computer chip from the case
- NOTE: Keep the screws in a safe place while you continue working

## Step 6

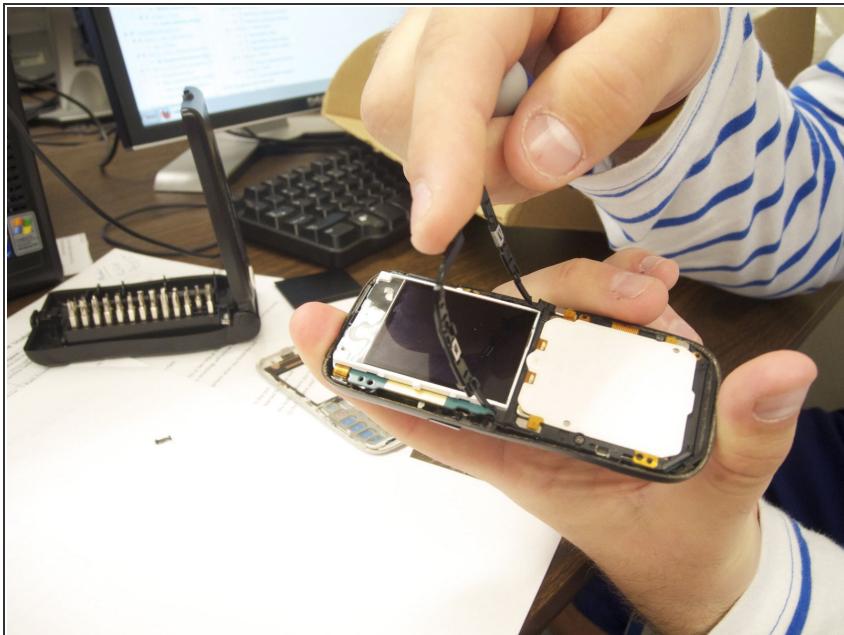


- Carefully lift the black frame off the screen with your fingers

## Step 7

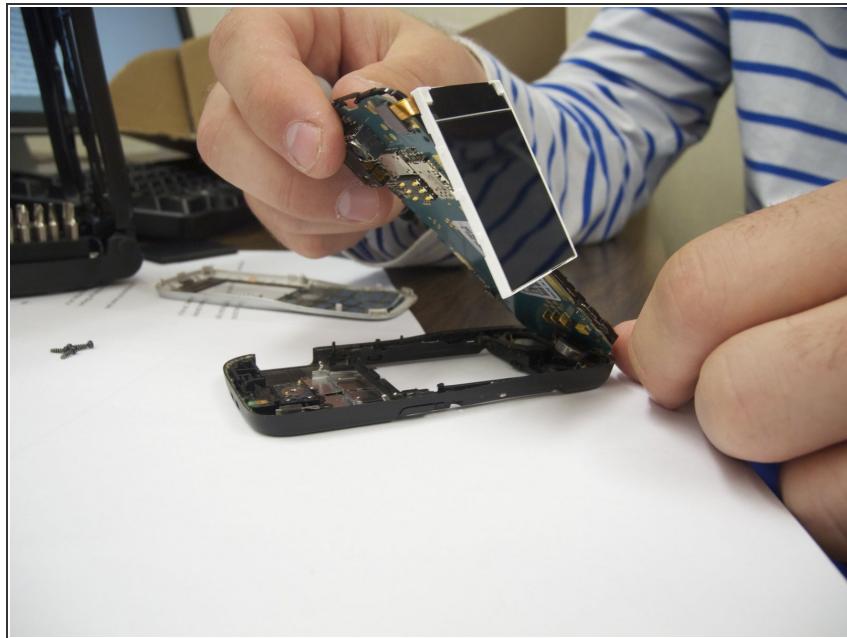

- Carefully remove the computer chip and screen out of the black case with your fingers

## Step 8

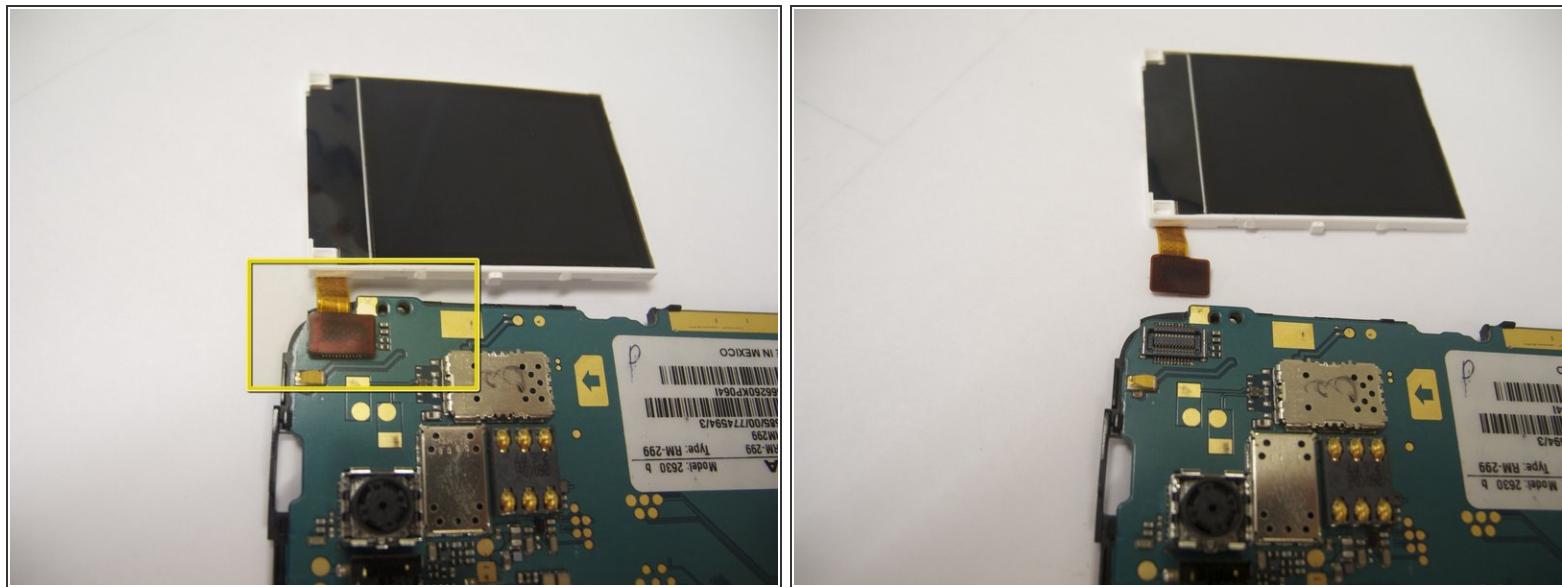


- The screen is attached to the motherboard by an orange ribbon
- Carefully detach the ribbon from the motherboard using your fingers

## Step 9




- Reattach new screen by connecting the orange ribbon to the computer chip

## Step 10

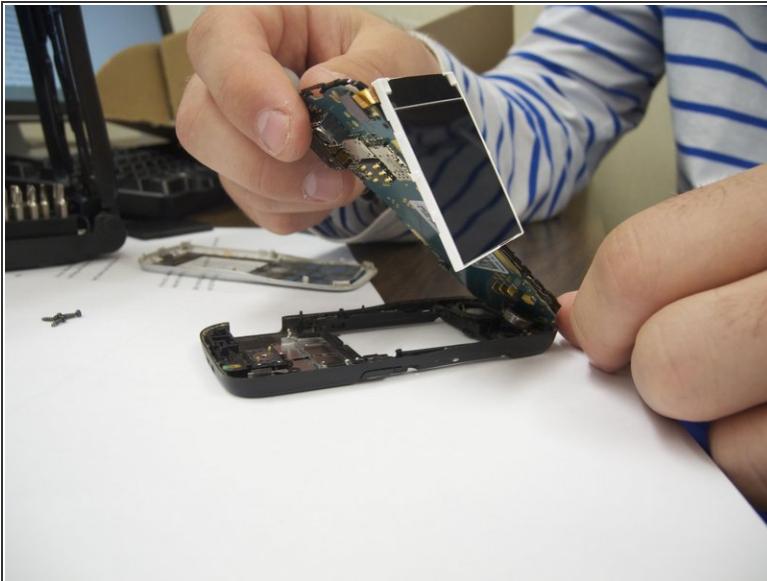


- Place computer chip and screen back into black case

## Step 11

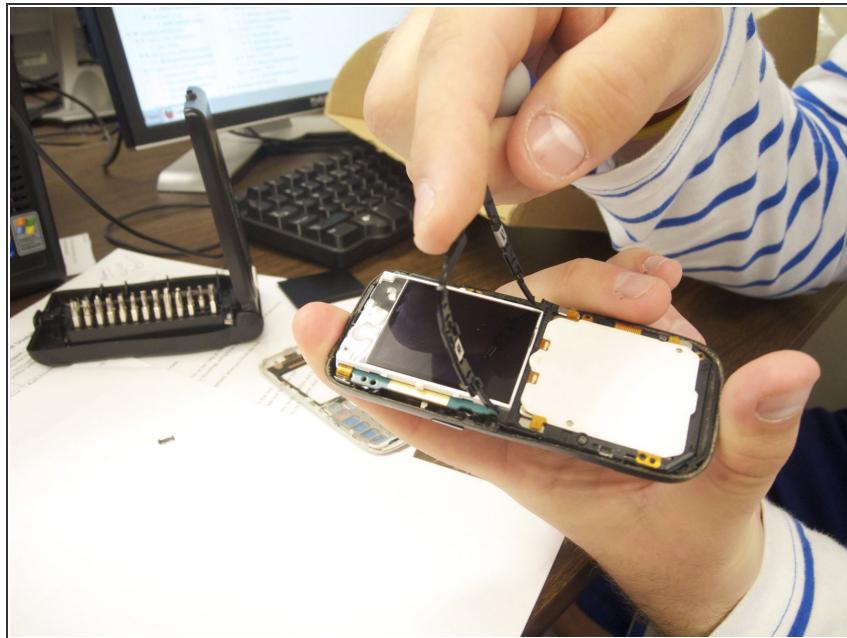



- Place black frame back over screen

## Step 12

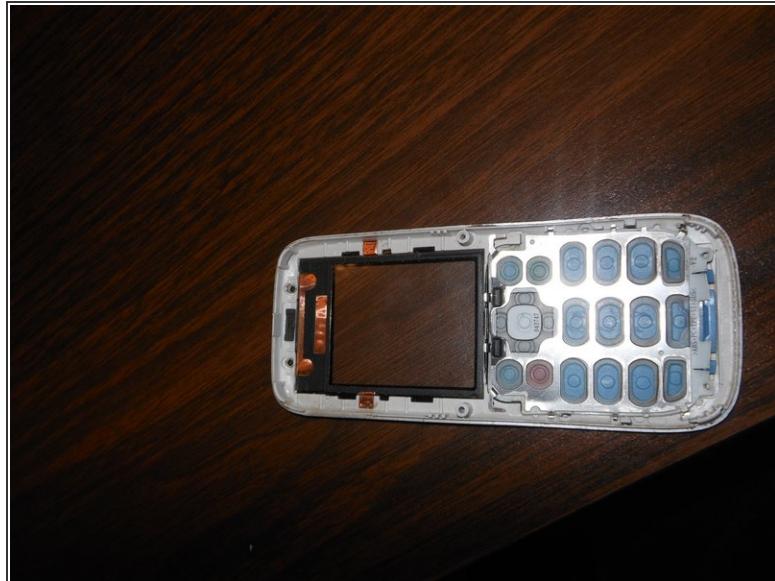


- Carefully place keypad back in place

## Step 13

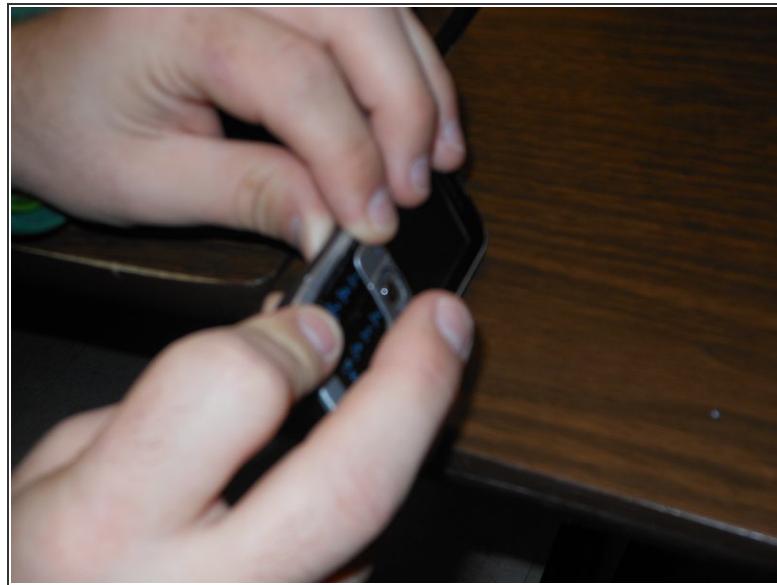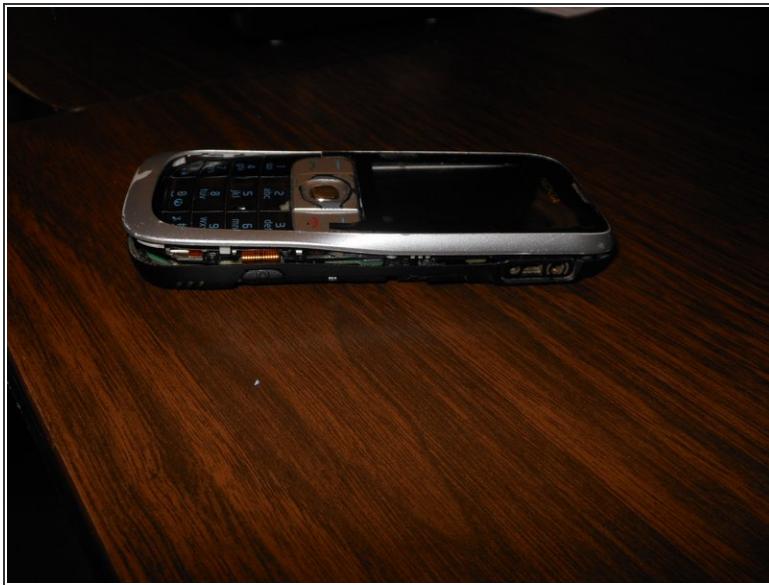

- Snap the front case back in place with the bottom case with your fingers

## Step 14

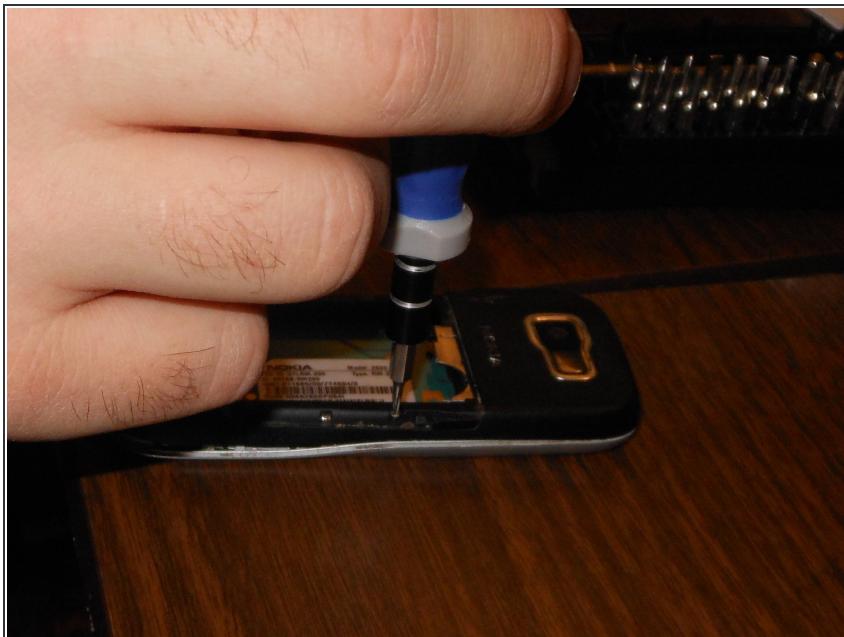

- Reassemble screws with microscrewdriver

## Step 15



- Slide battery back into place

## Step 16



- Snap battery cover back into place

To reassemble your device, follow these instructions in reverse order. Make sure to snap the new screen / front case securely into place.

