




Nokia 6590i Speaker Replacement

remove the Phone's speaker

Written By: Colby Leslie

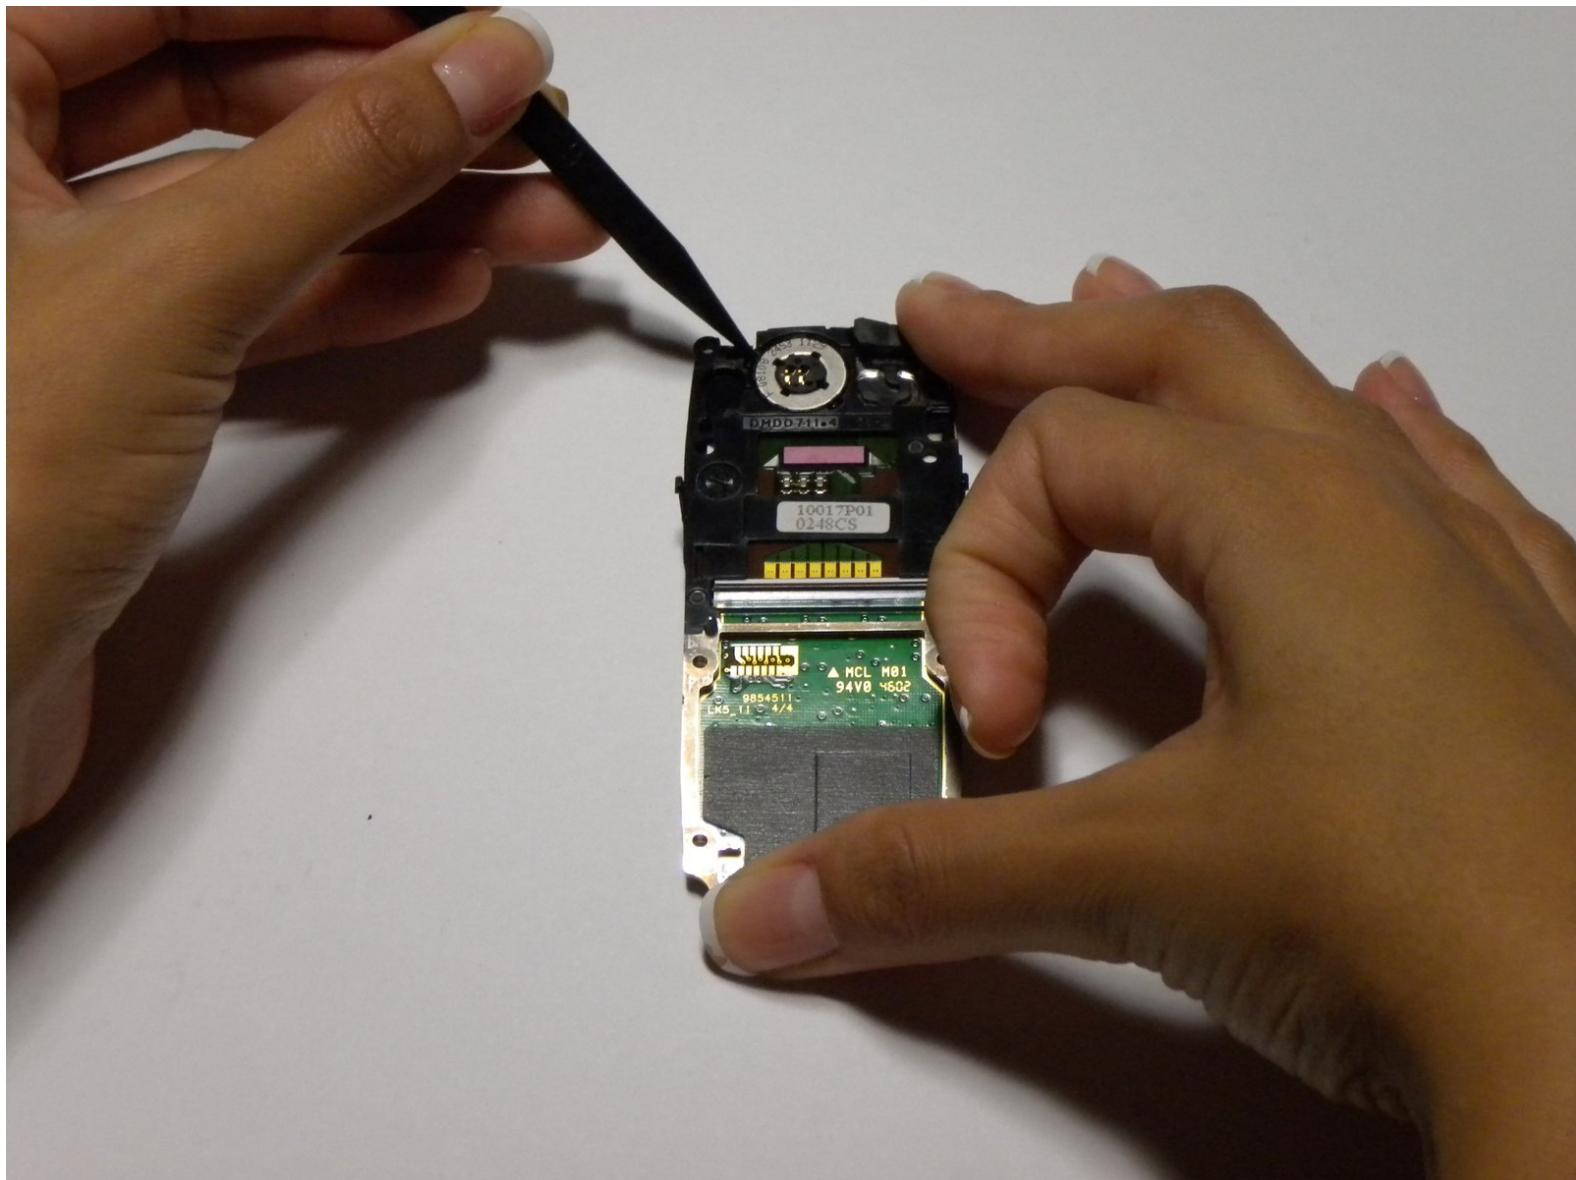


INTRODUCTION

This guide will show you how to remove the Speaker from the phone.

TOOLS:


- [Spudger \(1\)](#)
- [T6 Torx Screwdriver \(1\)](#)

Step 1 — Battery

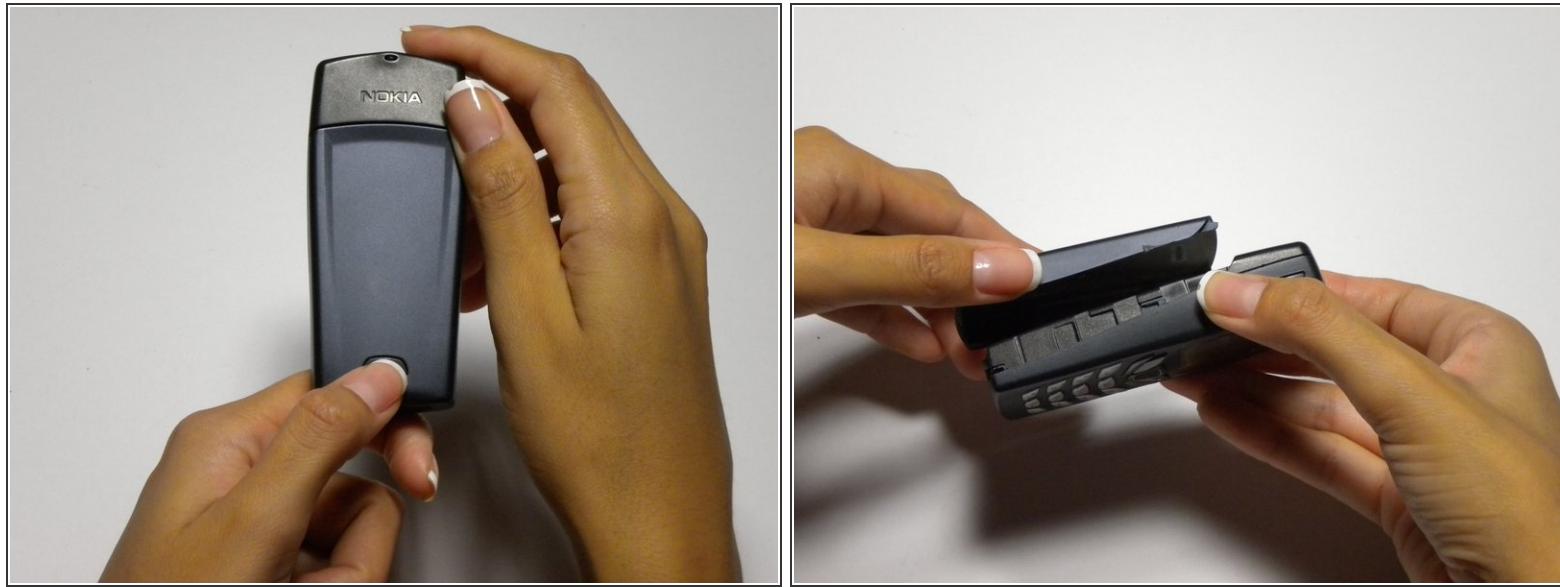

- Press the button to remove the back cover.
- Pull the cover downward and lift it off while still pressing the button.

Step 2

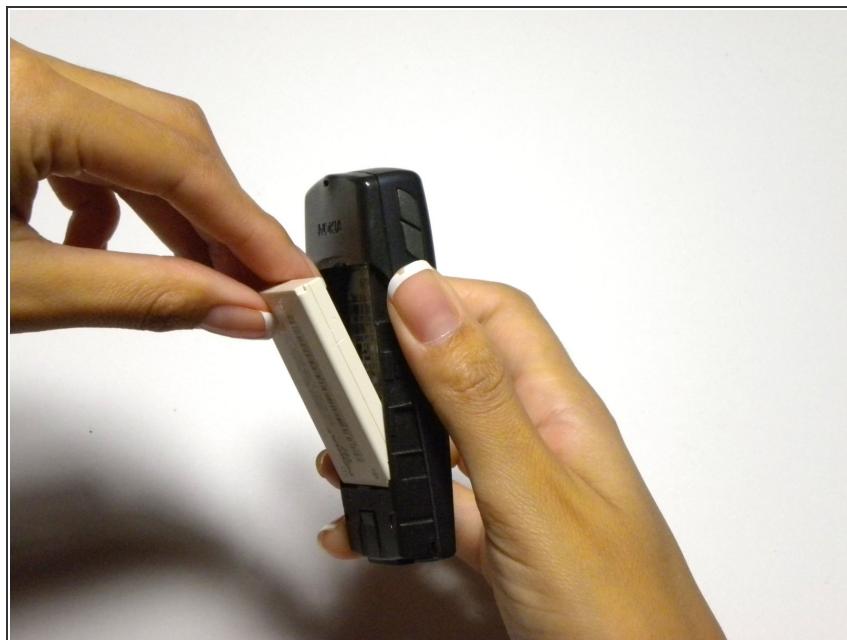

- Lift the battery out of the phone by pushing down from the top and pulling out

Step 3 — Keypad, Speaker, and Screen Assembly



- Grip the front cover from the bottom.

Step 4




- Lift the front cover off.

Step 5




- Locate 6 screws on front of assembly and unscrew them using a T6 torx screwdriver.

Step 6

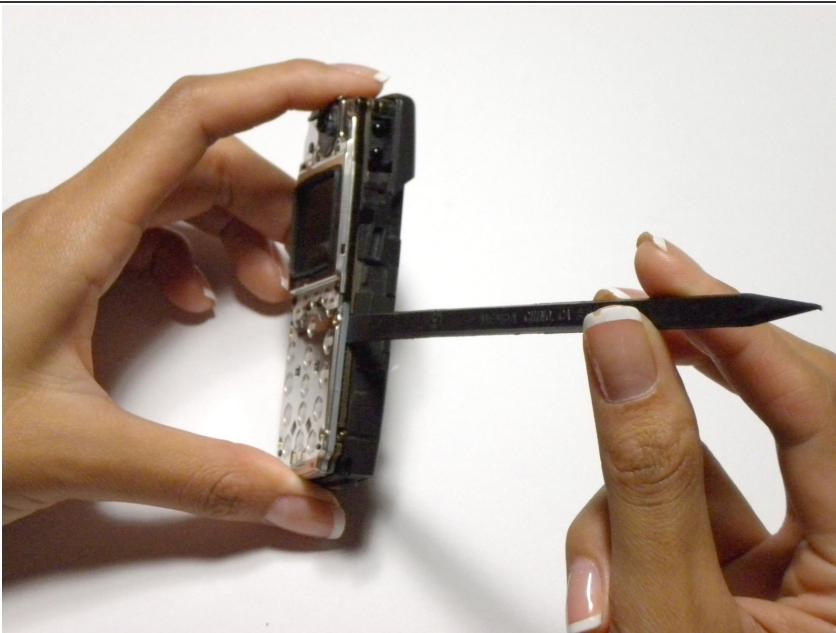

- Insert spudger along edge of assembly and gently lift assembly away from case

Step 7

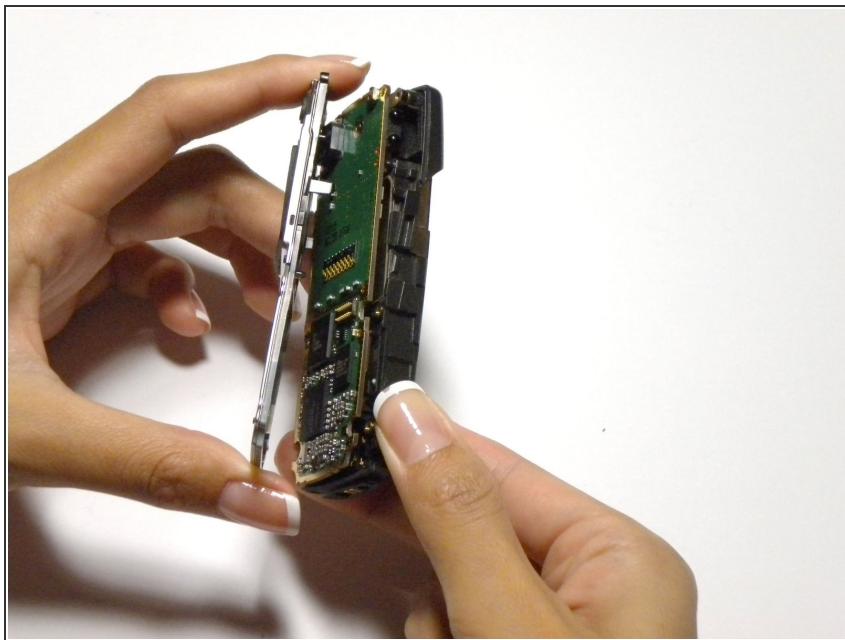

- Remove assembly from phone

Step 8 — Speaker



- Flip assembly over


Step 9

- Locate speaker on the back of the assembly.



Step 10

- Insert spudger under upper left side of speaker and gently lift to remove

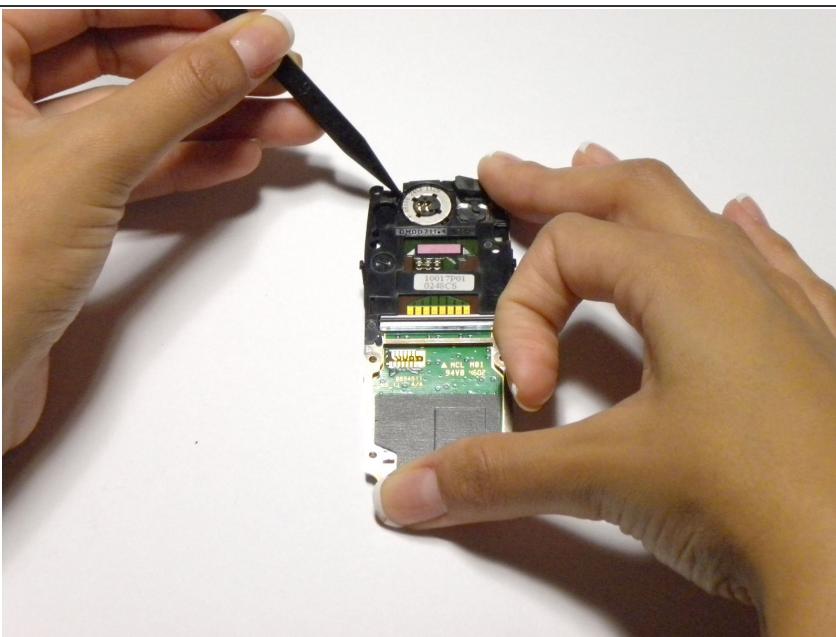

Step 11

- Remove speaker.



To reassemble your device, follow these instructions in reverse order.