



Nokia 8 Sirocco Teardown

Teardown guide for Nokia 8 Sirocco.

Written By: Mobile Partners



 **TOOLS:**

- [Essential Electronics Toolkit](#) (1)
- [Spudger](#) (1)
- [iOpener](#) (1)
- [SIM Card Eject Tool](#) (1)
- [Standoff Screwdriver for iPhones](#) (1)
- [Precision Utility Knife](#) (1)
- [iSlack](#) (1)

Step 1 — Back glass removal



- Start by heating up the back glass. Ifixit's iOpener kit is very useful here. You can also use heating pad or heat gun
- Take off the SIM tray, and start there. Use suction cup if available
- After you have made room for plastic card, finish the work by going around the glass with card

Step 2 — Midframe




- Start by screwing off all screws. There are 3 type of different screws.
 - 11 pcs of longer black painted screws
 - 10 pcs of shorter black painted screws
 - 1 shiny metallic screw
- After that, pop off bottom piece and then midframe

Step 3 — Battery





- Remember to disconnect battery connector first
- Battery has pull tabs, so you should try this first
- If pull tab breaks, you have to commit a *pry of shame*

Step 4 — Daughter board

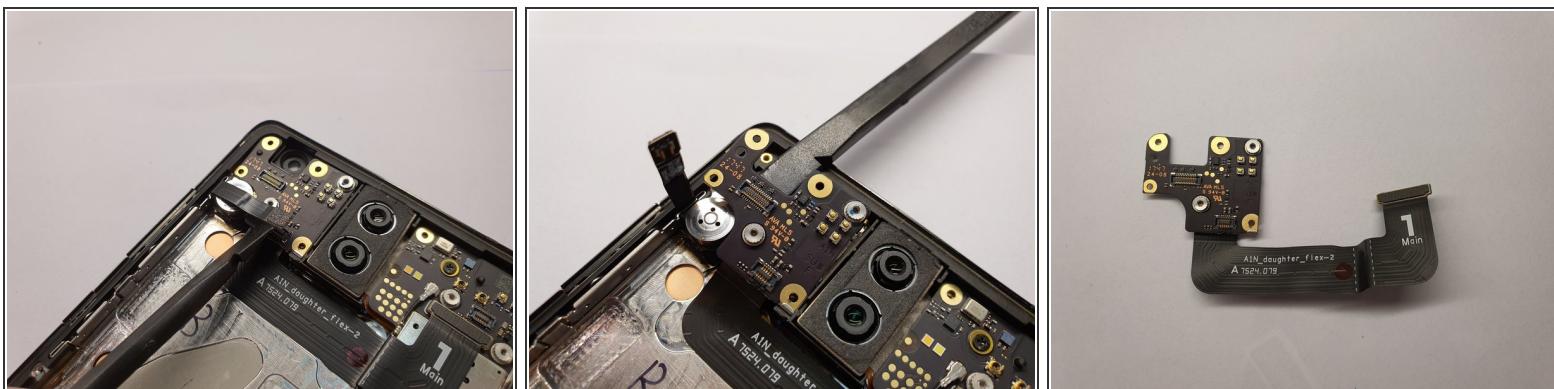


- Disconnect volume and power button connector
- Disconnect connector on motherboard
- Pry off the daughter board

Step 5 — Motherboard

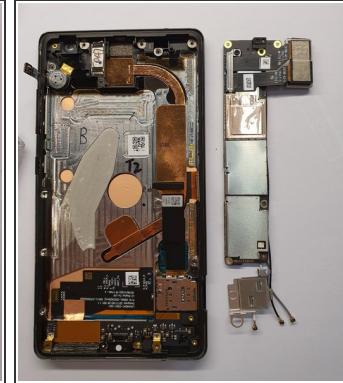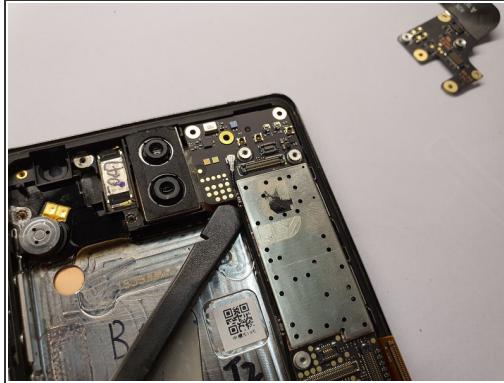

- There are 2 screws
 - 1 longer black screw
 - 1 standoff screw
- After taking the screws off, you can disconnect antenna coaxial cables
- Now you can take motherboard off
- Make sure to push SIM-eject pin out first

Step 6 — Charging board

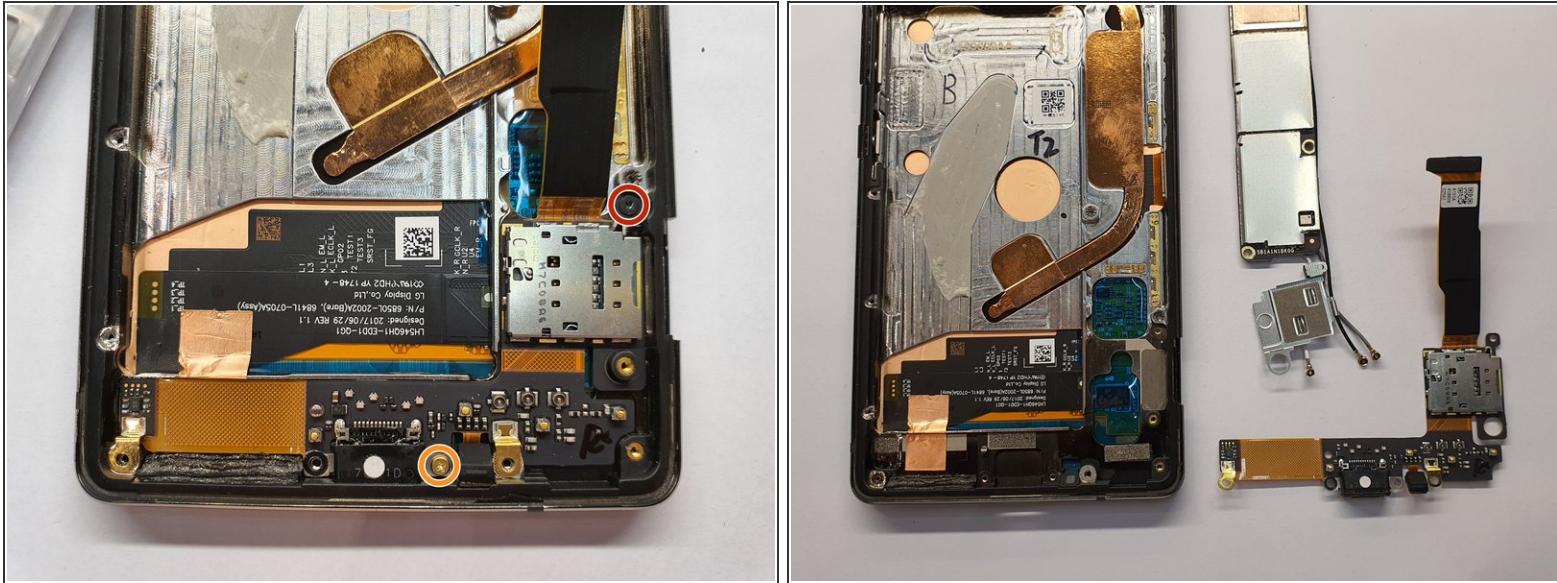

- Charging board is held down with 2 screws
 - 1 black screw
 - 1 golden screw
- After taking the screws off, charging board is free
- And now you are done, repeat steps backward to put everything back together