



Nokia 8260 Microphone Replacement

Written By: Aaron Jen



INTRODUCTION

How to remove the microphone.

TOOLS:

- [Spudger \(1\)](#)
- [T6 Torx Screwdriver \(1\)](#)

Step 1 — Battery



- Turn off the cell phone.

Step 2



- Press down on the round button on the back cover of the phone.

Step 3



- Slide the back cover down while still pressing the button.

Step 4



- Remove the back cover.

Step 5



- Press the end of the battery towards the top of the phone.

Step 6



- Lift the battery outwards while still pressing it upwards till it pops out.
- You may need to take several attempts to lift out the battery.

Step 7 — Antenna



- Squeeze the flat end of the spudger into the crack right under the word "Nokia" on the back of the phone.
- *(i)* This step may be a bit difficult if you are removing the antenna for the first time.

Step 8



- Pry open the antenna door by pulling down the top of the spudger

Step 9



- Remove the antenna door.

Step 10



- If the gold antenna remained stuck to the door, you have finished removing the antenna from the phone.
- If the gold antenna is still in the phone, carefully remove it and stick it onto the back of the door.

⚠ Try to keep the antenna as flat as possible. Do not bend it.

Step 11 — Circuit Board



- Remove the five screws with the Torx Screwdriver: two near the bottom, two in the middle, and one under the antenna door.
- *i* The two bottom screws are longer than the upper three.

Step 12



- Remove the back covering.

Step 13



- Remove the two screws at the top.

Step 14




- Remove the metal plating and the circuit board.

⚠ There is nothing holding the rest of the phone together. Handle the rest of the phone carefully.

ⓘ The LCD will be attached to the circuit board.

Step 15 — Keypad

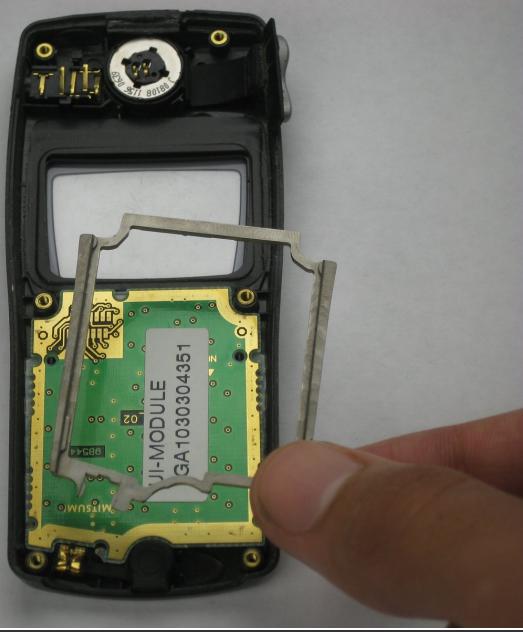

- Remove the plastic border lying on the keypad.

Step 16



- Remove the keypad.

(i) Depending on what you are doing, you can take out or leave the buttons to the keypad in the front casing.

Step 17 — Microphone



- Remove the microphone.

To reassemble your device, follow these instructions in reverse order.