



# Nokia E62 Complete Disassembly

How to completely take apart a Nokia E62.

Written By: Jose Gustavo Abreu Murta



 **TOOLS:**

- [Metal Spudger \(1\)](#)
- [T6 Torx Screwdriver \(1\)](#)

## Step 1 — Nokia E62 Complete Disassembly



- To start, press one of the latches at the top of the phone to open the rear cover.

## Step 2



- Carefully press the other latch.

## Step 3



- Open rear cover by this side.

## Step 4




- Press the three latches to open this side of the cover.

## Step 5




- Remove the rear cover.

## Step 6

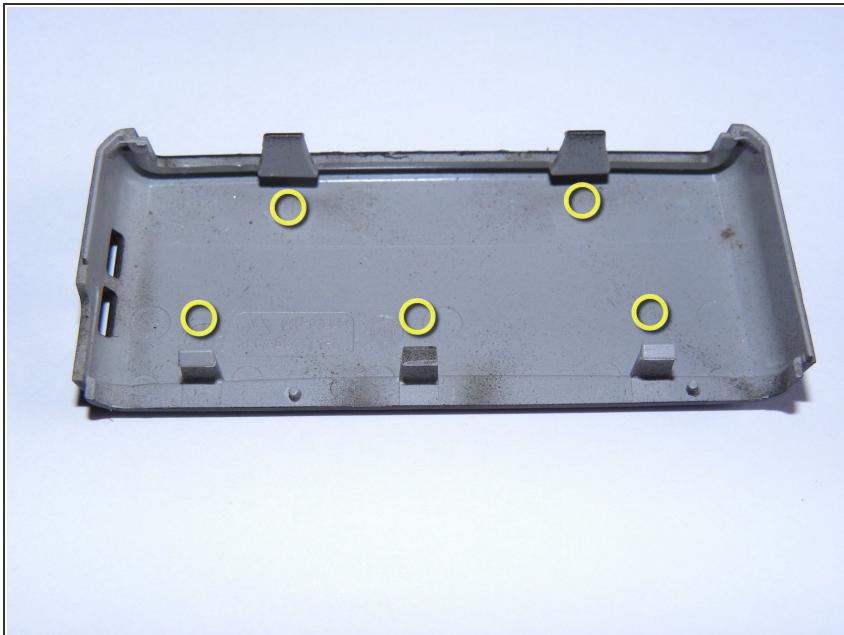


- Removed rear cover. See the latches .

## Step 7

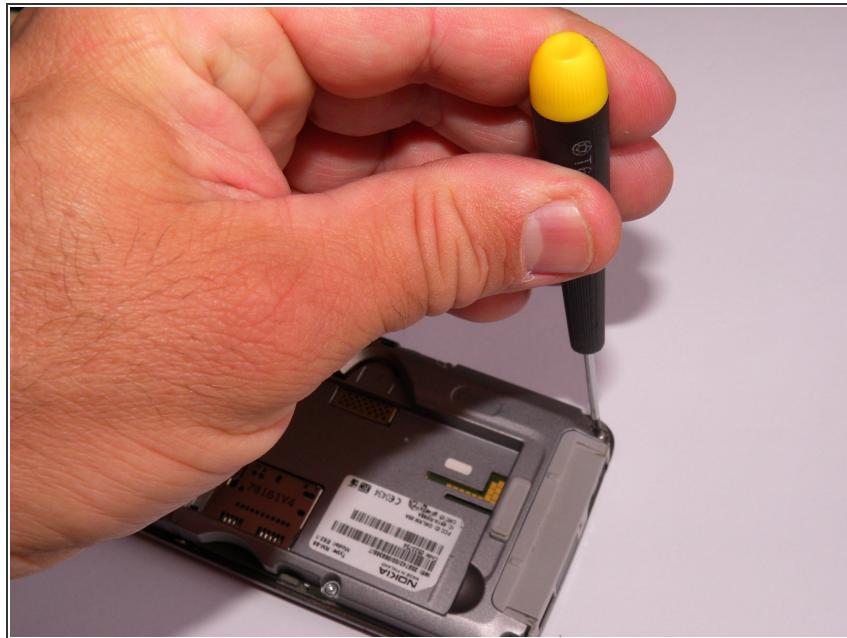


- Remove the screws using Torx T6 screw driver.

## Step 8

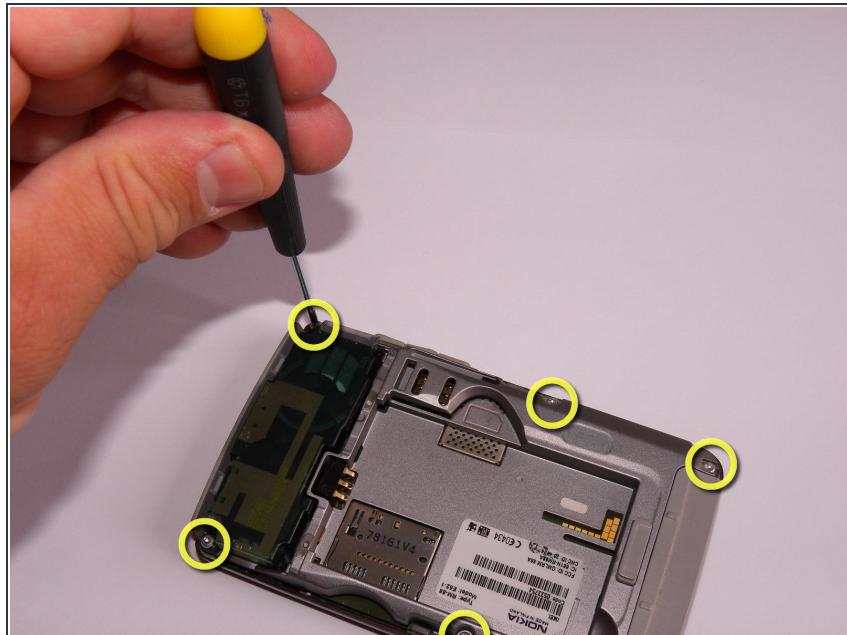


- Remove six T6 screws.

## Step 9

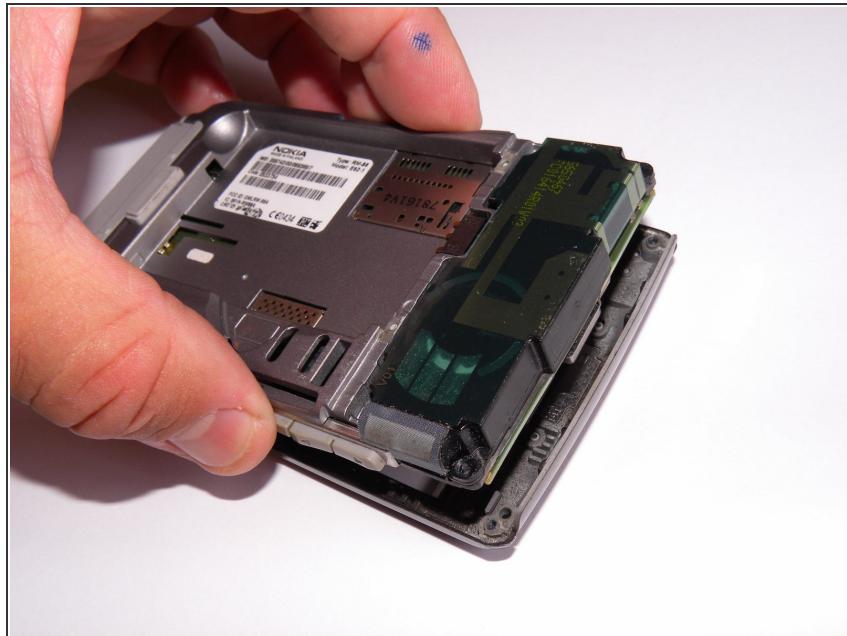


- Remove the assembly. The front cover will be released.

## Step 10

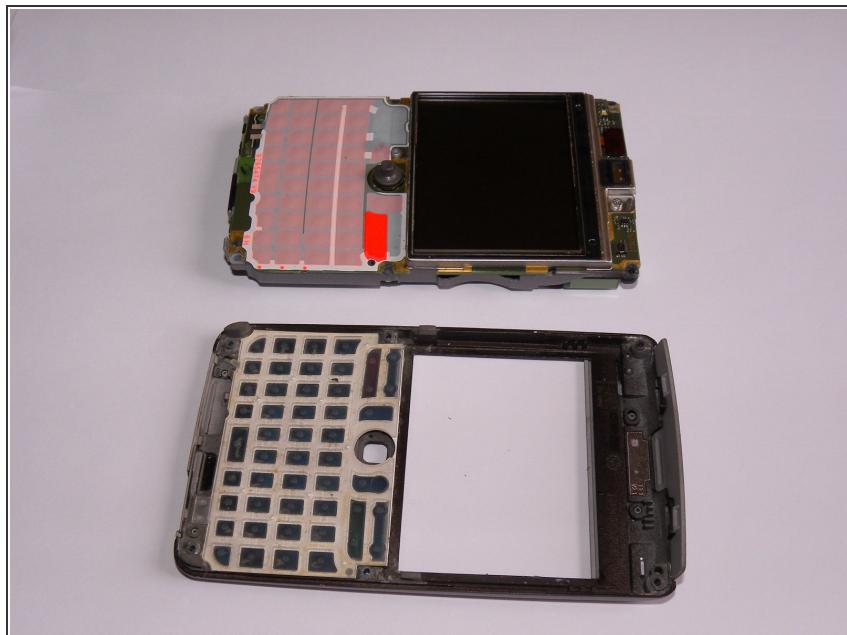


- The front cover released.

## Step 11

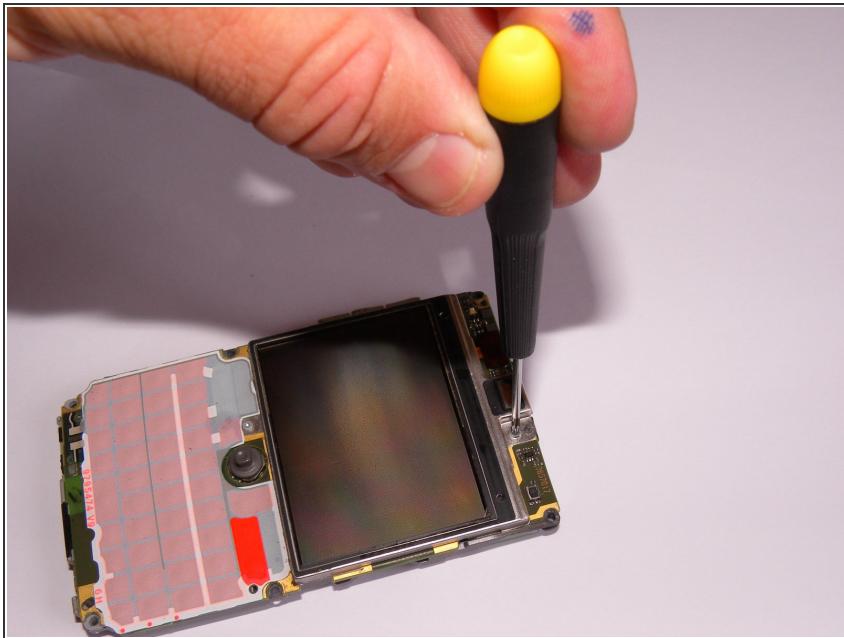

- To remove the display , unscrew the T6 Torx at top.

## Step 12

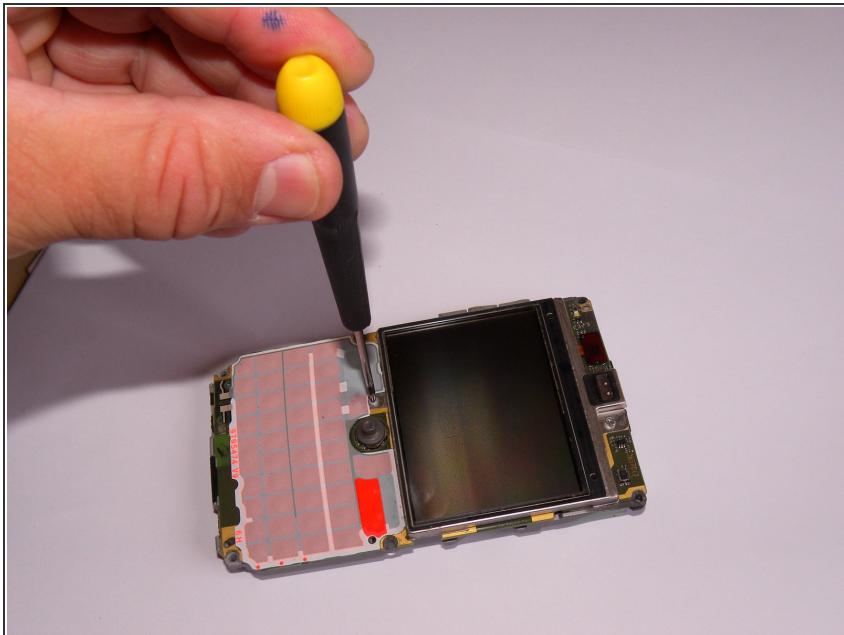


**⚠ CAUTION!** Remove the bottom screw with T5 Torx screw driver, not T6 !

## Step 13



- Carefully disconnect the Flex cable connector. Then remove the display.

## Step 14

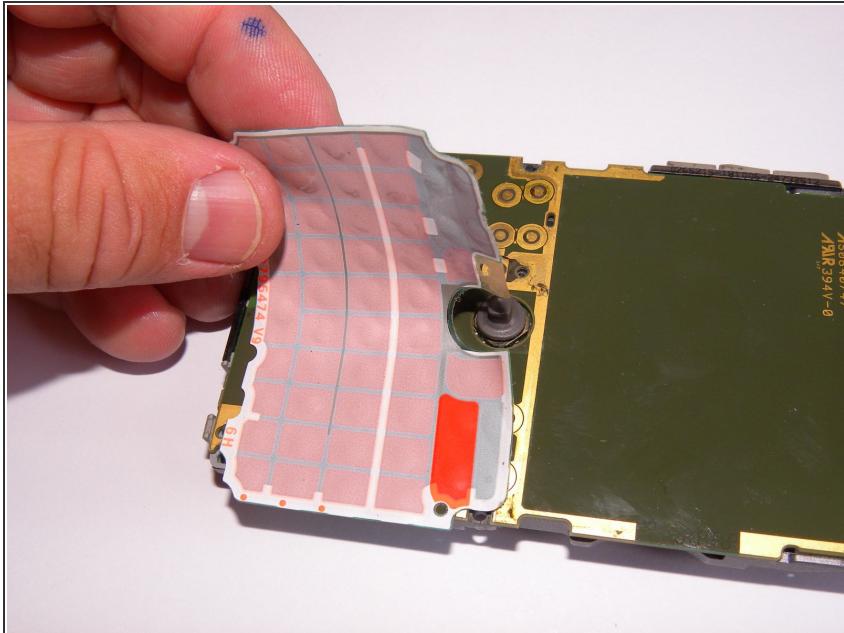

- Carefully remove the adhesive keyboard membrane.


**i** You can replace it at this step if you need to.

## Step 15



- You can clean the keyboard surface with alcohol, if you dropped a drink here.

## Step 16

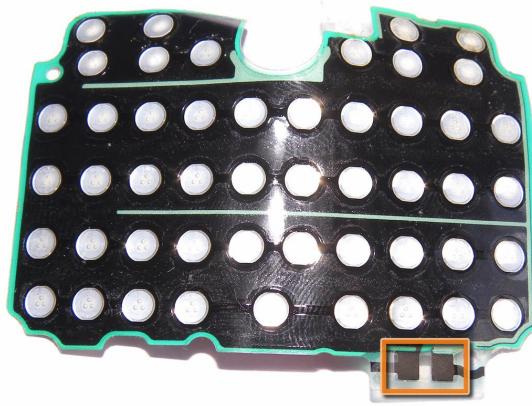

- When you replace the keyboard membrane, align the two contacts at bottom.

## Step 17




- You can wash the front cover and keyboard if they are dirty.

## Step 18




- Keyboard - clean it if necessary.

## Step 19

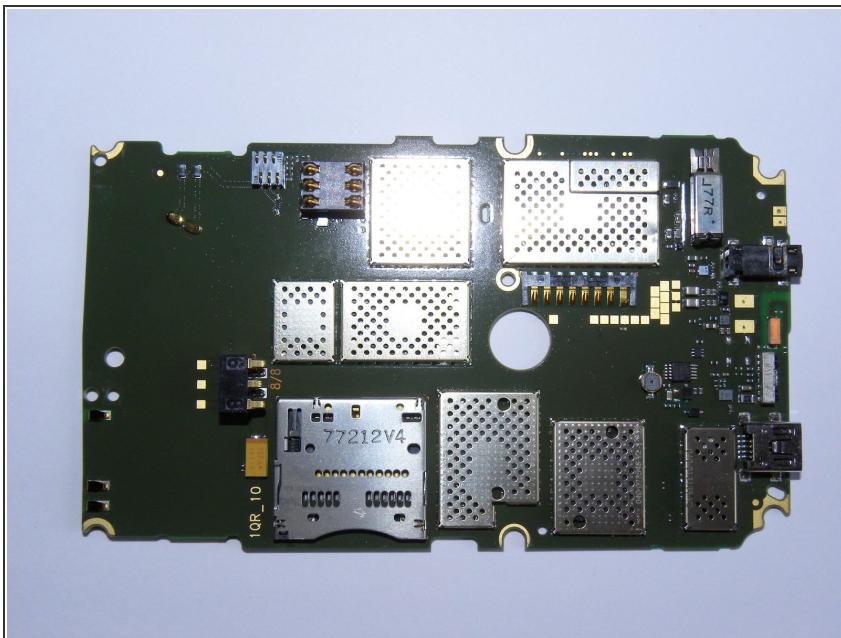


- Rear side of the circuit board.

## Step 20

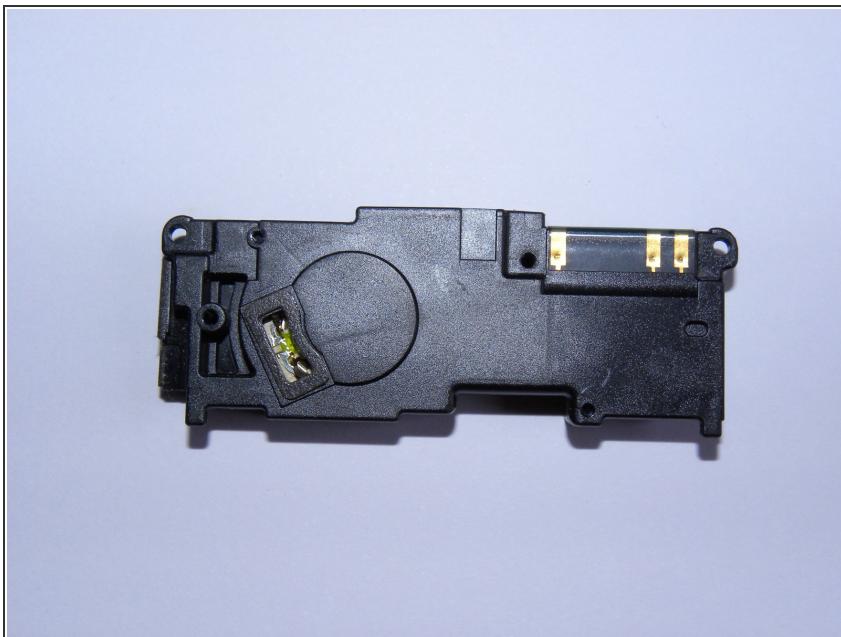

- Speaker and antenna contacts.

## Step 21

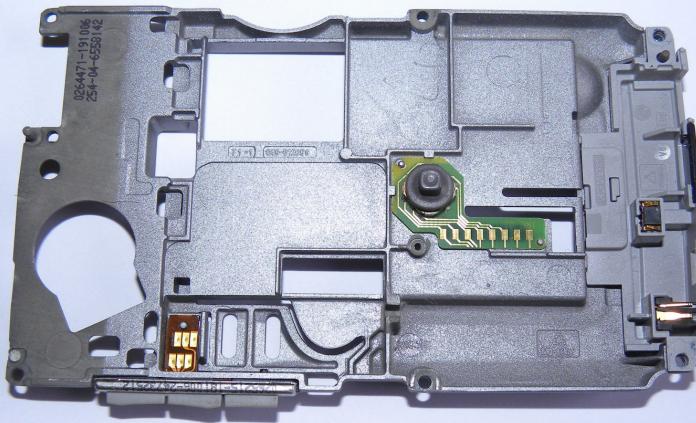

- If necessary, you can replace the joystick, the button module or the connector housing.

To reassemble your device, follow these instructions in reverse order.