



Nokia E90 Inside Screen Replacement

Written By: Cameron Weinberg



 **TOOLS:**

- [iFixit Opening Tools \(1\)](#)
- [T5 Torx Screwdriver \(1\)](#)

 **PARTS:**

- [Nokia E90 Inside LCD Screen \(1\)](#)

Step 1 — Front Cover




- Start with the phone in the flipped open position.
- You must remove the sticker in the center, below the screen to reveal the center screw.
- Use a T5 screwdriver to remove all three screws, loosening the front screen.

Step 2





- Flip the phone to the closed position and turn to the front screen.
- The front cover will now be loose enough for you to remove by grabbing the edges and lightly pulling the cover off.

Step 3 — Front Screen and Front Keypad

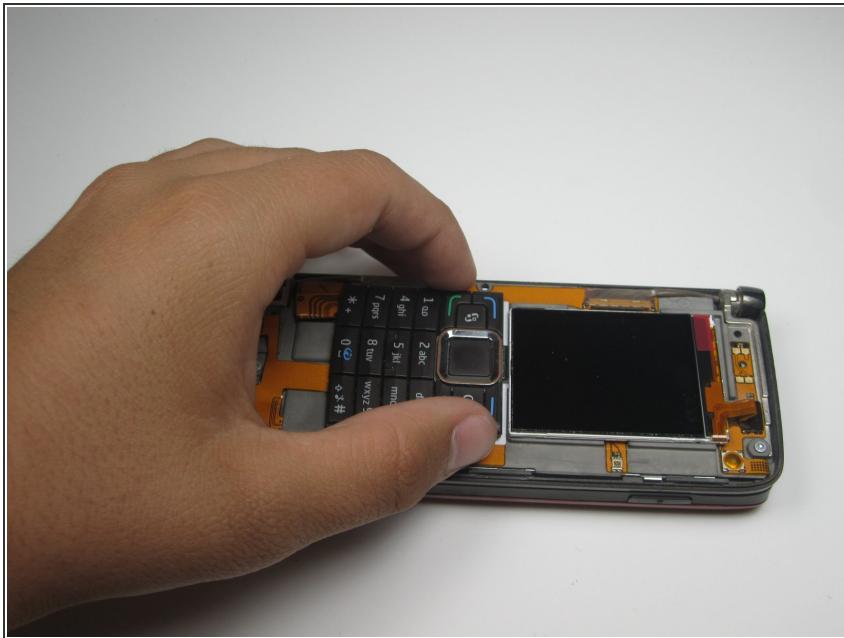

- With the front cover off, the screen and keypad should be loose.

Step 4

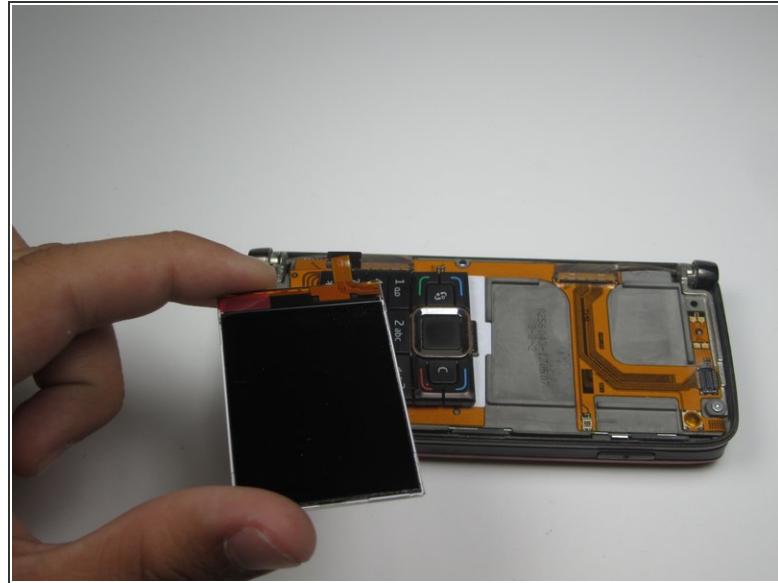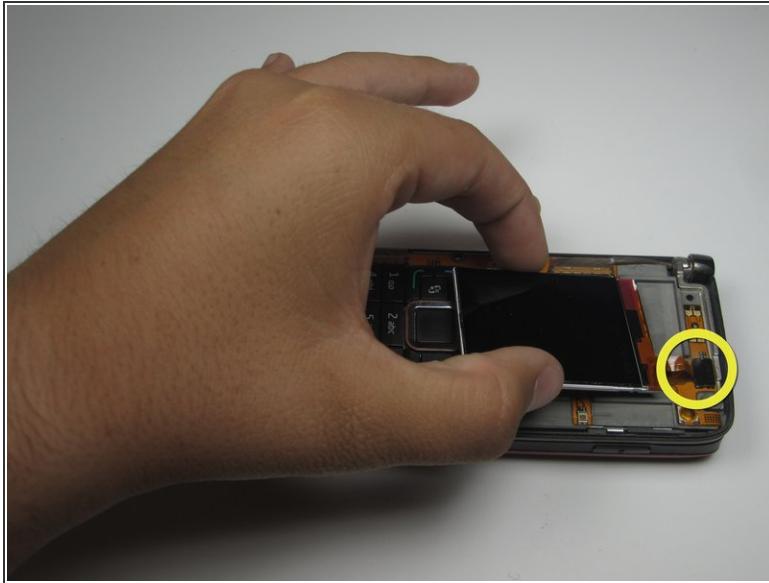

- Using a plastic opening tool pry up the cable connecting the LCD screen to the rest of the phone.
- With the cable disconnected, the screen should be free for removal or replacement.

Step 5 — Inside Screen



- After removing the front screen and front keypad, your device should look like this.

Step 6



- Using the T5 Screwdriver, remove the two screws shown.

Step 7



- Make sure to remove the connection shown by gently easing the plastic opening tool underneath the connection and lightly prying the connection apart.

Step 8



- Gently, lift the board up to reveal the front screen.

Step 9



- Using the plastic opening tool, lift and remove the inside screen.

In order to install a new screen, simply follow the steps in reverse order with the new screen.