



# Nokia Lumia 925 Display Replacement

How to replace a Nokia Lumia 925 display.

Written By: Guillermo Lara



 **TOOLS:**

- [T7 Torx Screwdriver \(1\)](#)
- [T5 Torx Screwdriver \(1\)](#)
- [iFixit Opening Tools \(1\)](#)
- [Tweezers \(1\)](#)


## Step 1 — Motherboard



- Remove the sim card holder by inserting tweezers into the hole. Push down and the holder will spring back up.
- Pull out the holder until it is completely separate.

**i** Something like a paperclip will work if there are no tweezers available.

## Step 2

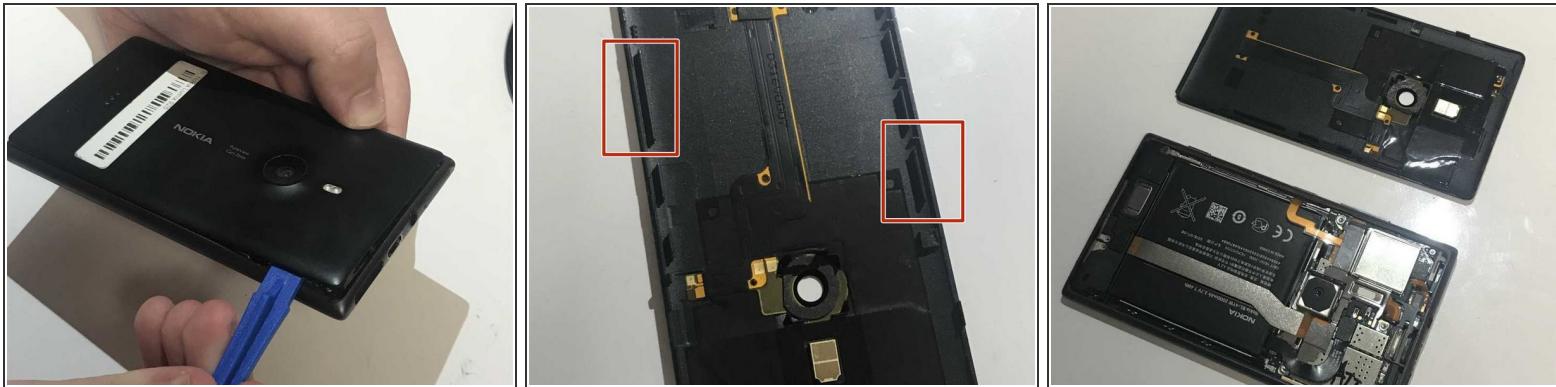

- Slide a plastic opening tool under the back cover.
- Slide the tool around the outsides of the cover to fully dislodge the pins holding the cover to the phone.


 Some pins are facing the opposite way from the others.

## Step 3



- Remove the 3 screws using the T7 Torx screwdriver.
- Unclip the black tab connector.

## Step 4

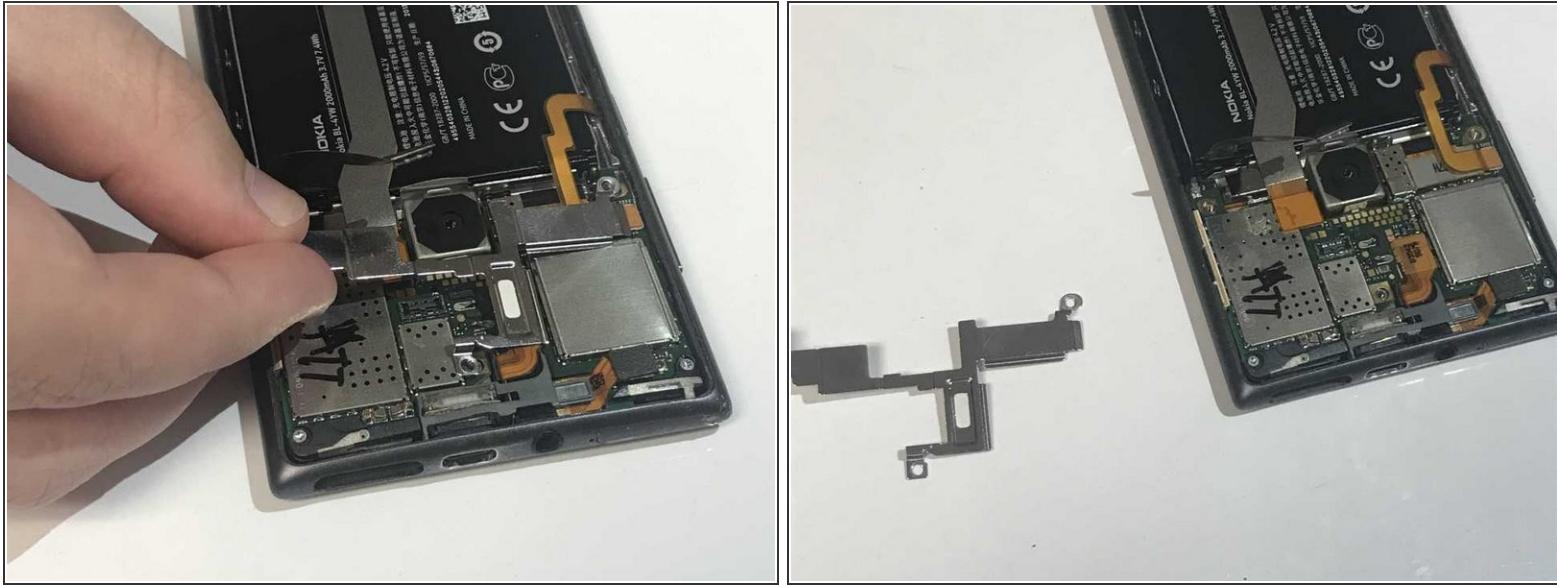


- Remove the silver metal cover.

## Step 5



- Unclip the two orange tabs.
- Remove the four silver screws using the T5 Torx screwdriver.

## Step 6

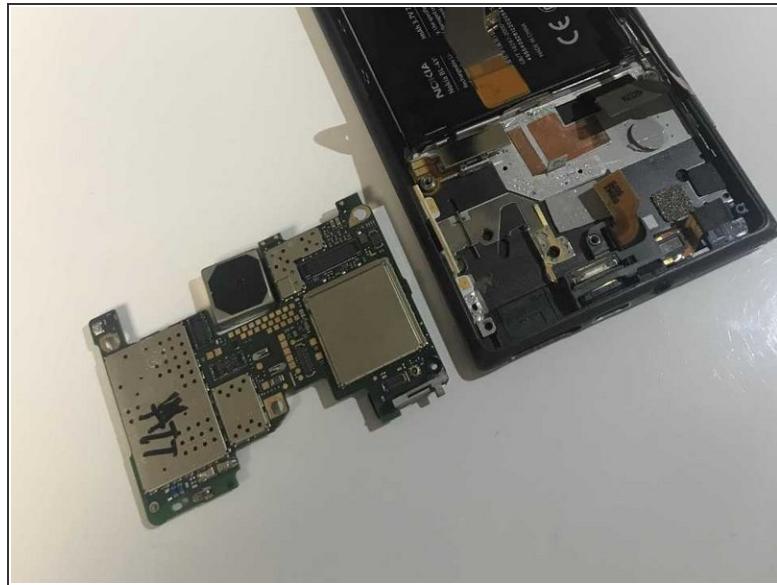

- Remove the motherboard by sliding tweezers between it and the back of the screen. Lift up.

## Step 7 — Display



- Push the screen from the inside of the phone.
- Pull the screen off.

ⓘ Slide the electronic strip through the small opening.

To reassemble your device, follow these instructions in reverse order.