




Nokia Lumia 925 Motherboard Replacement

How to replace a Nokia Lumia 925 motherboard.

Written By: Joseph McCoy

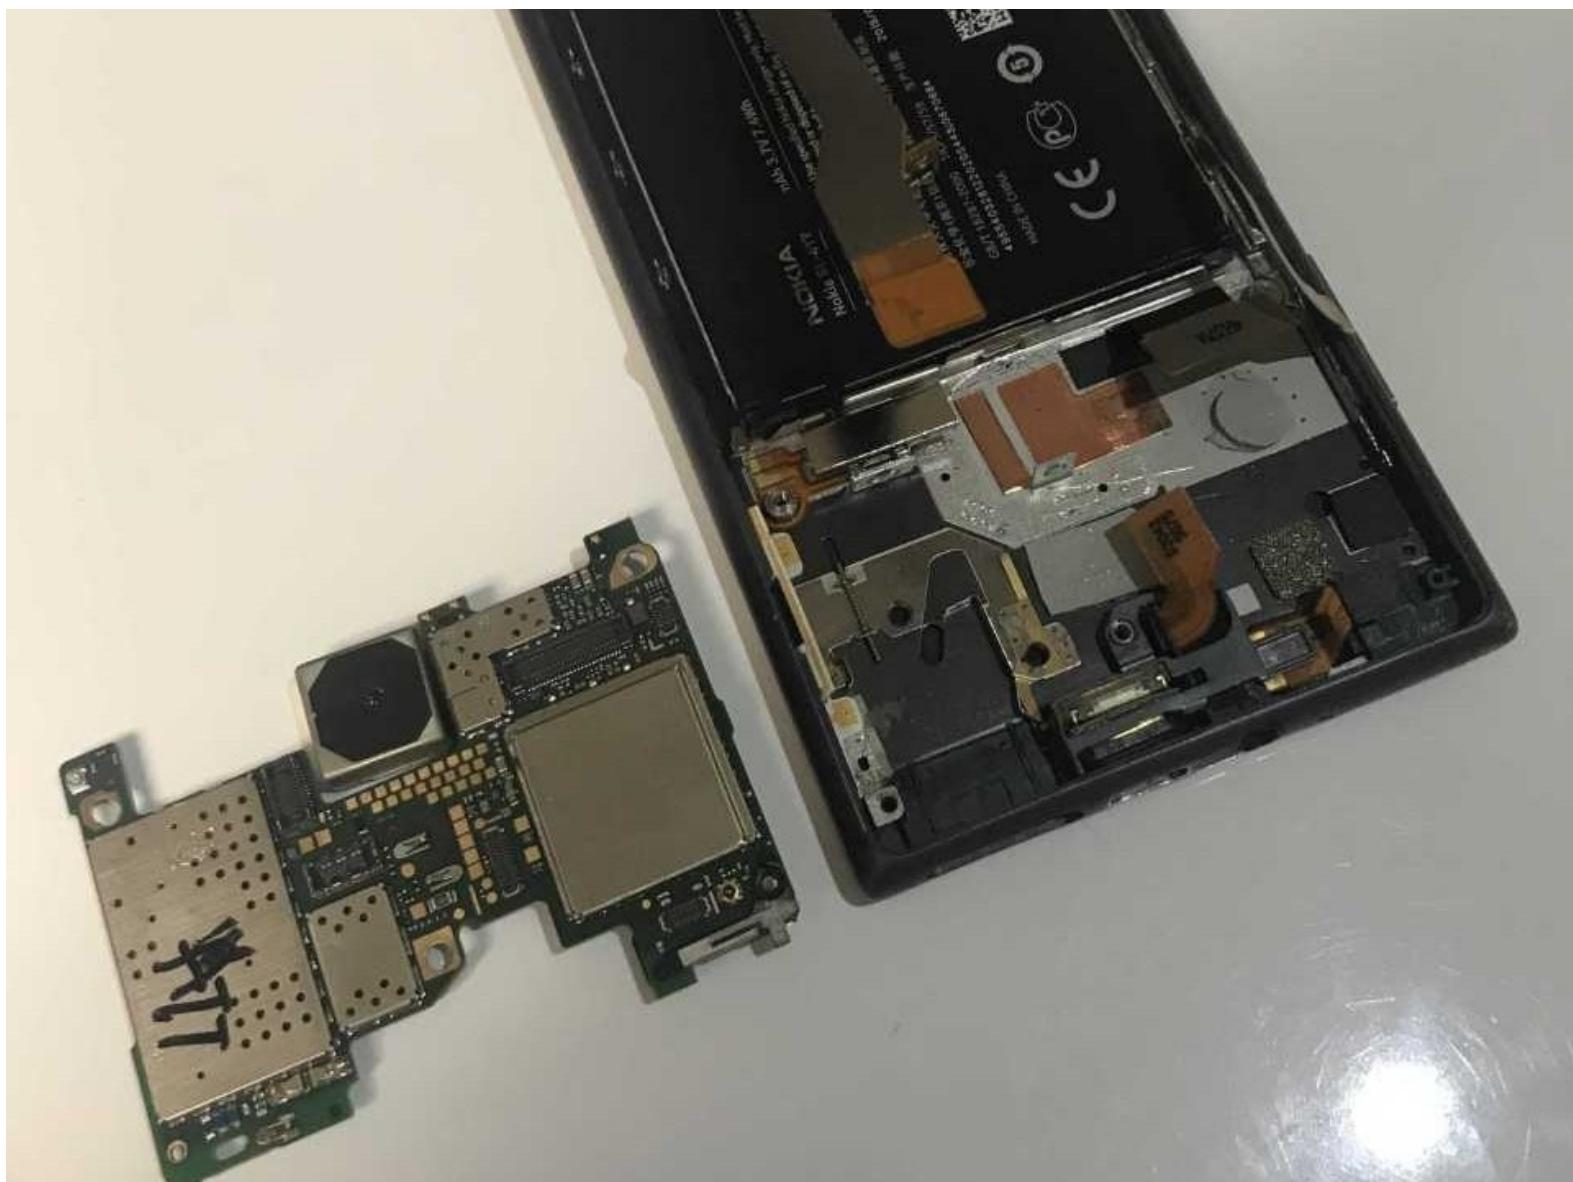

 **TOOLS:**

- [T7 Torx Screwdriver \(1\)](#)
- [T5 Torx Screwdriver \(1\)](#)
- [iFixit Opening Tools \(1\)](#)
- [Tweezers \(1\)](#)

 **PARTS:**

- [nokia lumia 925 motherboard \(1\)](#)


Step 1 — Motherboard



- Remove the sim card holder by inserting tweezers into the hole. Push down and the holder will spring back up.
- Pull out the holder until it is completely separate.

i Something like a paperclip will work if there are no tweezers available.

Step 2

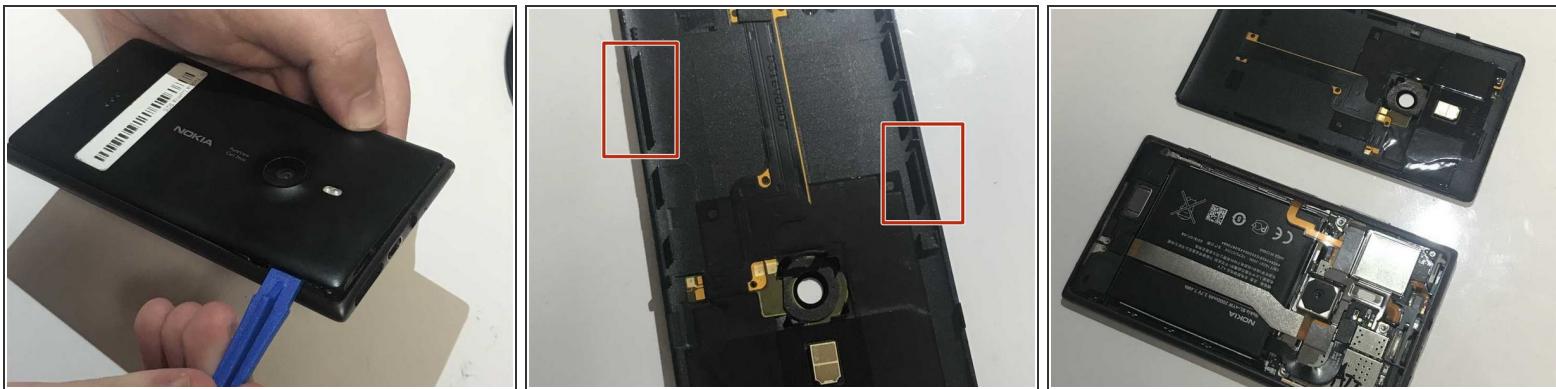

- Slide a plastic opening tool under the back cover.
- Slide the tool around the outsides of the cover to fully dislodge the pins holding the cover to the phone.


 Some pins are facing the opposite way from the others.

Step 3



- Remove the 3 screws using the T7 Torx screwdriver.
- Unclip the black tab connector.

Step 4

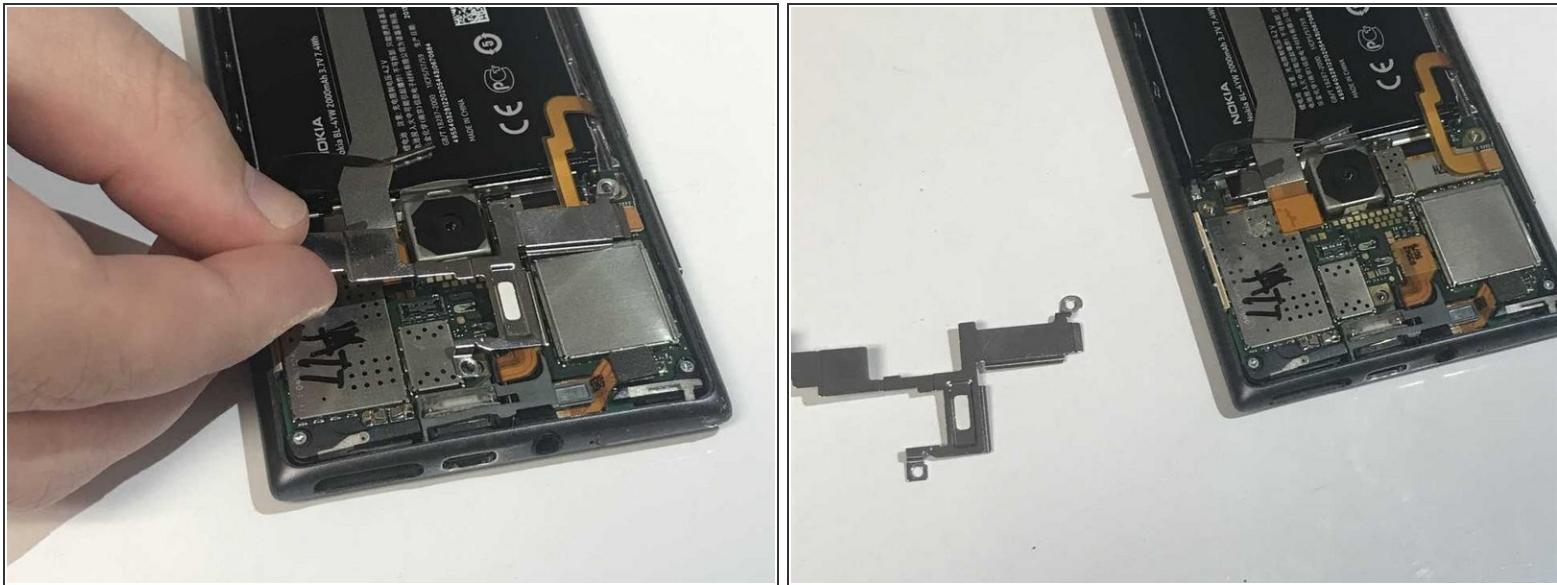


- Remove the silver metal cover.

Step 5



- Unclip the two orange tabs.
- Remove the four silver screws using the T5 Torx screwdriver.

Step 6

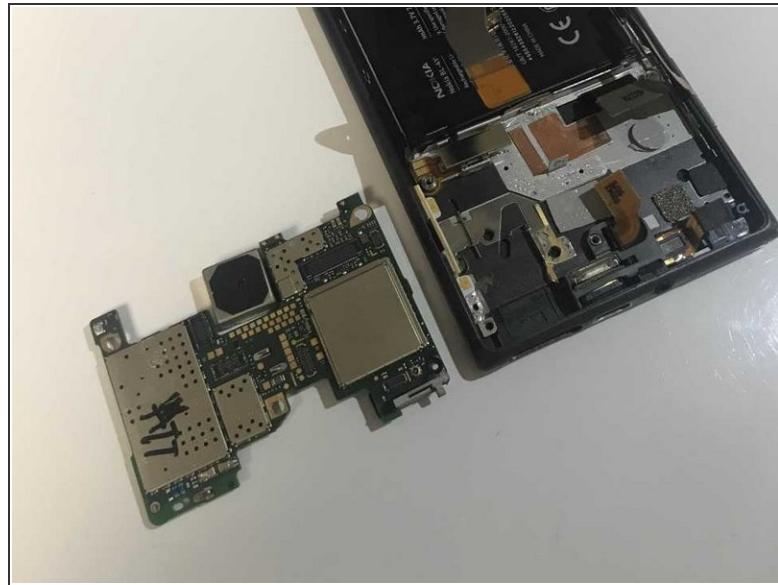

- Remove the motherboard by sliding tweezers between it and the back of the screen. Lift up.

To reassemble your device, follow these instructions in reverse order.