




Nokia Lumia 925 Speaker Replacement

This guide is to remove and replace a Nokia Lumia 925 speaker.

Written By: Guillermo Lara

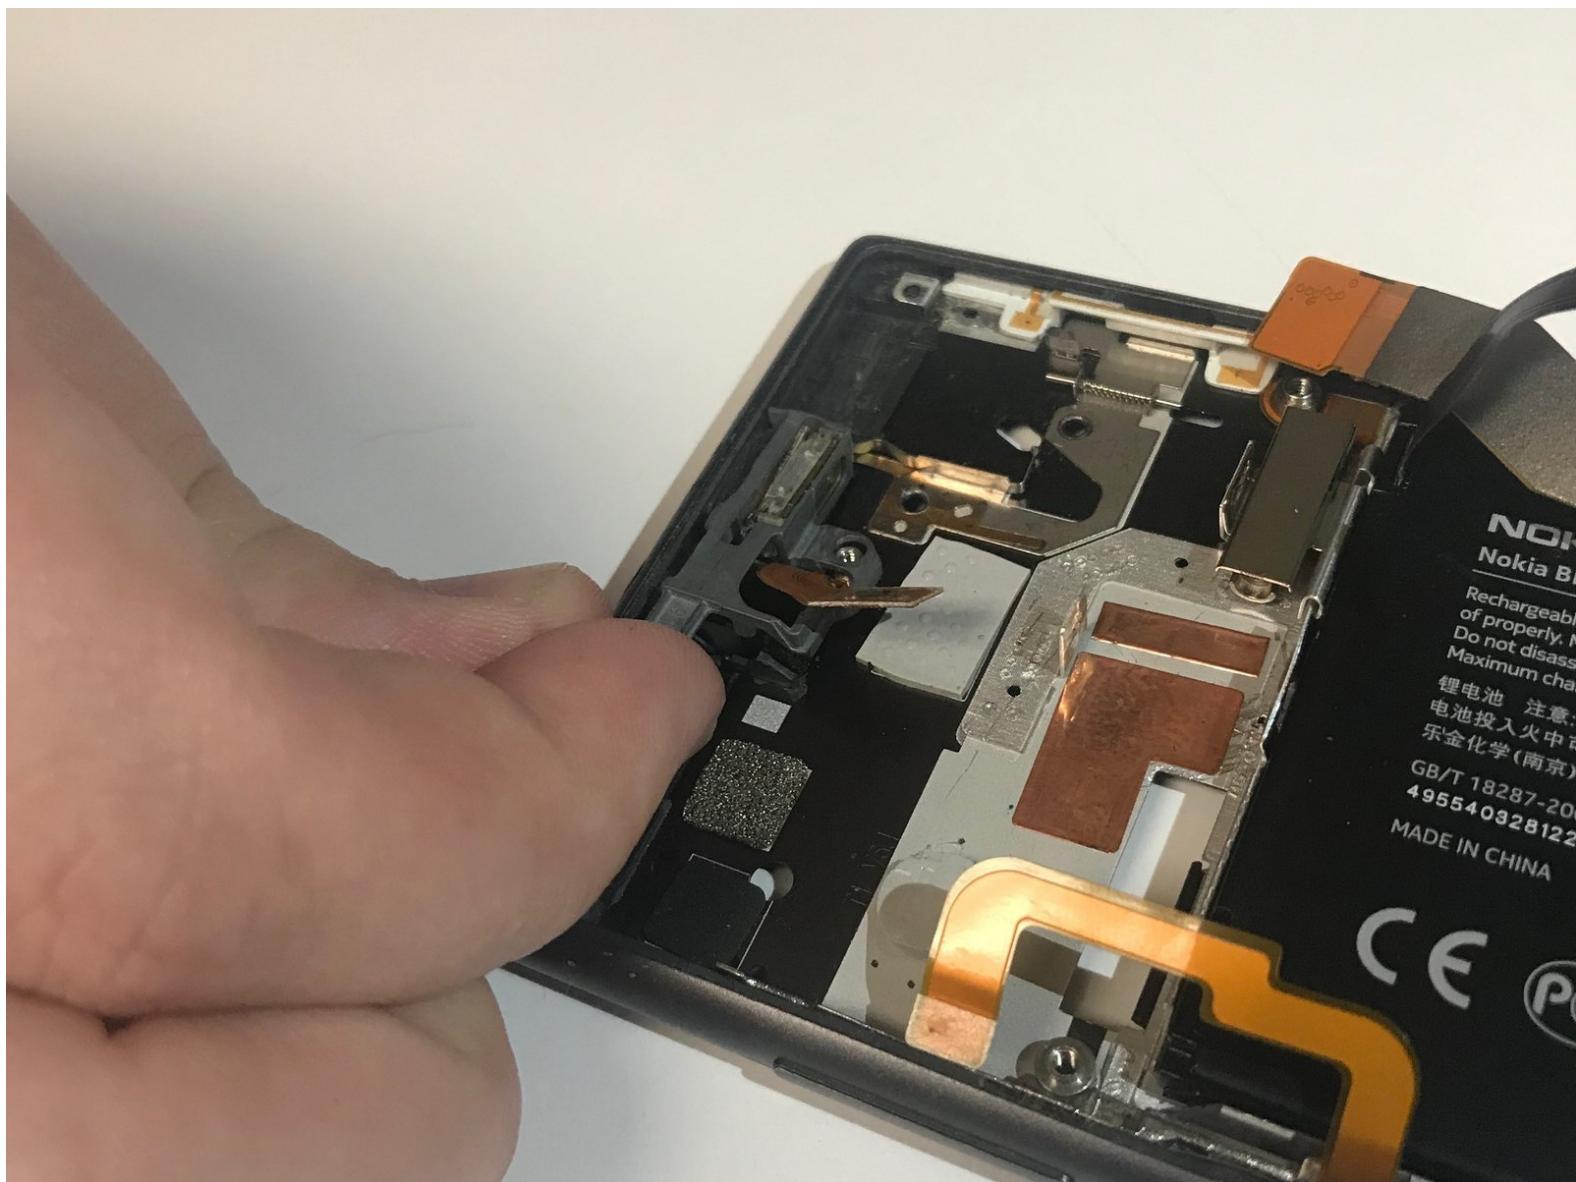

 **TOOLS:**

- [T7 Torx Screwdriver \(1\)](#)
- [T5 Torx Screwdriver \(1\)](#)
- [iFixit Opening Tools \(1\)](#)
- [Tweezers \(1\)](#)
- [ESD Safe Tweezers Blunt Nose \(1\)](#)


Step 1 — Motherboard



- Remove the sim card holder by inserting tweezers into the hole. Push down and the holder will spring back up.
- Pull out the holder until it is completely separate.

i Something like a paperclip will work if there are no tweezers available.

Step 2

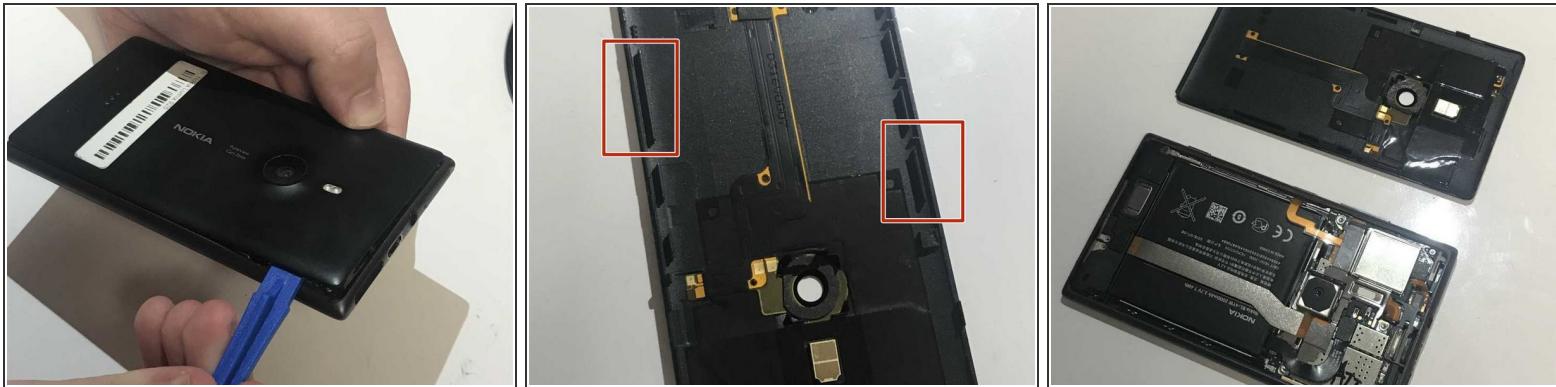

- Slide a plastic opening tool under the back cover.
- Slide the tool around the outsides of the cover to fully dislodge the pins holding the cover to the phone.


 Some pins are facing the opposite way from the others.

Step 3



- Remove the 3 screws using the T7 Torx screwdriver.
- Unclip the black tab connector.

Step 4

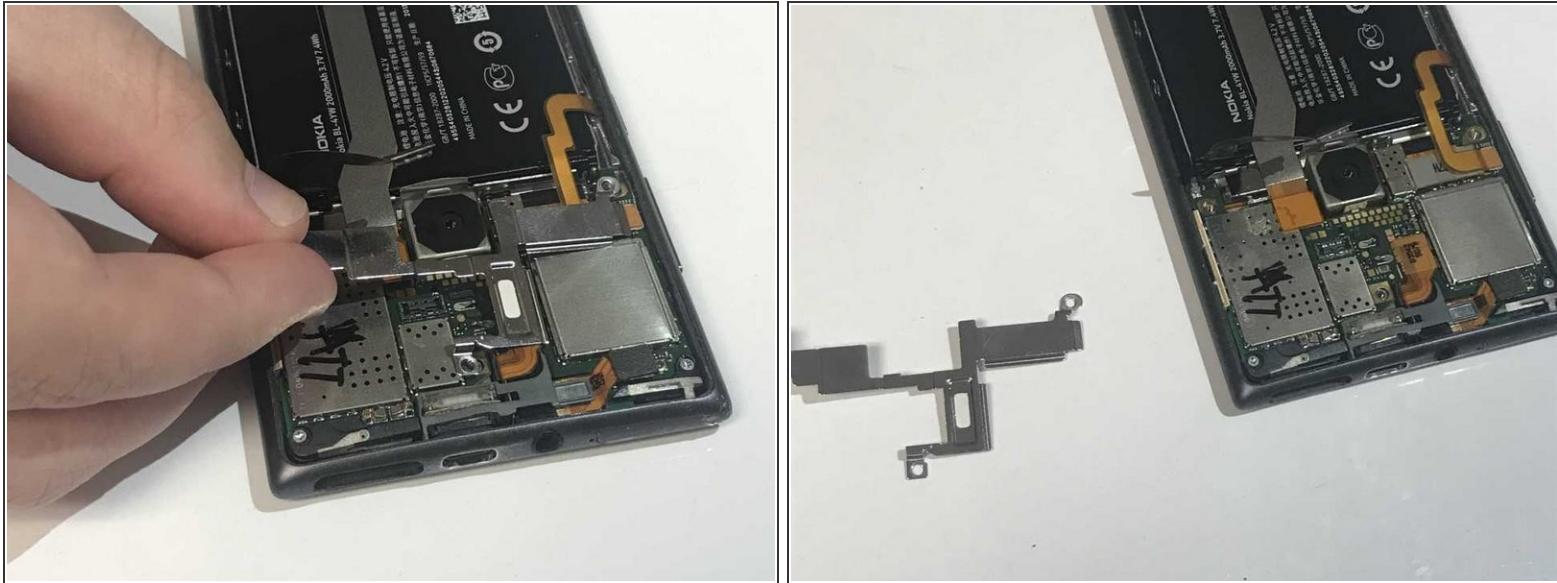


- Remove the silver metal cover.

Step 5



- Unclip the two orange tabs.
- Remove the four silver screws using the T5 Torx screwdriver.

Step 6

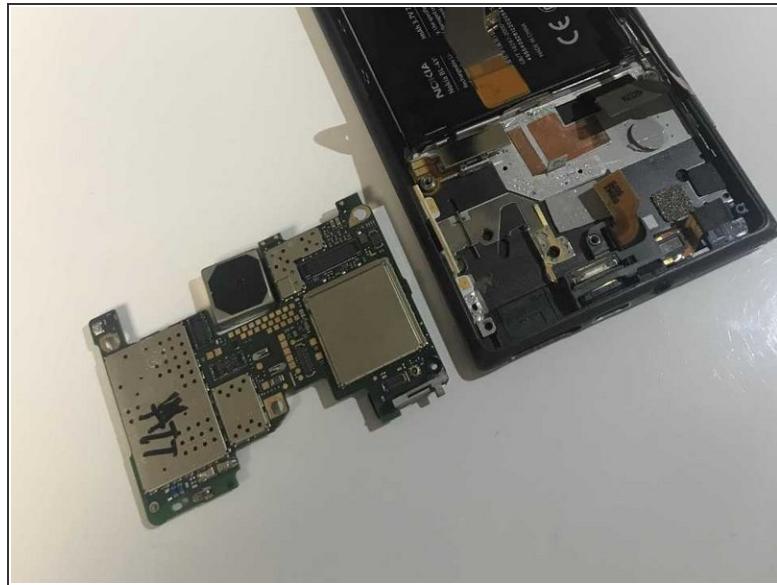

- Remove the motherboard by sliding tweezers between it and the back of the screen. Lift up.


Step 7 — Display



- Push the screen from the inside of the phone.
- Pull the screen off.

ⓘ Slide the electronic strip through the small opening.

Step 8 — Speaker

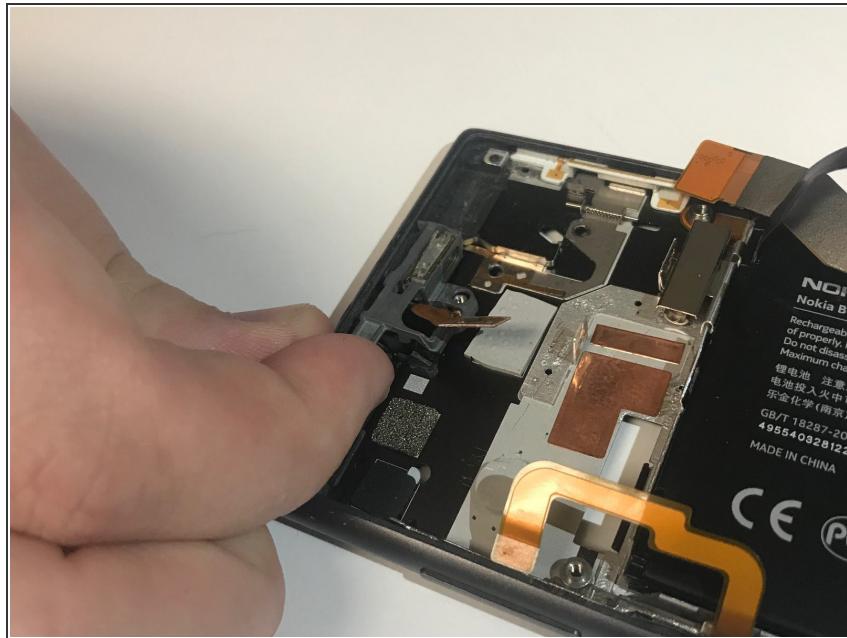

- Locate the grey speaker/camera cover.
- Carefully remove the cover with either a pair of tweezers or your fingers.

Step 9



- With a pair of tweezers, gently remove the orange colored tab closest to the speaker.

To reassemble your device, follow these instructions in reverse order.