



Nokia Lumia 930 Battery Replacement

Removing the back panel to replace the battery.

Written By: Brianna Rivera



INTRODUCTION

This guide will show you how to replace the battery on a Nokia Lumia 930 smartphone.

TOOLS:


- [Tweezers \(1\)](#)
- [Spudger \(1\)](#)
- [iFixit Opening Tools \(1\)](#)
- [T4 Torx Screwdriver \(1\)](#)

Step 1 — Battery




- Pull the sim card holder and the sim card out of the top of the phone using your fingernail.

Step 2

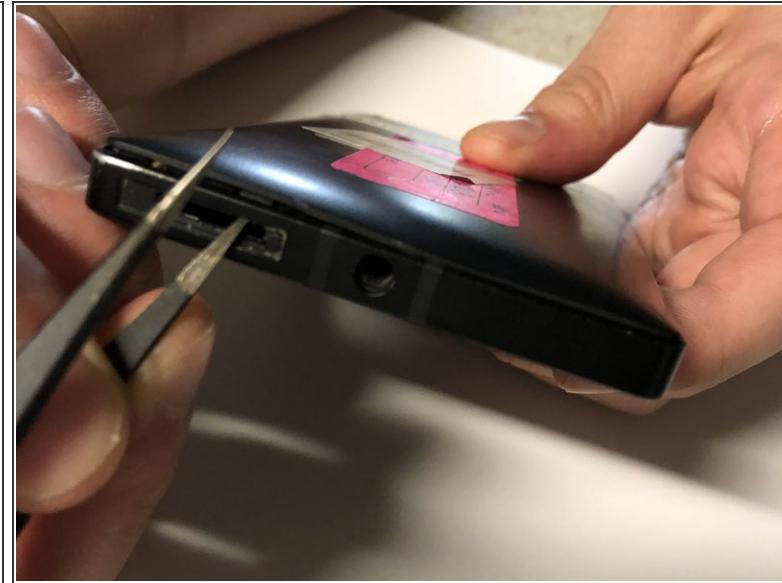


- Place the tweezers in the sim card hole and upwards until the back panel pops out.

Step 3

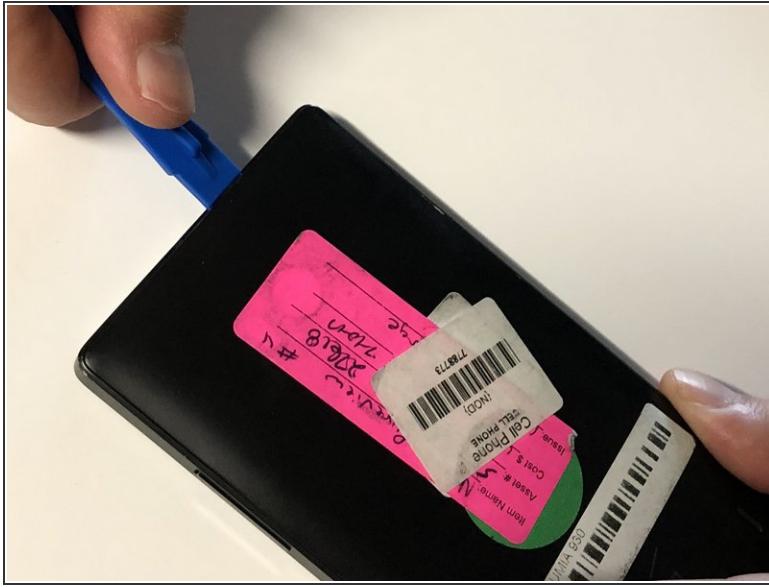

- Wedge a plastic opening tool into the opening made in the previous step. Slide it along the edges to completely remove the back panel from the phone's frame.

Step 4

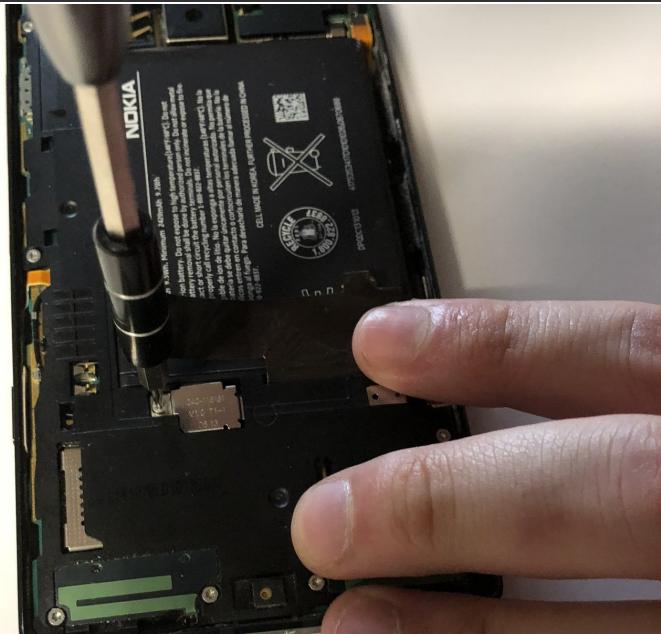


- Remove the single 4mm Torx #4 screw that's securing the battery strap to the phone.

Step 5



- Use the tweezers to remove the battery connector strap.

Step 6

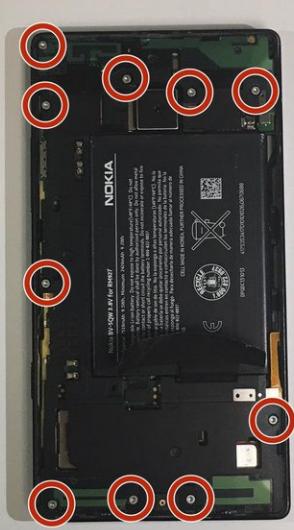


- Remove the ten 4mm Torx #4 screws that secure the battery cover to the frame of the phone.

Step 7



- Use the flat end of the spudger to pry the battery cover apart from the phone frame.

Step 8

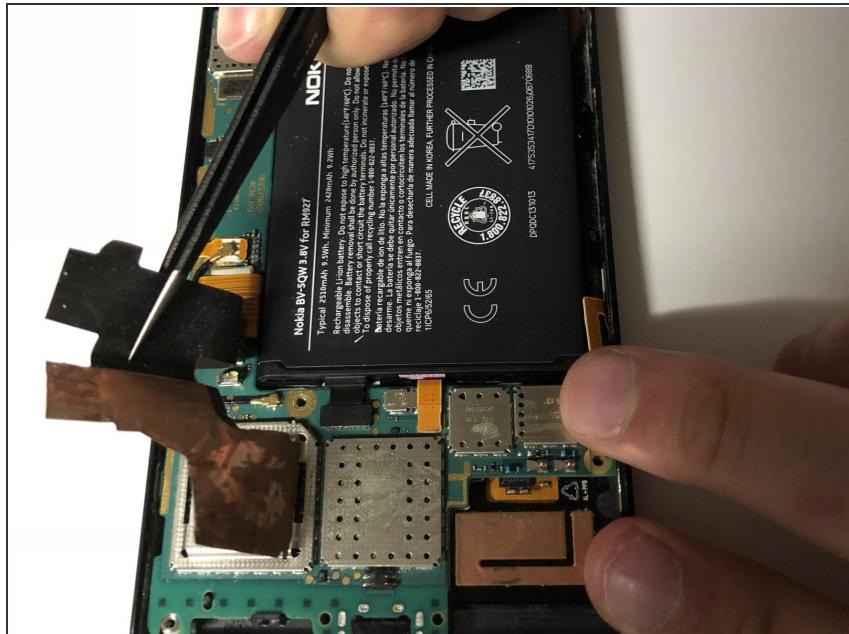

- Pull up on the heat spreader, being careful not to tear it.

Step 9




- Use the flat end of the spudger to lift up the battery.

i The battery is glued in place so pry carefully to not damage it.

! Two flex cables are directly underneath the battery.

Step 10

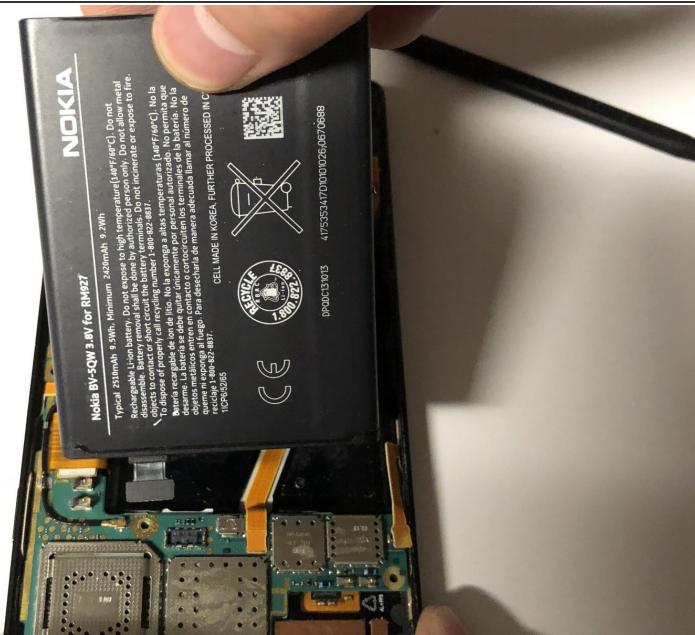

- Pull up to remove the battery from the phone.

To reassemble your device, follow these instructions in reverse order.