




Nvidia Shield Controller Buttons Replacement

This will be a step-by-step guide to take out and replace the controller buttons.

Written By: Daniel Eberhart

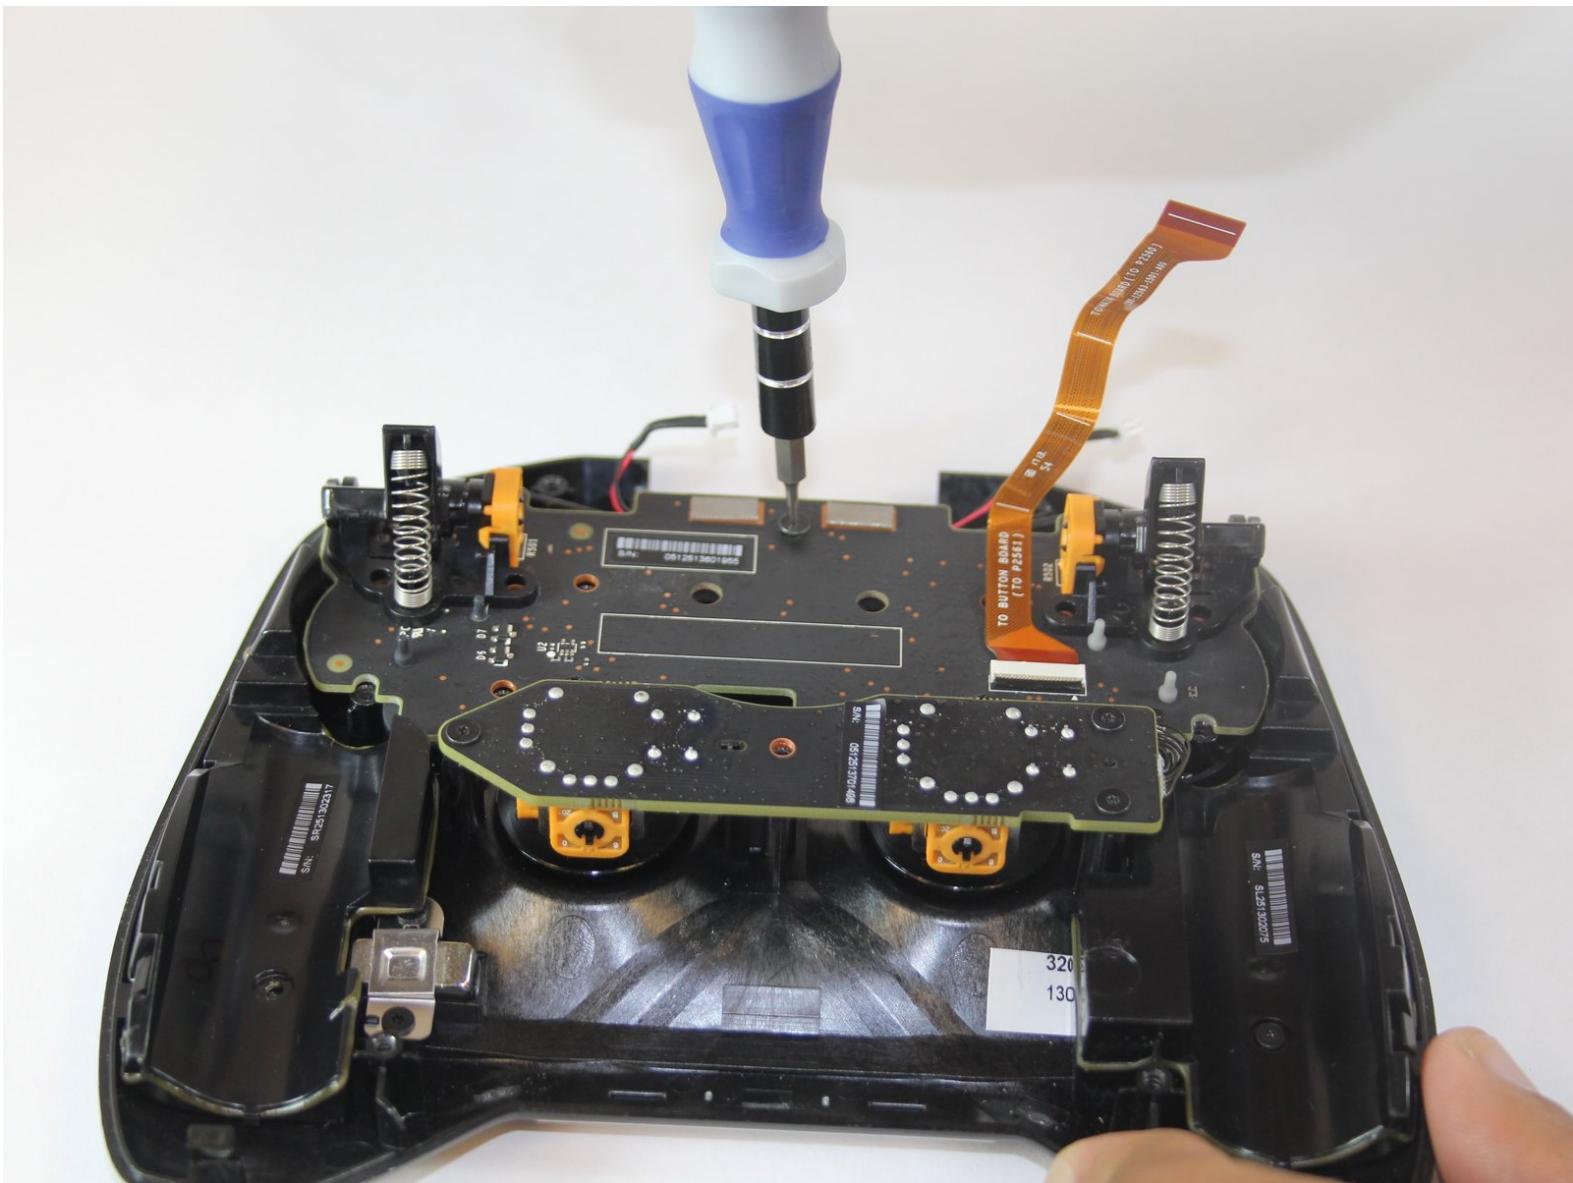

 **TOOLS:**


- [T5 Torx Screwdriver \(1\)](#)
- [Spudger \(1\)](#)
- [Tweezers \(1\)](#)

Step 1 — Remove Front Panel



- Unscrew the 7 6.4mm T5 Torx screws from back panel
- Use spudger to separate front and back panels

Step 2 — Remove Green Grill

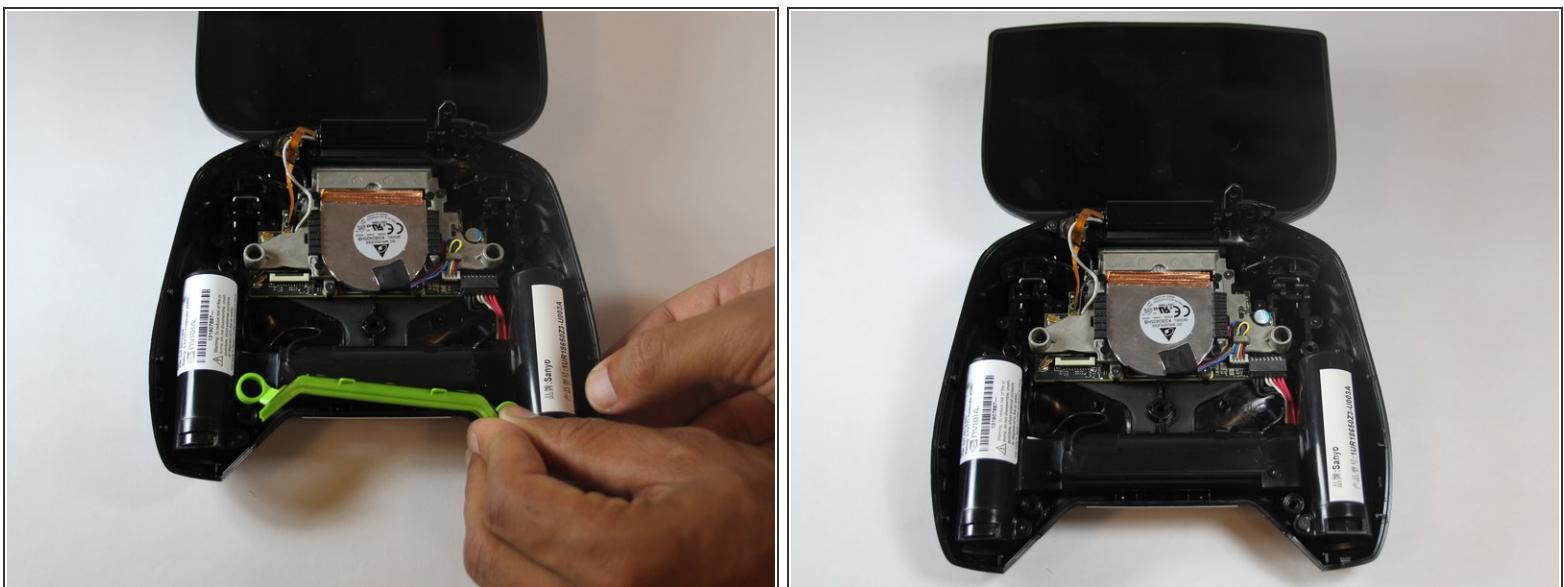

- The green grill is not screwed in so it can be pulled right out.

Step 3 — Remove Battery Cables




- Remove the 6 6.5mm T5 Torx screws.
- Remove power wires.
- Peel back copper tape and remove black and white wires.

Step 4 — Remove Battery Apparatus



- Once all cables are removed, pull the battery apparatus out.

Step 5 — Removing Button Board

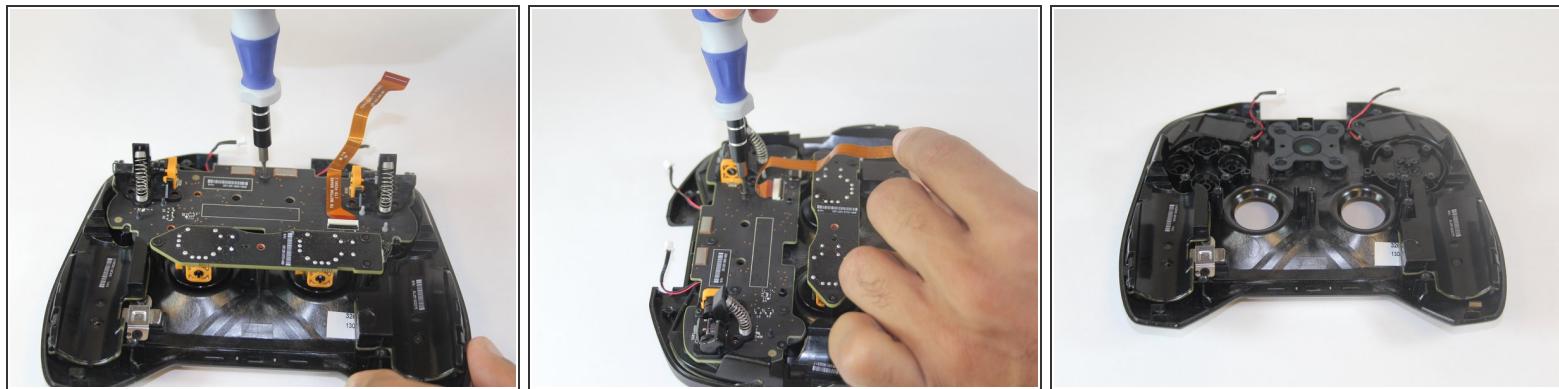

- Once the front panel has been removed, you are able to access the button board, containing seven 6.5mm T5 torx screws.
- The 7th screw is located under orange ribbon.
- Once the screws are removed, the button board is able to be lifted out, allowing for access to replace buttons.

To reassemble your device, follow these instructions in reverse order.