



# OPPO N1 Screen Replacement

This guide is designed to replace a damaged screen.

Written By: Joshua Stone




## INTRODUCTION

After completing the prerequisite guides we will be showing you the step by step process of removing & or disconnecting components of the screen.

### **TOOLS:**



- [iFixit Opening Tools](#) (1)
- [Phillips #0 Screwdriver](#) (1)
- [Tweezers](#) (1)

## Step 1 — Rear Case

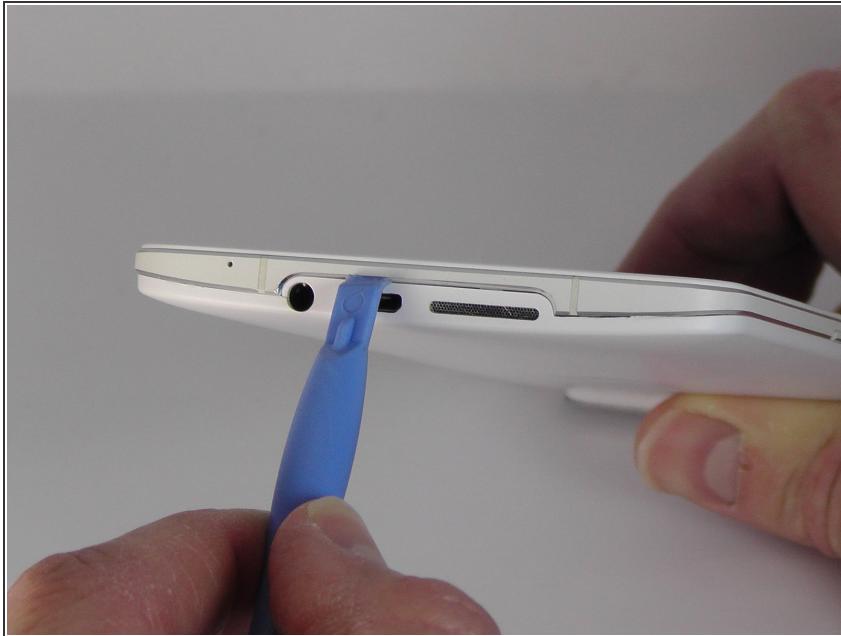

- Insert the plastic opening tool into the crevice. The back cover is most easily opened by starting at this location.

## Step 2

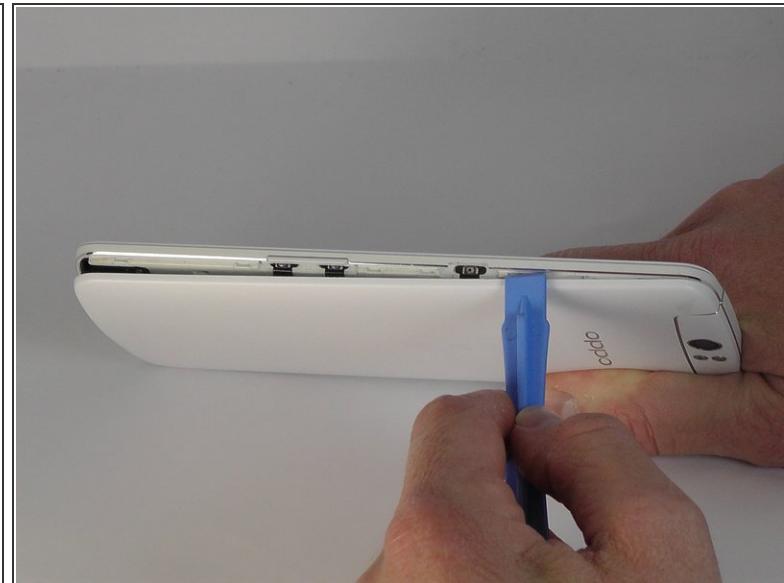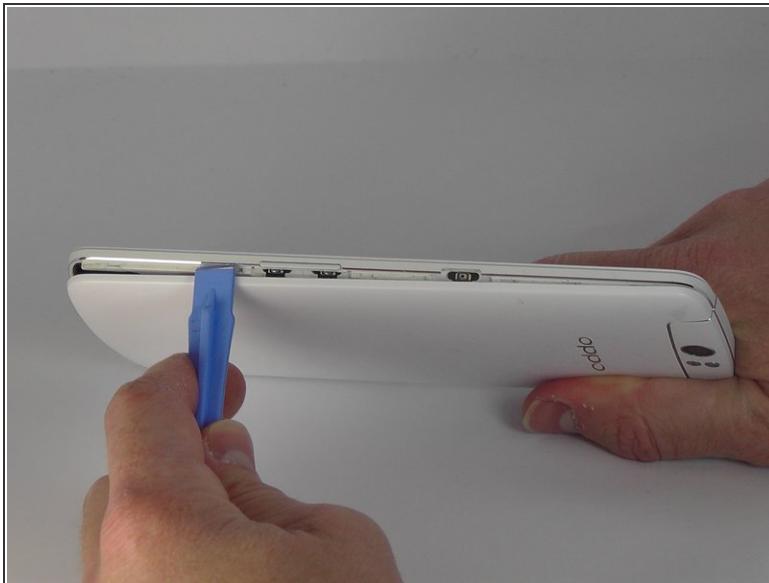

- In the photo we rotated the phone ninety degrees counterclockwise.
- Gently slide the plastic opening tool around the edge of the phone to release the back cover from the phone. You may hear some snapping noises as you release the back cover.
- The rear case should then come free.


This document was generated on 2019-09-23 02:36:17 PM (MST).

## Step 3 — Battery



- Remove the six 4mm long screws holding the motherboard in with the ph0 Phillips head screw driver.

## Step 4

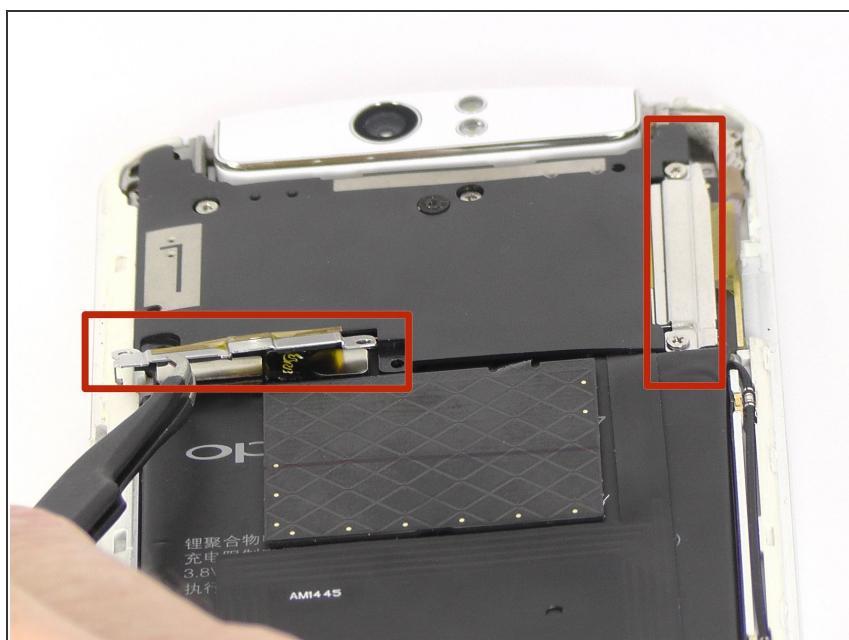


- Use the tweezers or your fingers to remove the silver plates.

## Step 5




- Remove the black plate with your fingers.

## Step 6

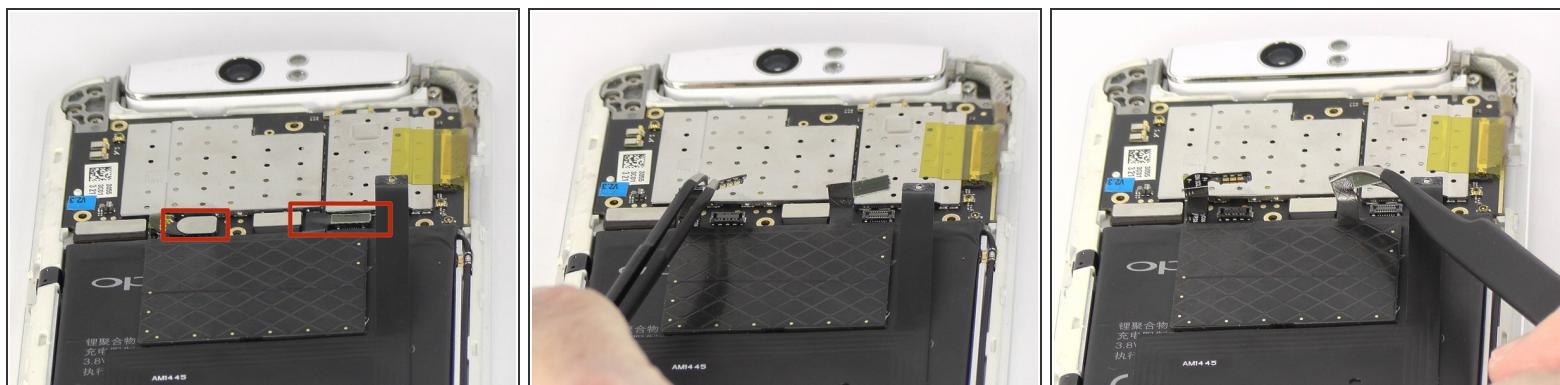


- Use tweezers or your fingers to pull up the connector tabs.

## Step 7

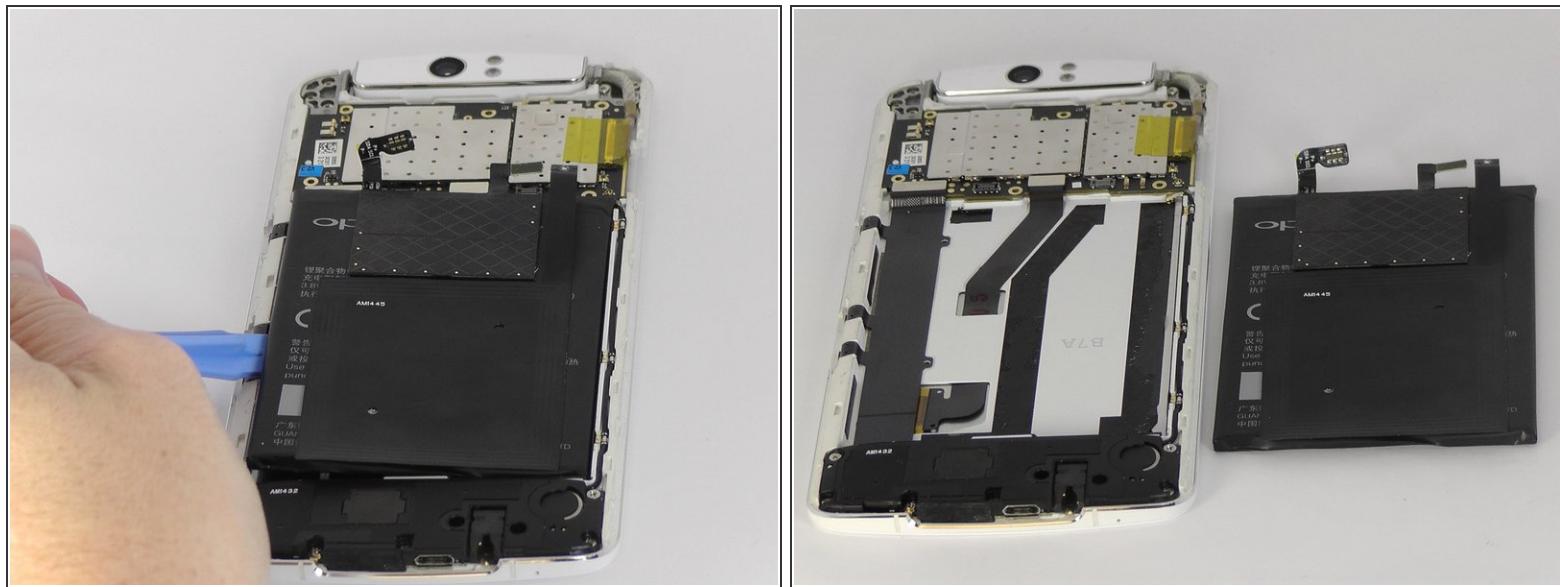


- Use the blue opening tool to carefully pry the battery from the sticky tape that attaches it to the device.

## Step 8 — Motherboard

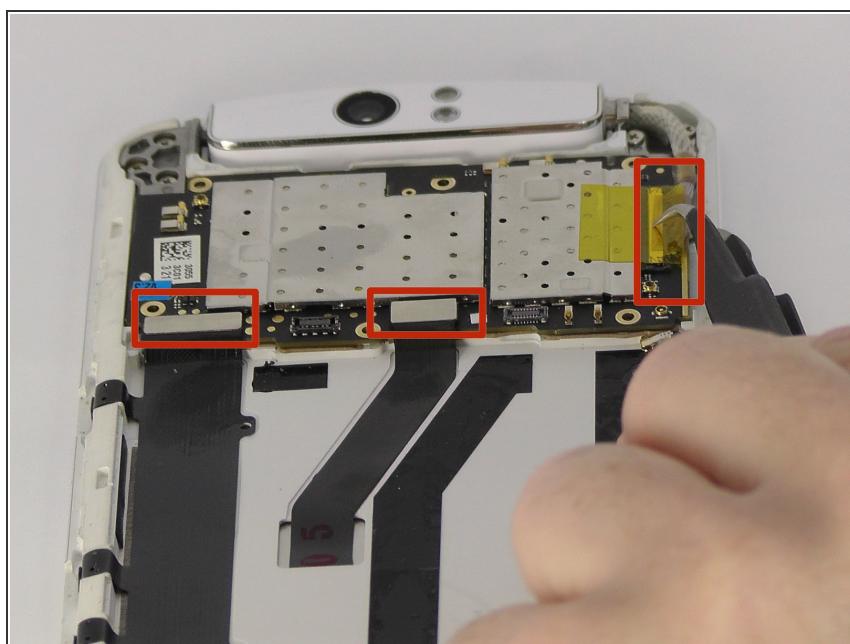


- Use tweezers or fingers to remove the three connector tabs.

## Step 9

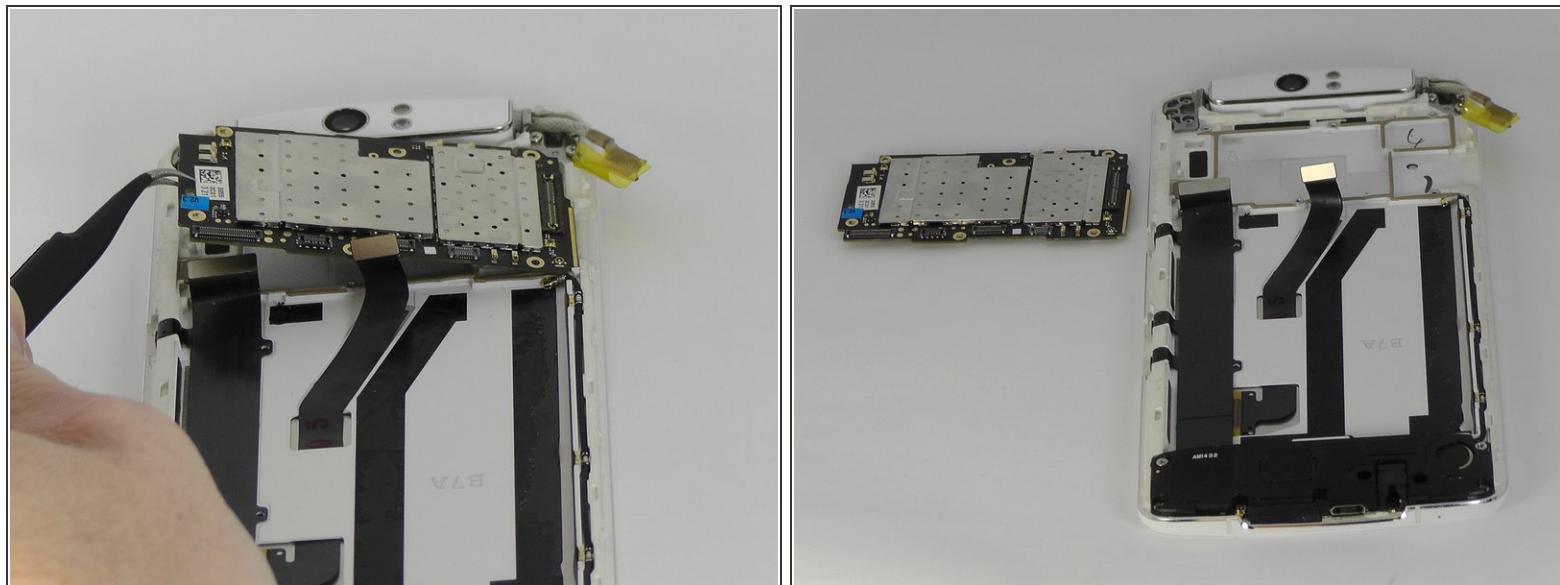


- Use tweezers or your fingers to remove the motherboard.

## Step 10 — Headphone Jack and Speaker Cover

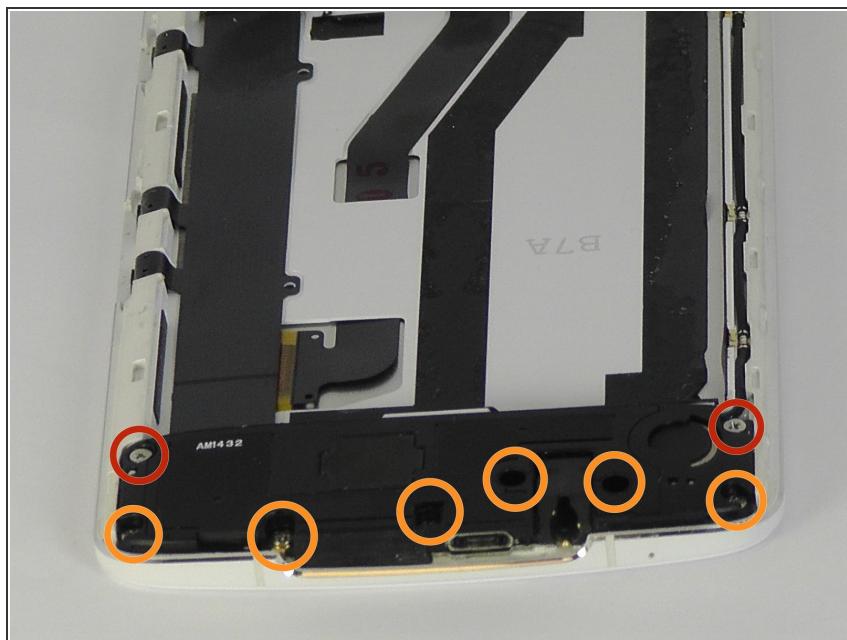


- Remove the two 4mm long screws using the ph0 Phillips head screw driver.
- Remove the six 3mm long screws using the ph0 Phillips head screw driver.

## Step 11

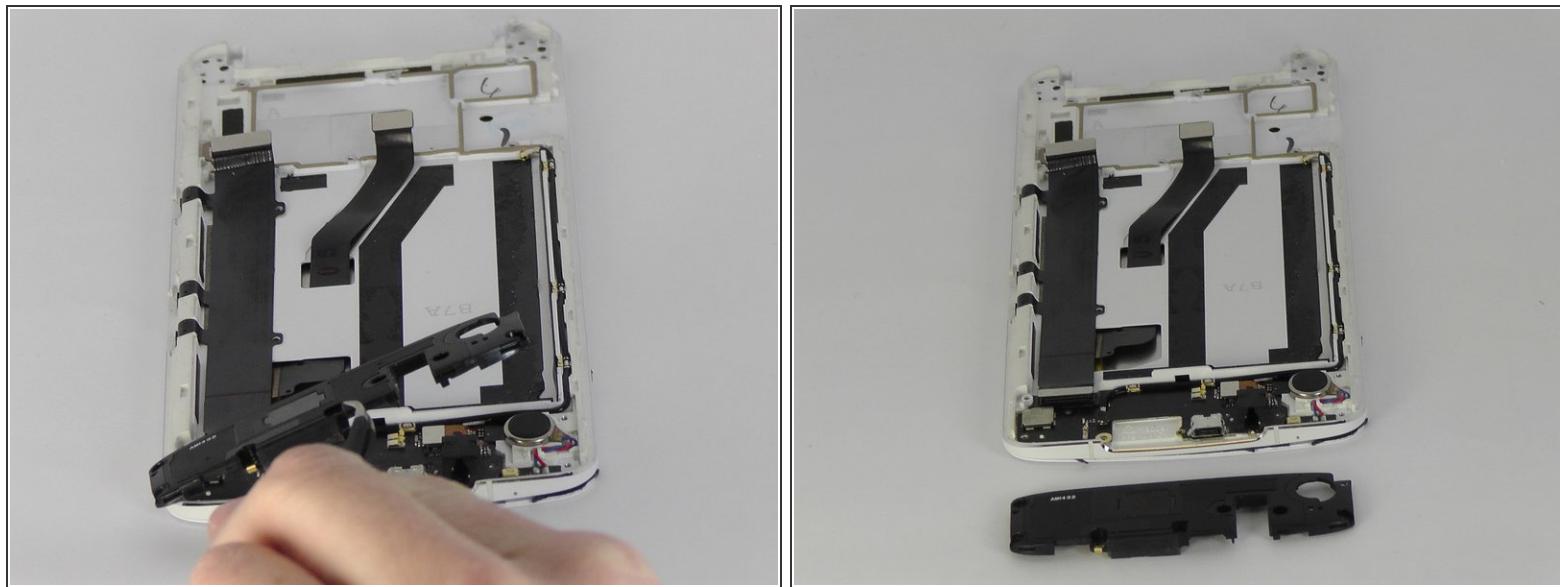


- Use tweezers or your fingers to remove the plastic cover.

## Step 12 — Screen

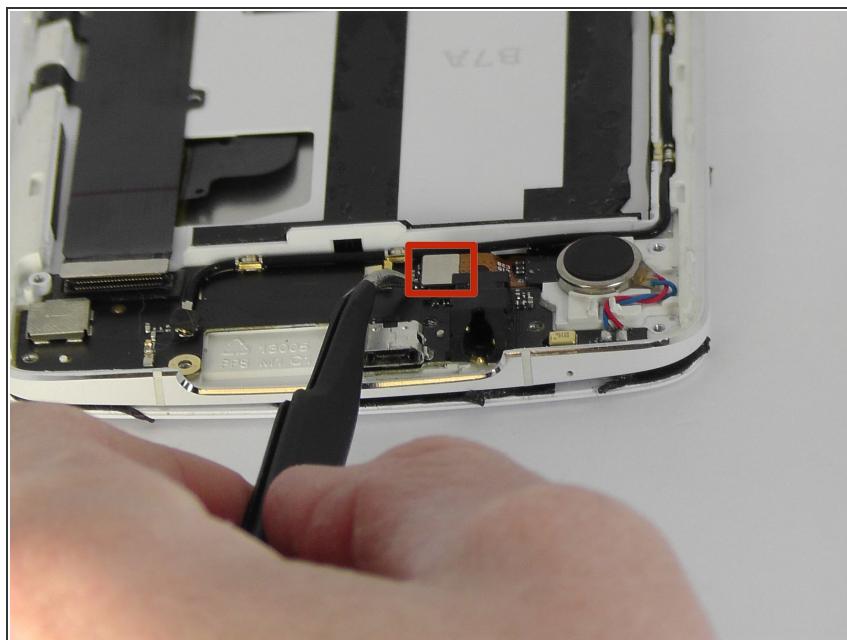

- Use tweezers to disconnect the connector tab.


## Step 13

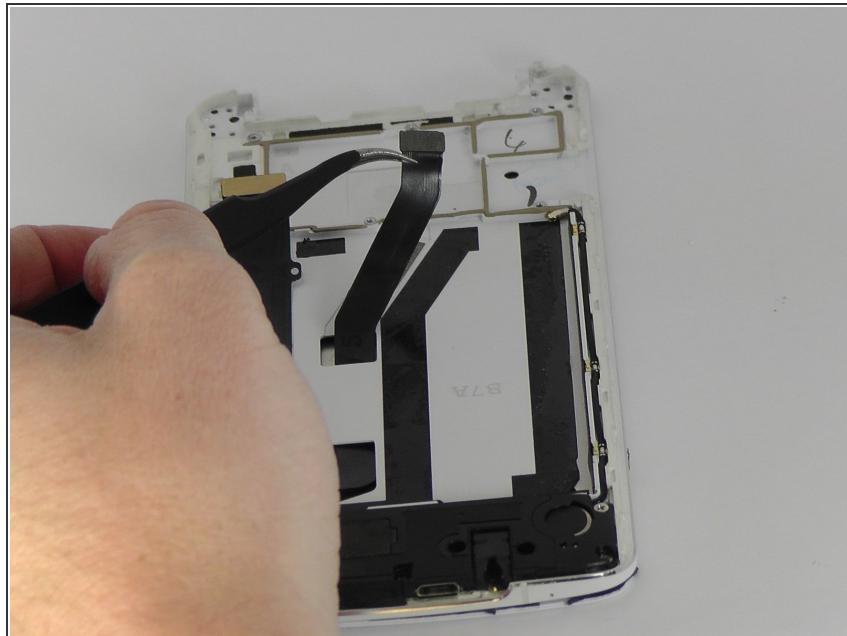

- Use tweezers to peel the black strip from the sticky tape attached to the phone so that the black strip will slide through the phone once the screen is removed.


**⚠** Be gentle removing the black strip at this stage. It can easily tear and it must be removed in order to remove the screen.

## Step 14

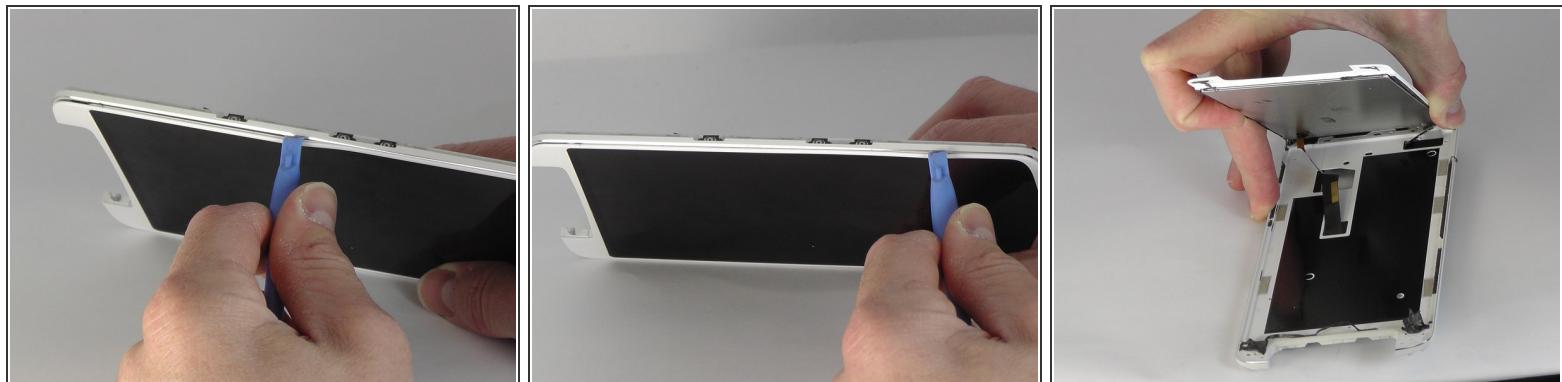

- Insert the blue opening tool into the crevice between the screen and the main body of the phone. Gently slide the tool around the edge of the phone.

## Step 15

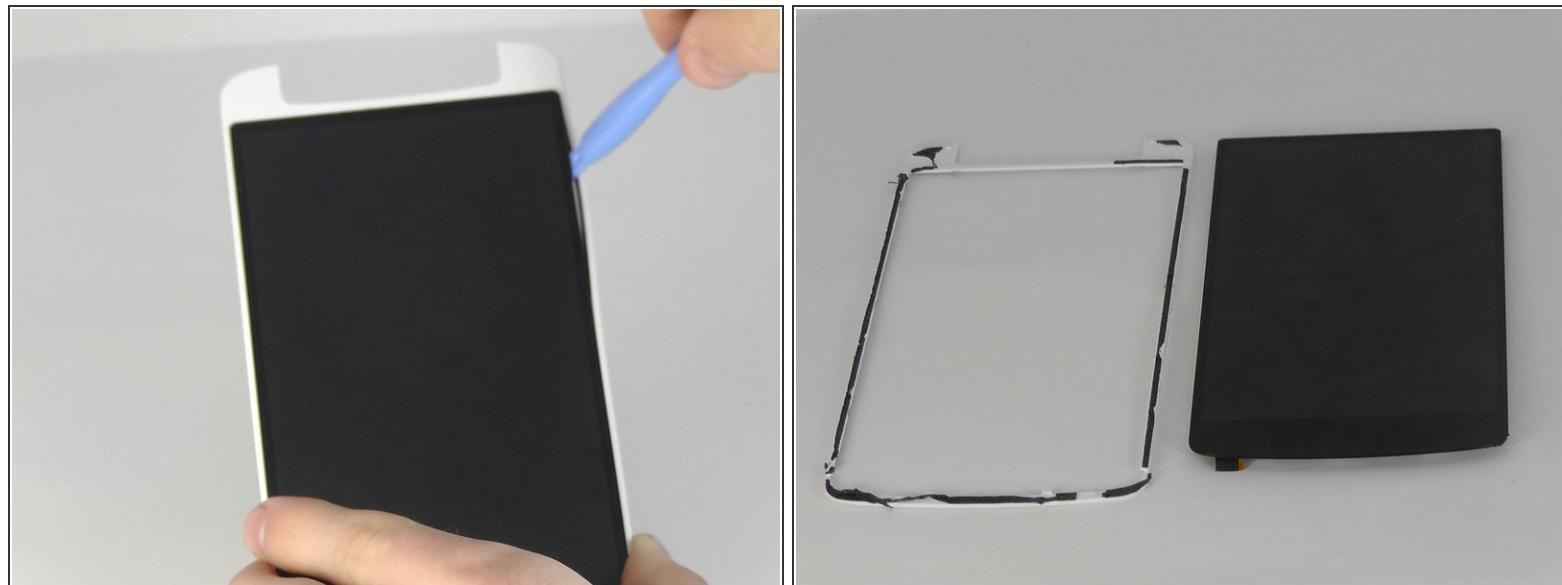

- Insert the blue opening tool in between the black screen and the white border and slide it around the edge of the black screen.

To reassemble your device, follow these instructions in reverse order.