




P775DM3 Replacement The cooler

Written By: Felice Suglia

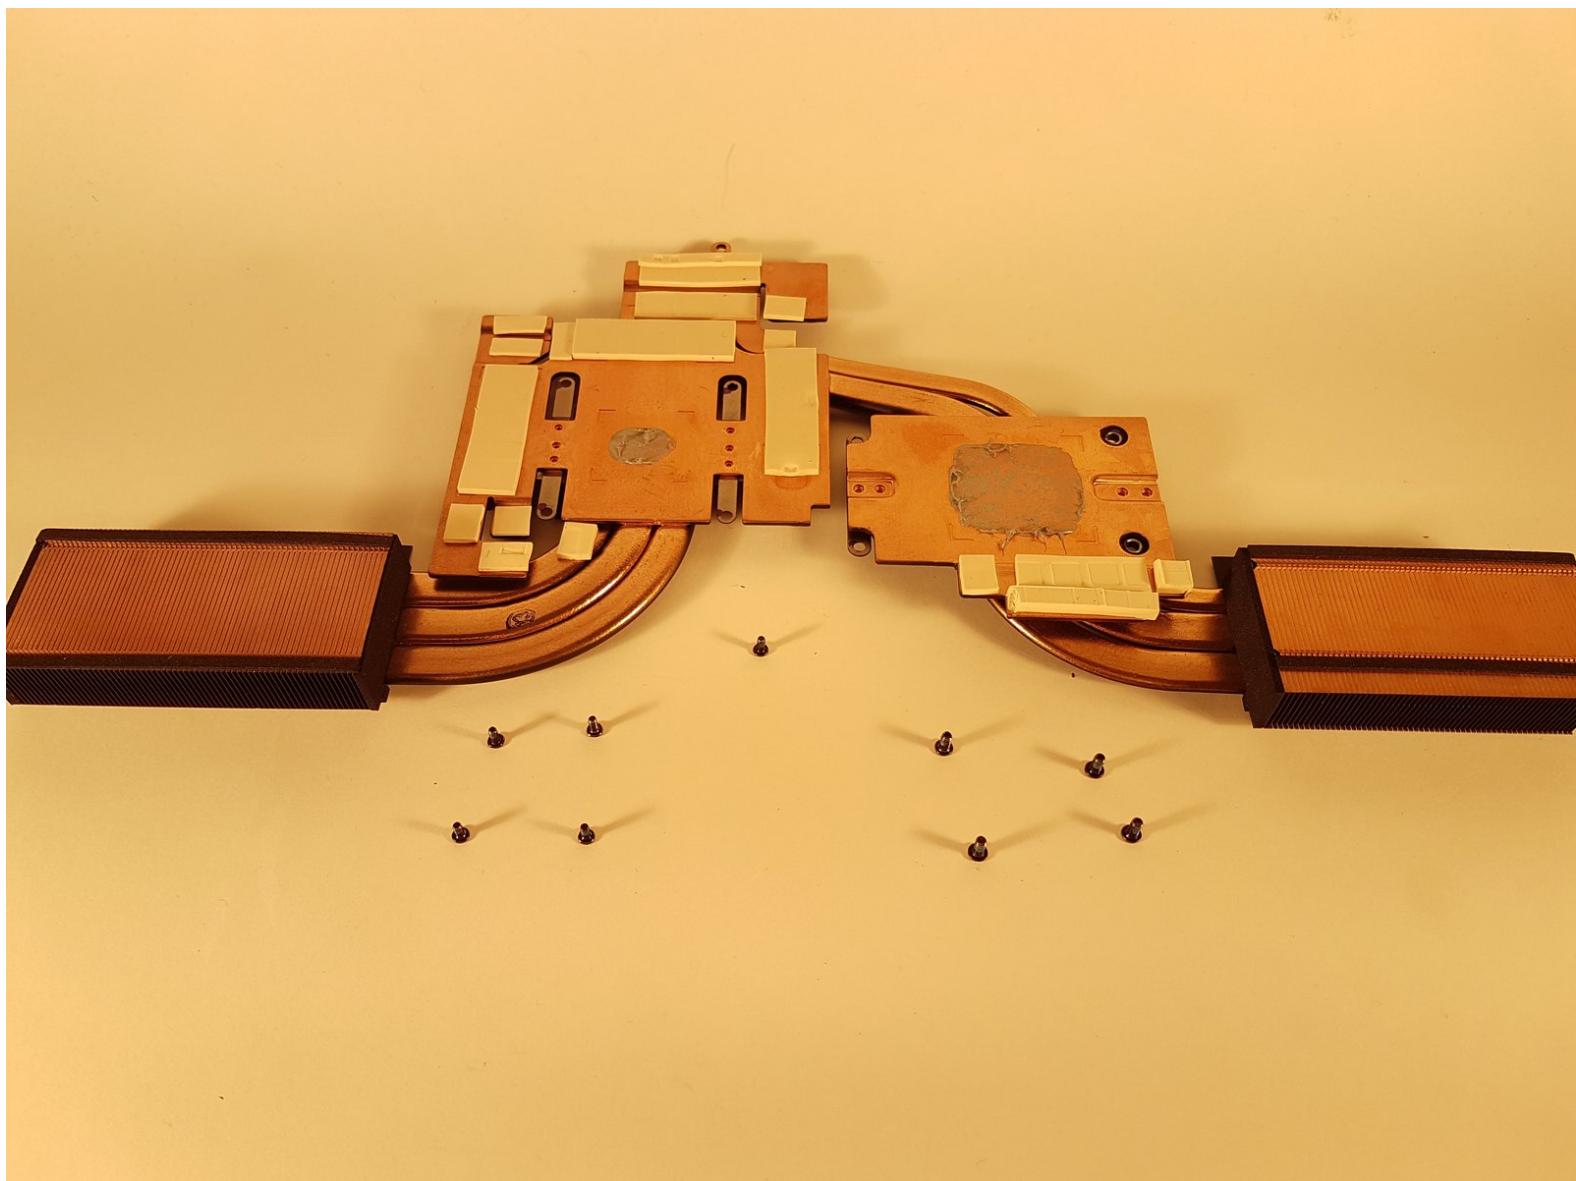


 **TOOLS:**

- [Phillips #0 Screwdriver \(1\)](#)

**PARTS:**

- [New Item \(1\)](#)
- [New Item \(1\)](#)

Step 1 — Battery

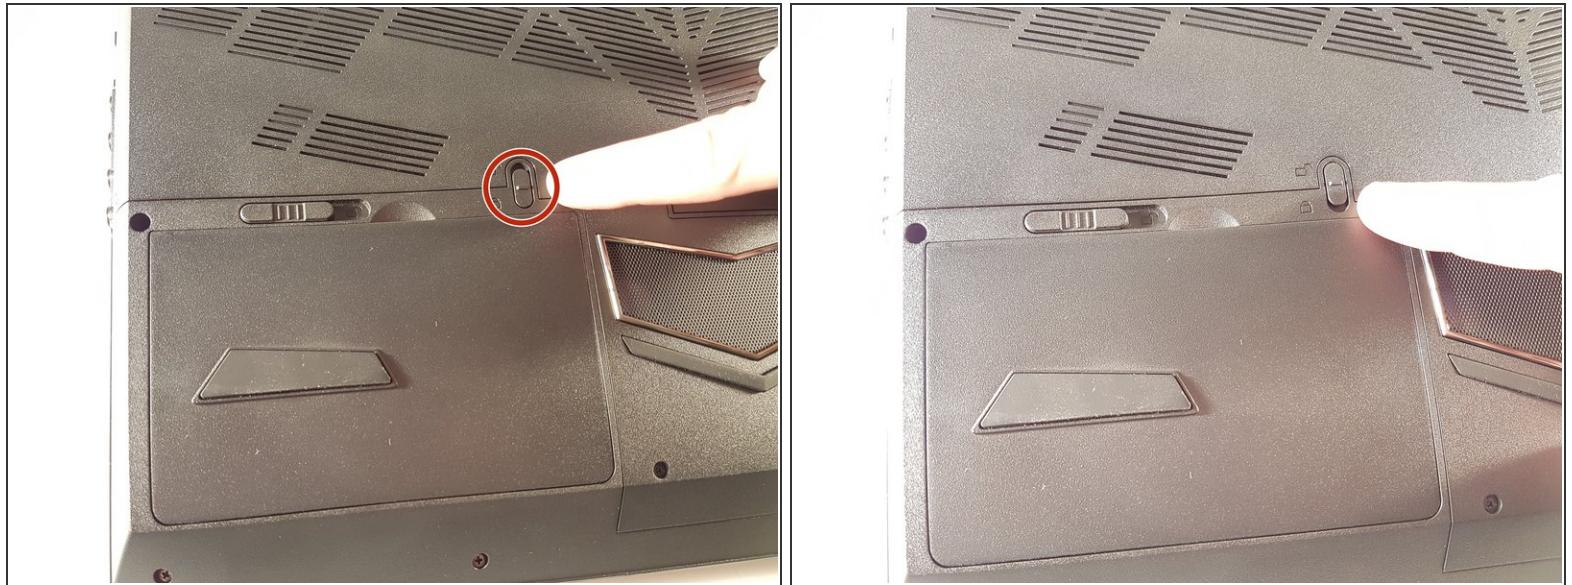

- Unlock the lock marked in red.

Step 2



- Lift up the battery while unlocking the lock marked in red.

Step 3 — Access to major components




- Unscrew the five screws circled in red

Step 4




- Slide the plate in the direction of the red arrow

Step 5

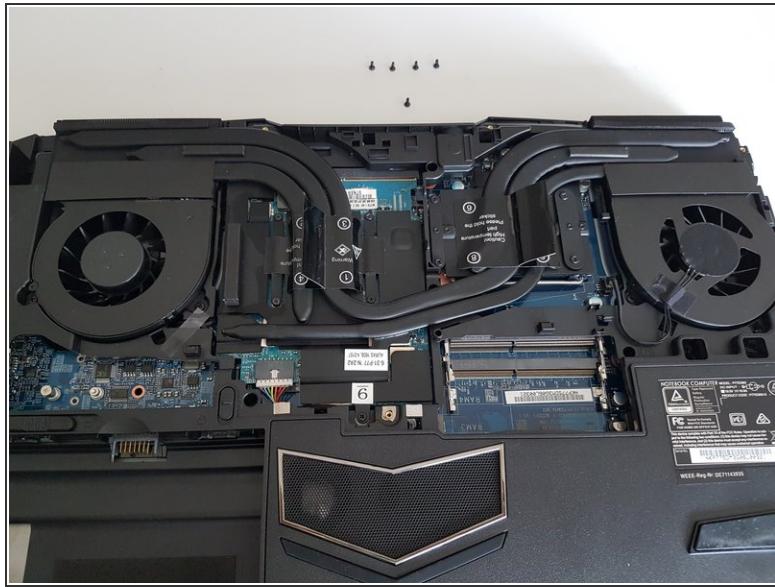

- Lift the plate

Step 6 — The cooler

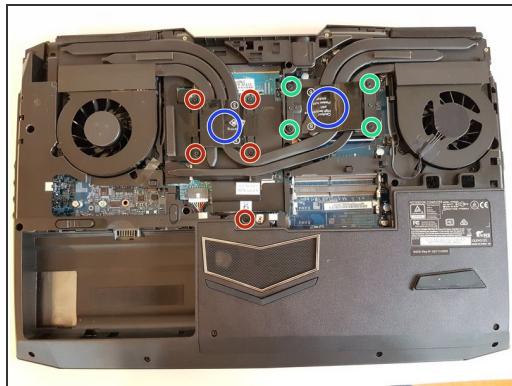

- Unscrew the four large screws circled in green
- Unscrew the five small screws circled in red
- Lift the cooler with the two tabs circled in blue

To reassemble your device follow the following instructions in reverse order