



P775DM3 Replacement of fans

Written By: Felice Suglia



 **TOOLS:**

- [Phillips #0 Screwdriver \(1\)](#)

 **PARTS:**

- [New Item \(1\)](#)
- [New Item \(1\)](#)

Step 1 — Battery



- Unlock the lock marked in red.

Step 2




- Lift up the battery while unlocking the lock marked in red.

Step 3 — Access to major components




- Unscrew the five screws circled in red

Step 4

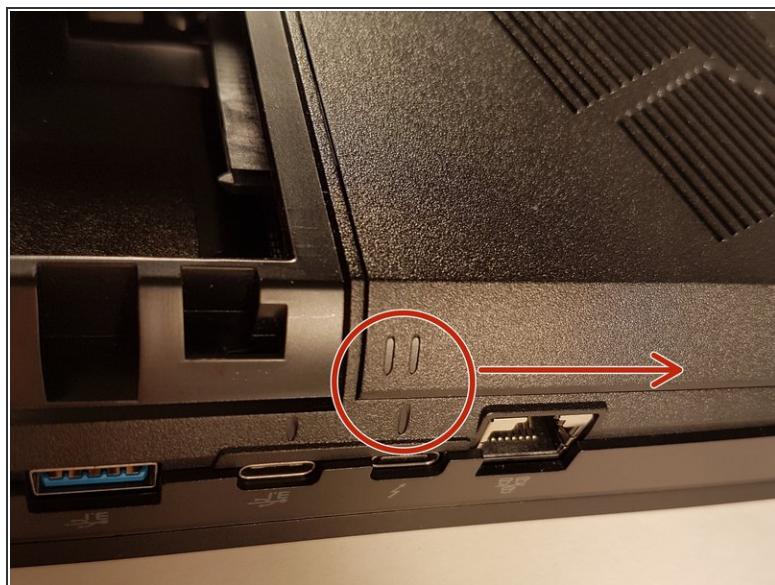


- Slide the plate in the direction of the red arrow

Step 5

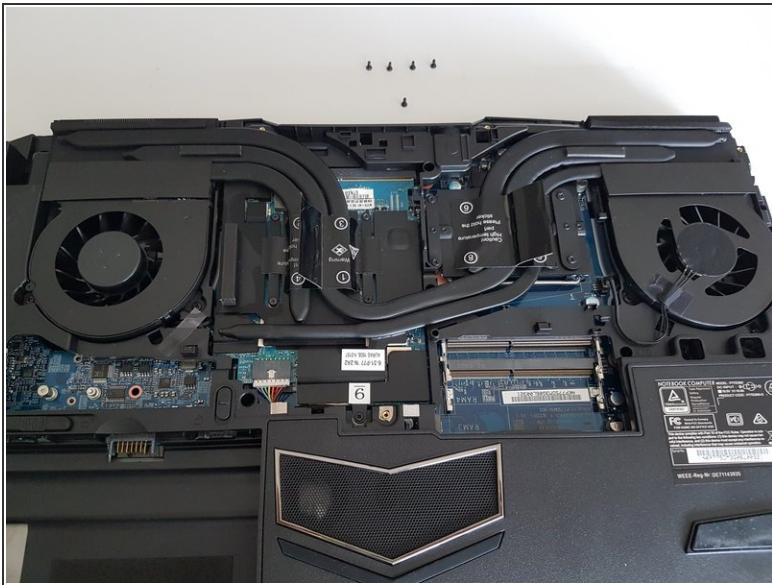


- Lift the plate

Step 6 — The cooler

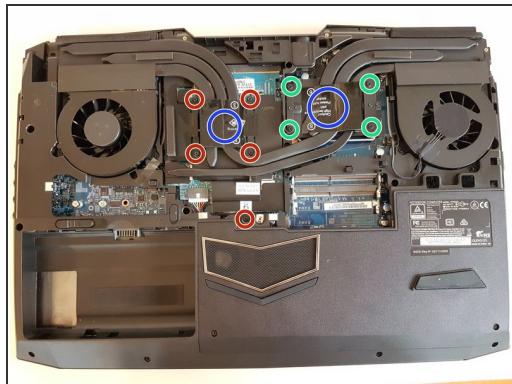




- Unscrew the four large screws circled in green
- Unscrew the five small screws circled in red
- Lift the cooler with the two tabs circled in blue

Step 7 — Graphic card

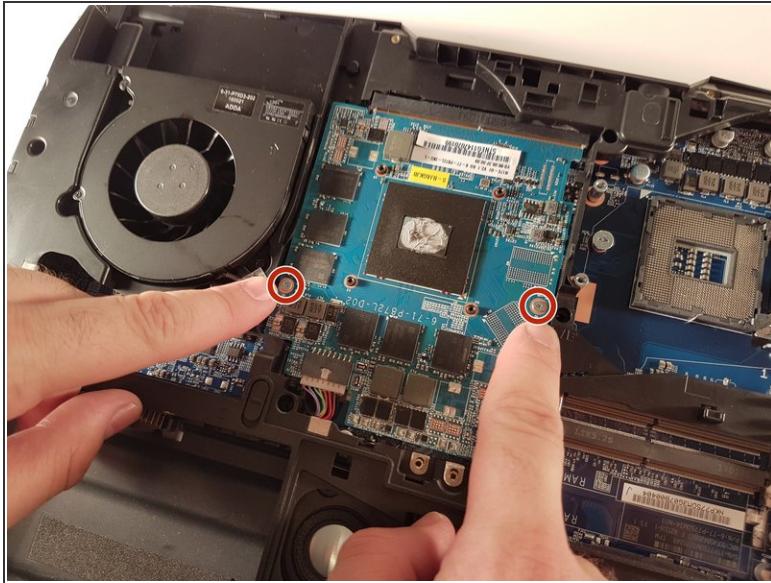

- Unscrew the two screws circled in red

Step 8

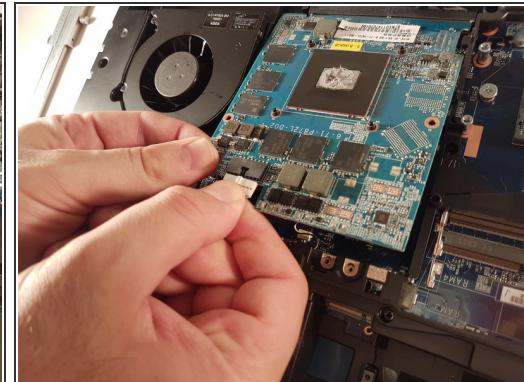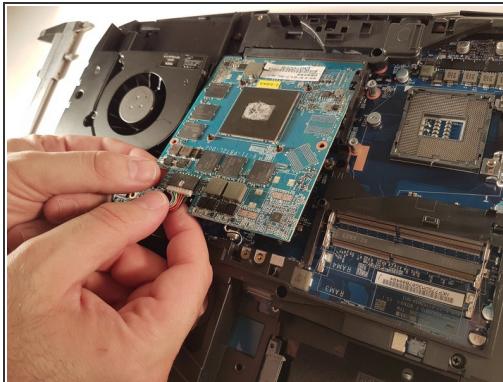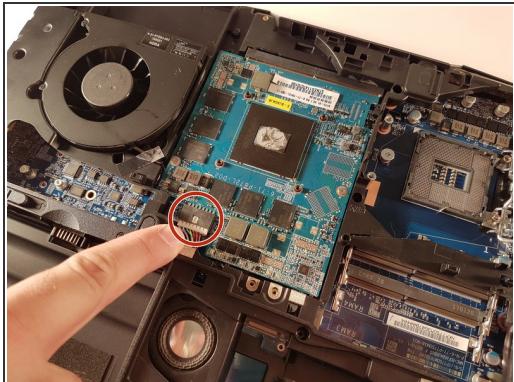


- Lift the card to allow access to the red circled connector
- Disconnect the red circled connector

Step 9



- Pull it in the direction of the red arrow

Step 10 — Fans

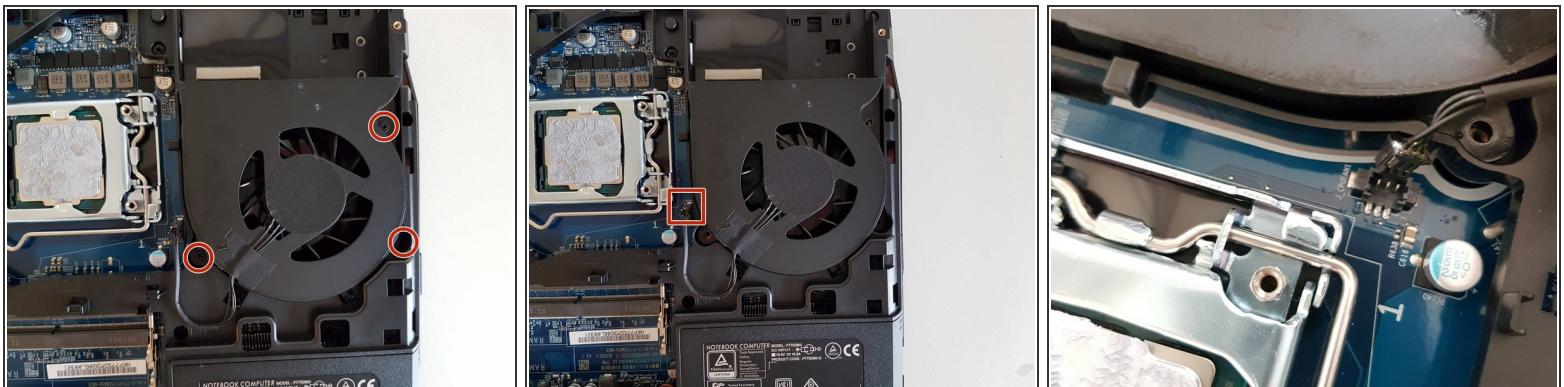



- Unscrew the three screws circled in red
- Disconnect the framed connector in red

Step 11



- Remove the fan

Step 12

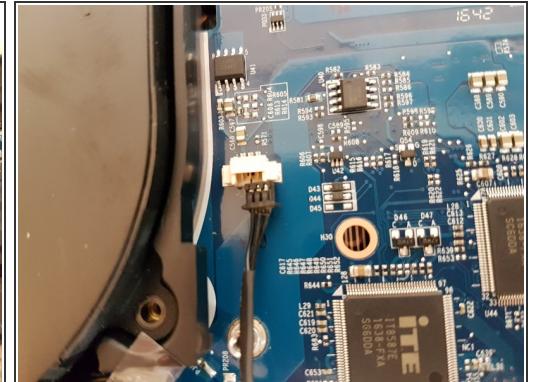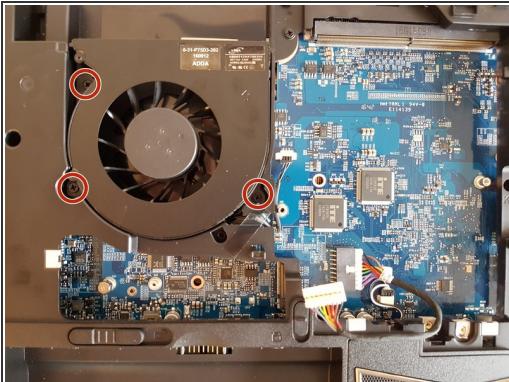

- Unscrew the three screws circled in red
- Disconnect the framed connector in red

Step 13



- Lift the fan

To reassemble your device follow the following instructions in reverse order