



# P775DM3 Replacement of the processor

Written By: Felice Suglia



 **TOOLS:**

- [Phillips #0 Screwdriver \(1\)](#)
- [Tweezers \(1\)](#)

 **PARTS:**


- [New Item \(1\)](#)
- [New Item \(1\)](#)

## Step 1 — Battery



- Unlock the lock marked in red.

## Step 2

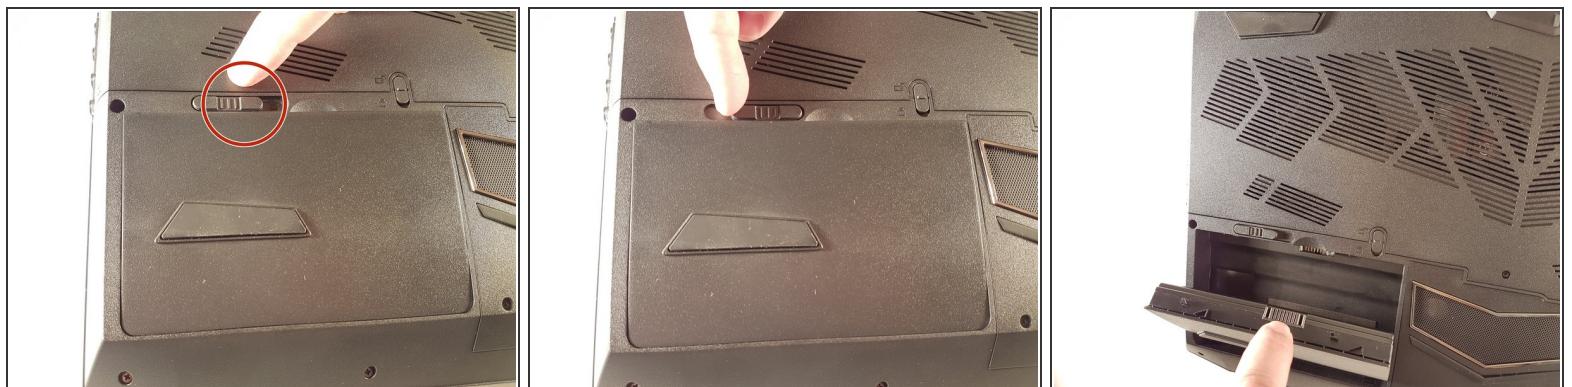

- Lift up the battery while unlocking the lock marked in red.

## Step 3 — Access to major components




- Unscrew the five screws circled in red

## Step 4




- Slide the plate in the direction of the red arrow

## Step 5

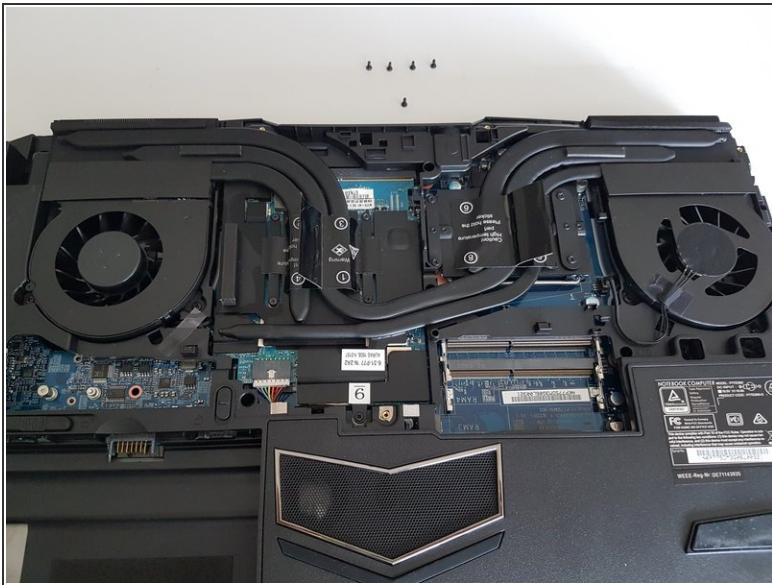

- Lift the plate

## Step 6 — The cooler

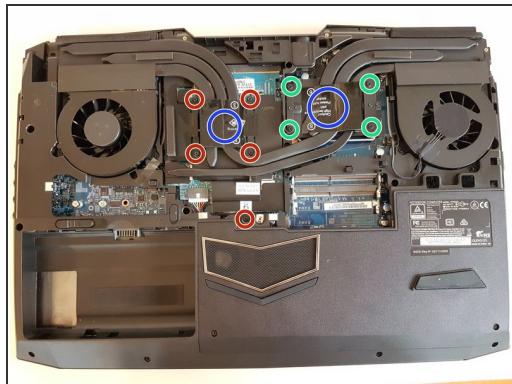

- Unscrew the four large screws circled in green
- Unscrew the five small screws circled in red
- Lift the cooler with the two tabs circled in blue

## Step 7 — processor



- Pull the lever circled in red in the direction of the red arrow while pressing on it
- Attention: Do not touch the bottom of the processor and take the side

To reassemble your device follow the following instructions in reverse order