



Palm Treo 600 Front Case Replacement

Written By: Michael Polka



INTRODUCTION

After you have taken off the back case, the front case can also be removed to help you complete other teardown guides.

TOOLS:

- [T6 Torx Screwdriver](#) (1)

Step 1 — Back Case



- On the back of the device, locate the 3 rubber plugs, and use a plastic spudger to remove them.


Step 2



- Use the T6 Torx Screwdriver to remove all 4 screws.

(i) You have to first remove the Stylus to access the 4th screw.


Step 3

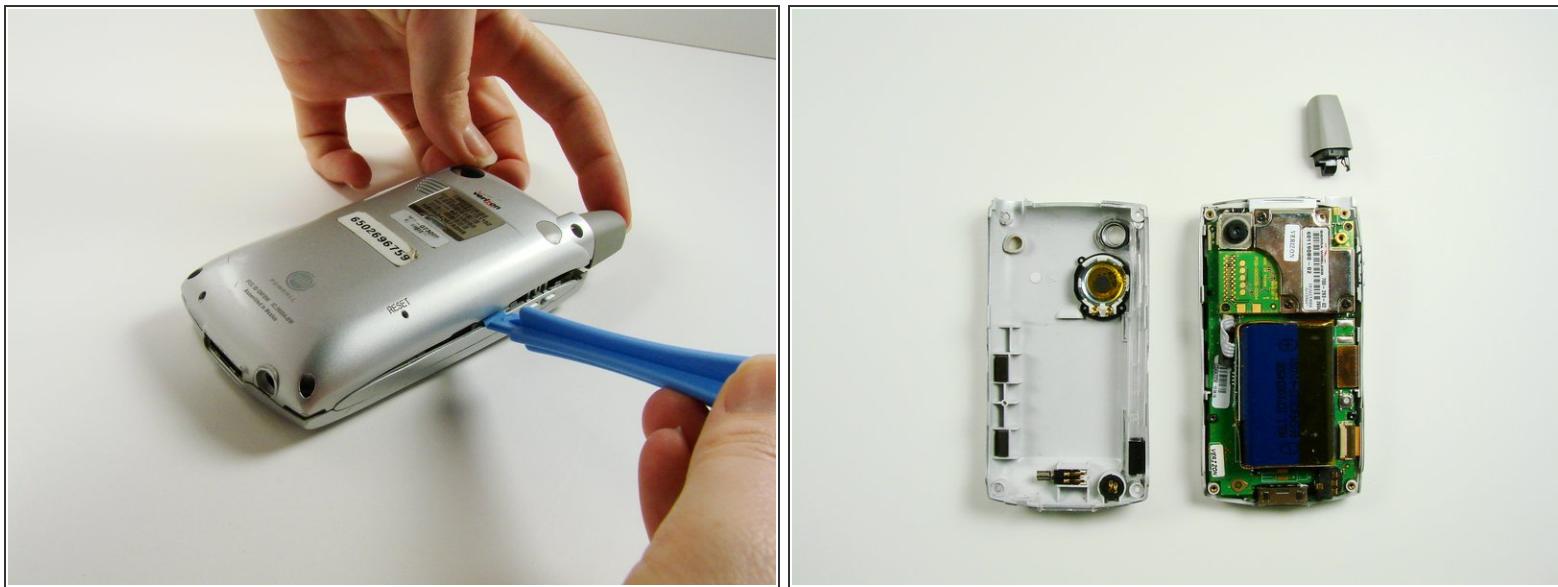

- Using a plastic opening tool, carefully separate the front and back cases.

(i) Note: The antenna will detach from the phone.

Step 4 — Front Case

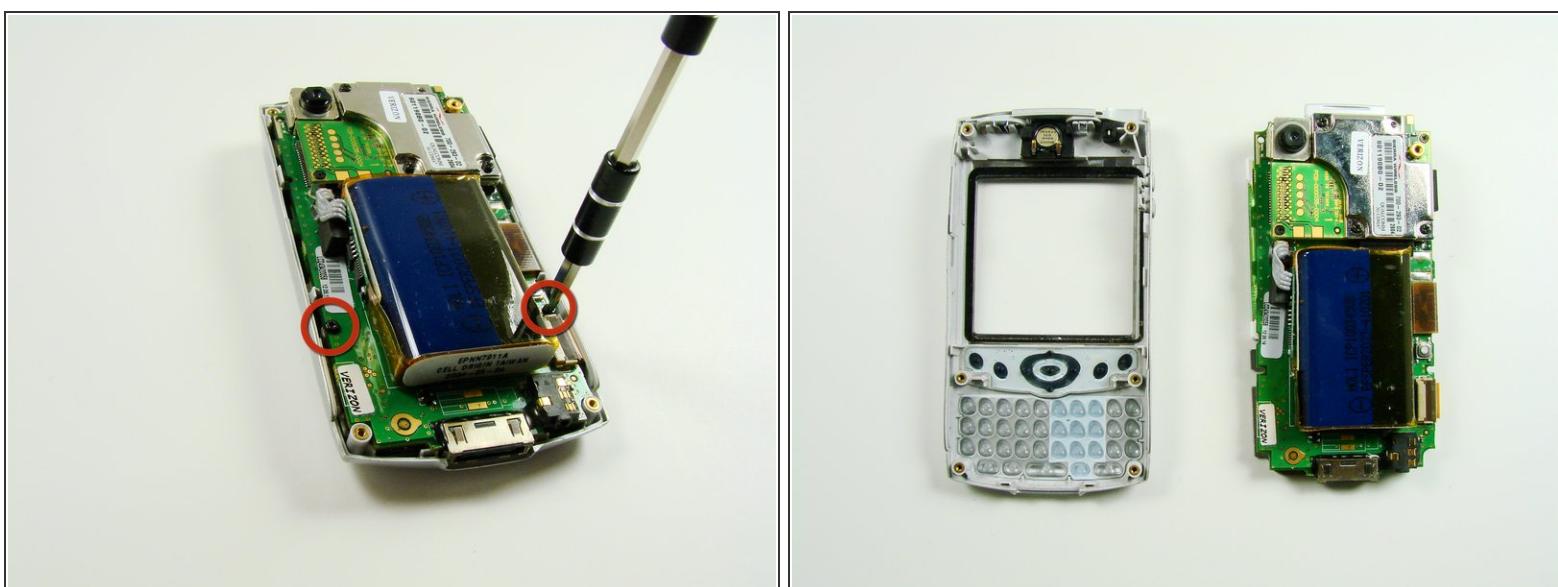

- Using a T6 Torx Screwdriver, remove the two screws.

(i) The motherboard will now be loose from the front case.

To reassemble your device, follow these instructions in reverse order.