




Palm Zire m150 Screen Replacement

Written By: Kate

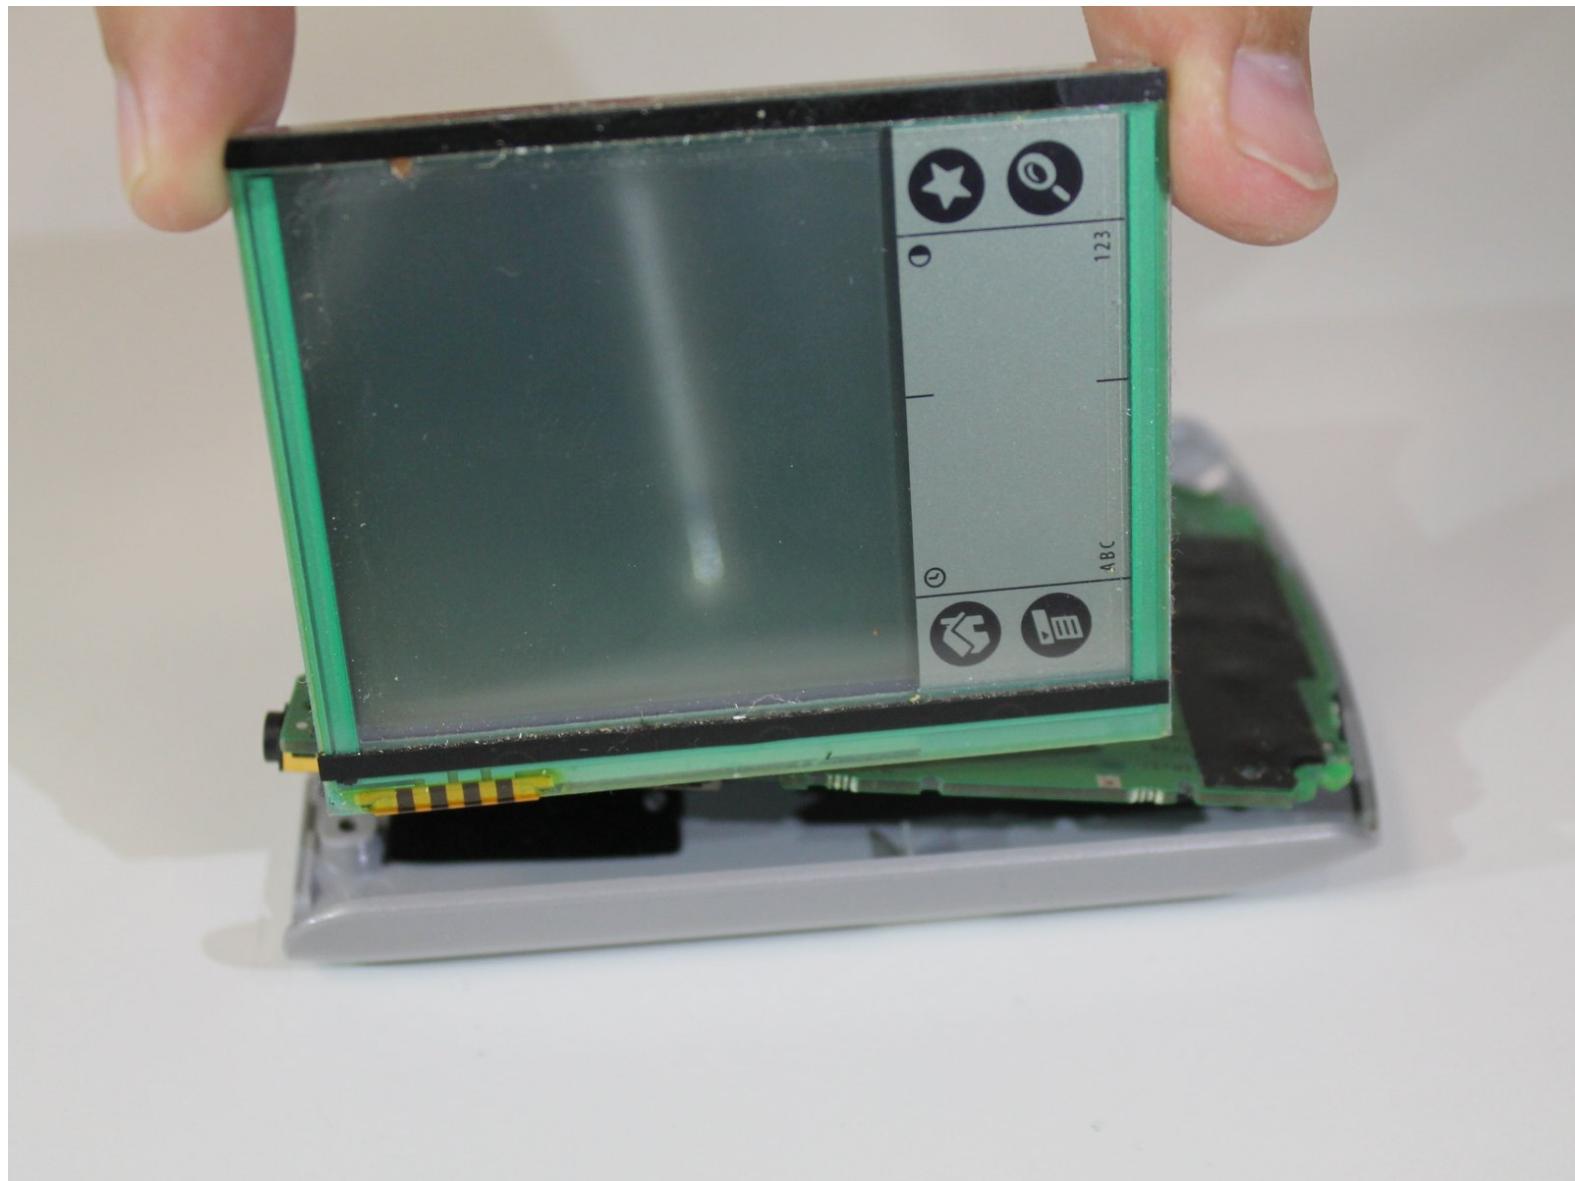

Step 1 — Screen



- Lift the flap on the Palm Zire M150 to see the back and all of the screws.

Step 2




- Use the T6 bit screw driver, and carefully remove the screws at the top of the device.

Step 3



- Turn the device over with the screen facing up. Gently pull the top and bottom cover from the device, as shown in the second photo.

Step 4

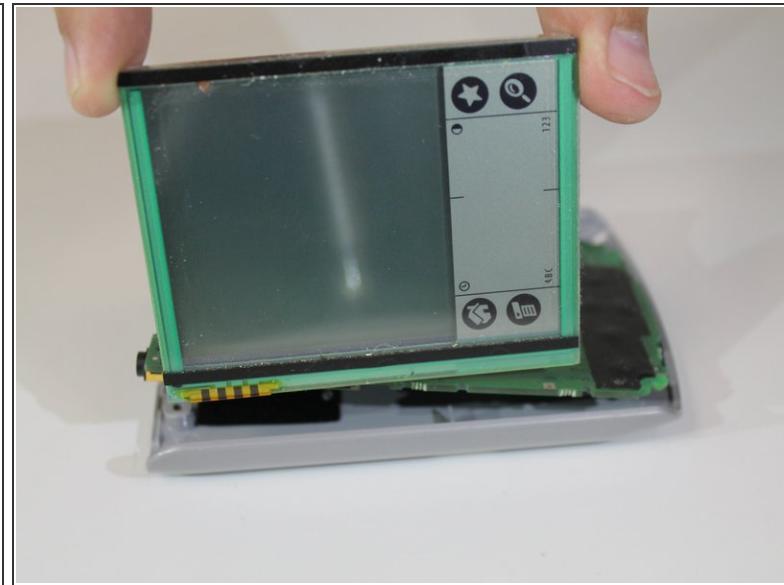

- Carefully lift the screen from the device, and replace it with a new one.

To reassemble your device, follow these instructions in reverse order.