




Phone Buttons Replacement

It is possible that the buttons may get jammed from time to time. This guide will show necessary steps to arrange them to work properly.

Written By: tellocordova

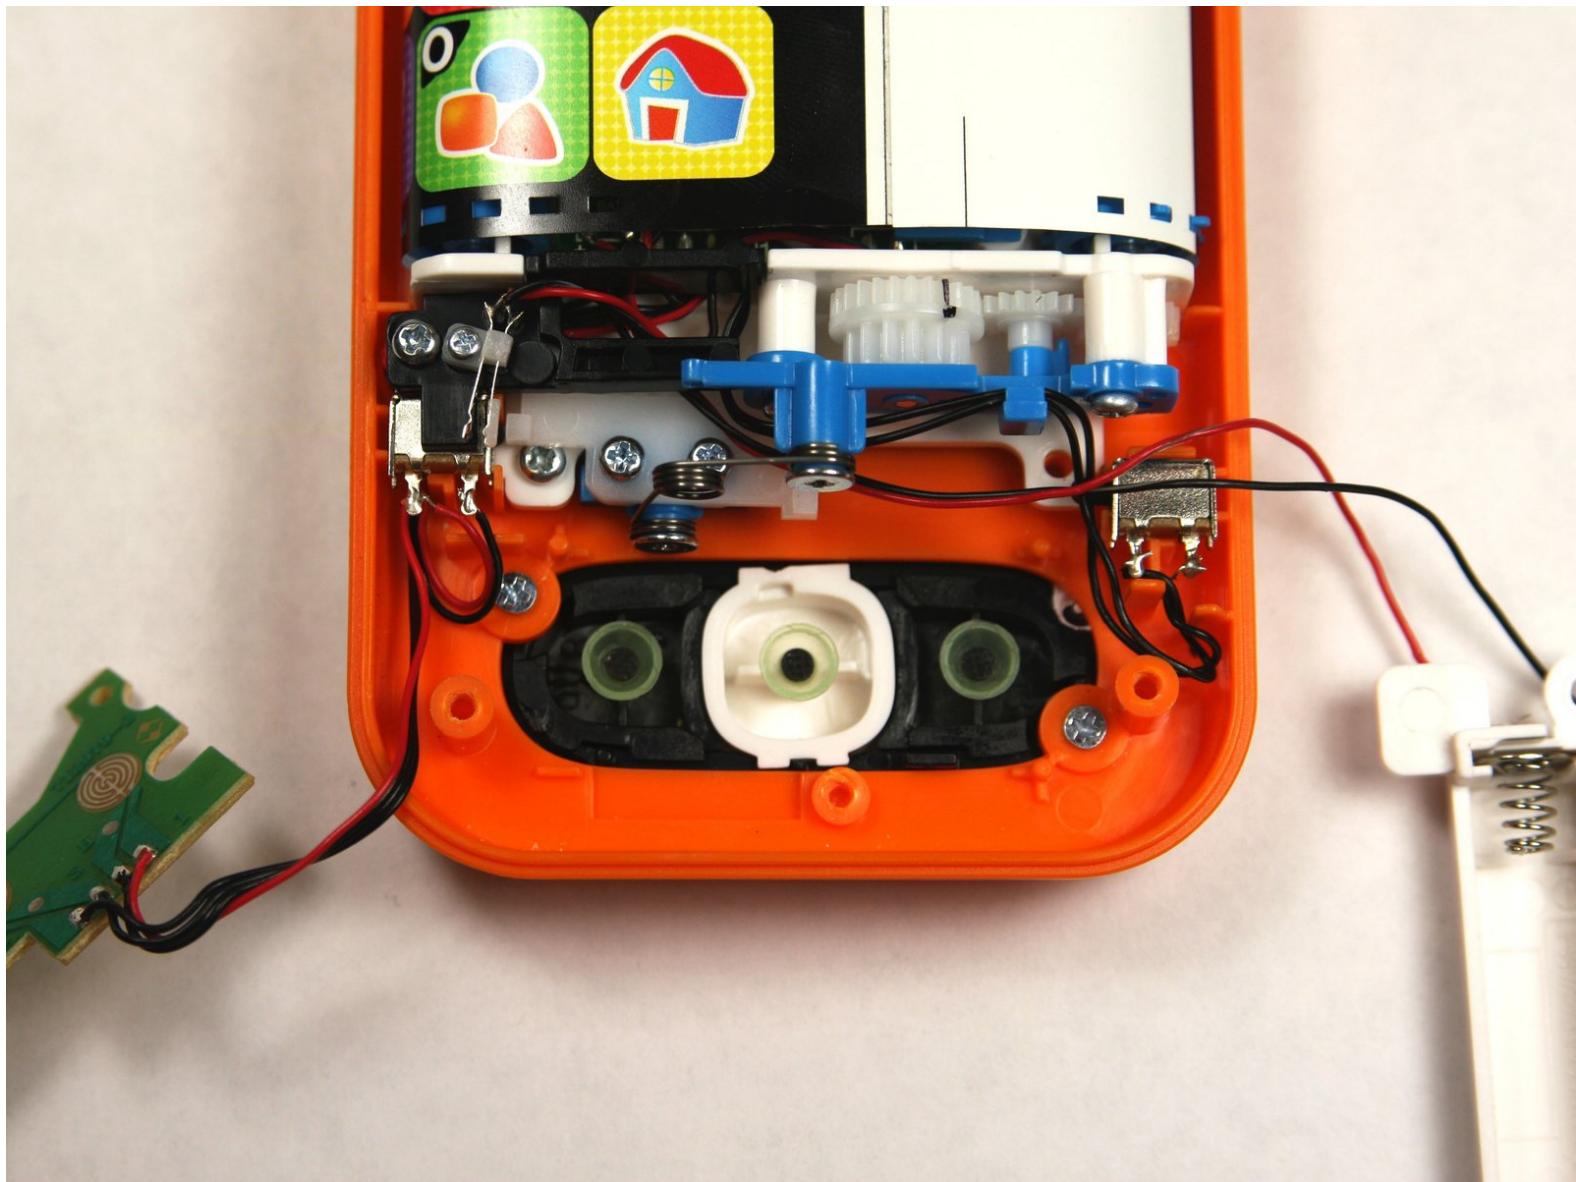

INTRODUCTION

This guide requires basic disassembly skills to get inside the phone. Allowing you to pull out and then realign the buttons.

TOOLS:


- [Phillips #1 Screwdriver \(1\)](#)
- [Phillips #0 Screwdriver \(1\)](#)

Step 1 — Battery



- Using a Phillips #1 screwdriver, remove the 4.8mm Phillips #1 screw on the battery cover by twisting the screwdriver counter-clockwise.

Step 2

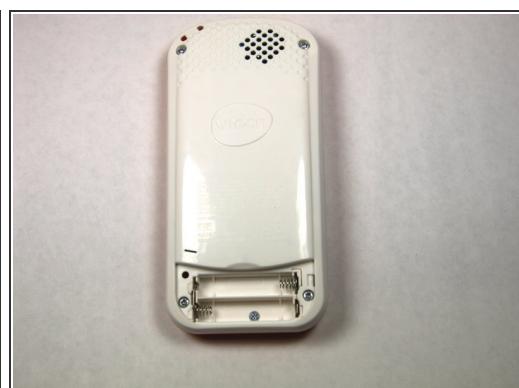


- Then simply remove the two AAA batteries by pulling on one end of the battery and lifting it straight out.

Step 3




- Take care when you want to close it. There is a notch.
- First you have to hook up that notch.
- Then firmly use a PH1 screwdriver to secure it.

Step 4 — Buttons

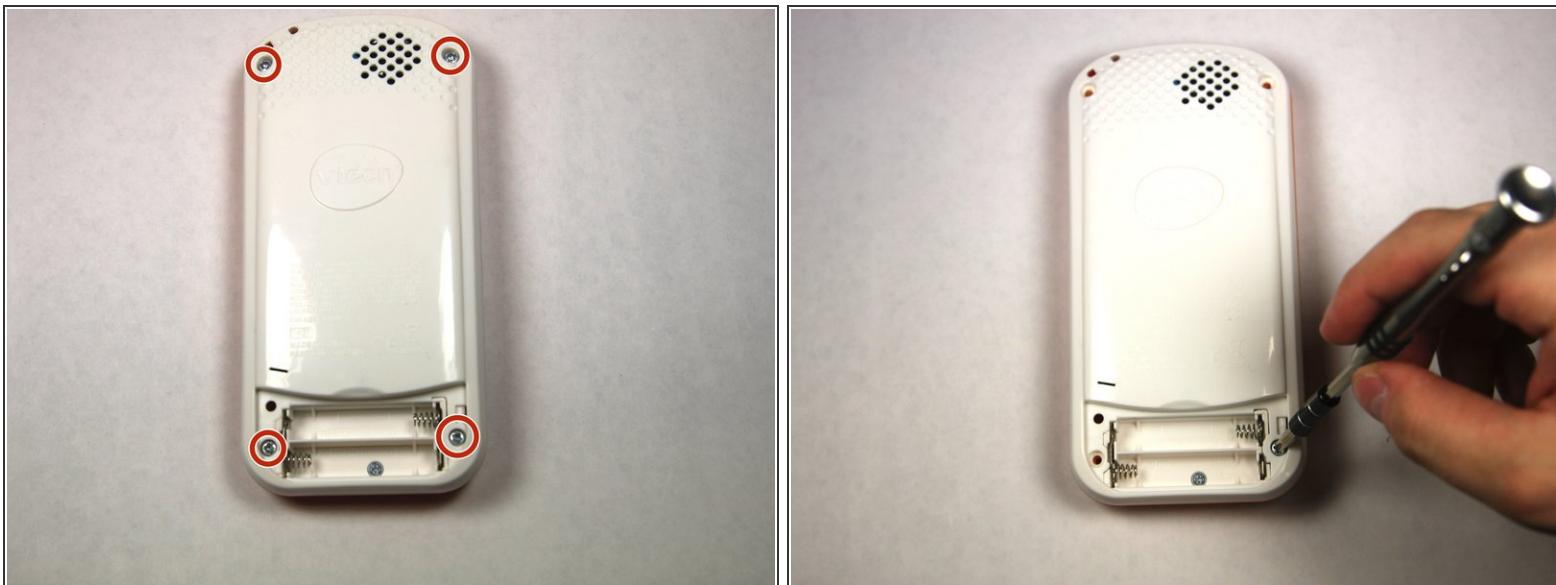


- Remove 4 13.8mm screws holding the device back using a Phillips #1 screw driver.

Step 5

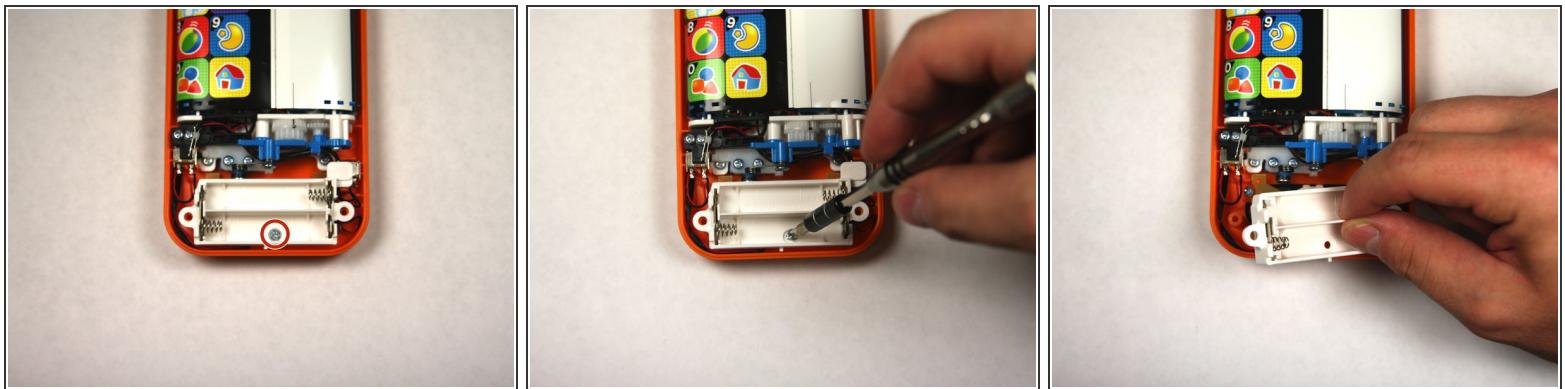


- Removed 1 4.8mm phillips head screw with a #0 Phillips head screw driver and lift away battery back being conscientious of wires.

Step 6

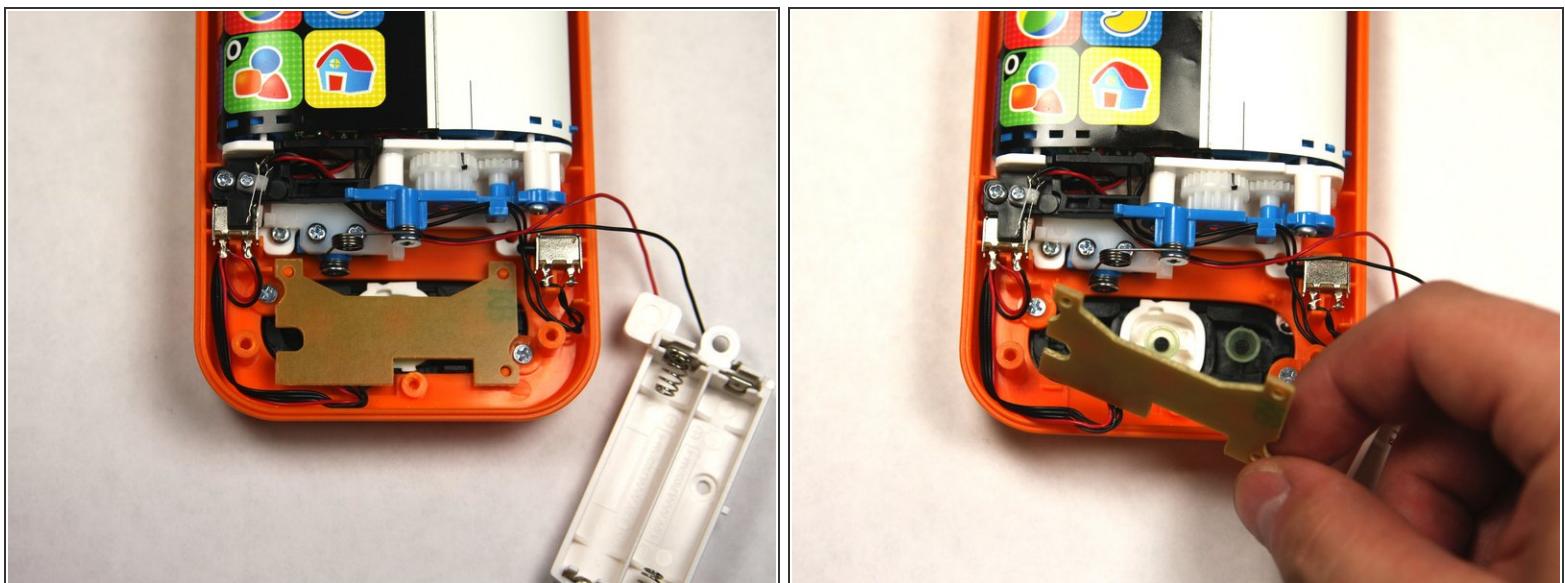

- Carefully remove the button board to gain access to the buttons.

Step 7

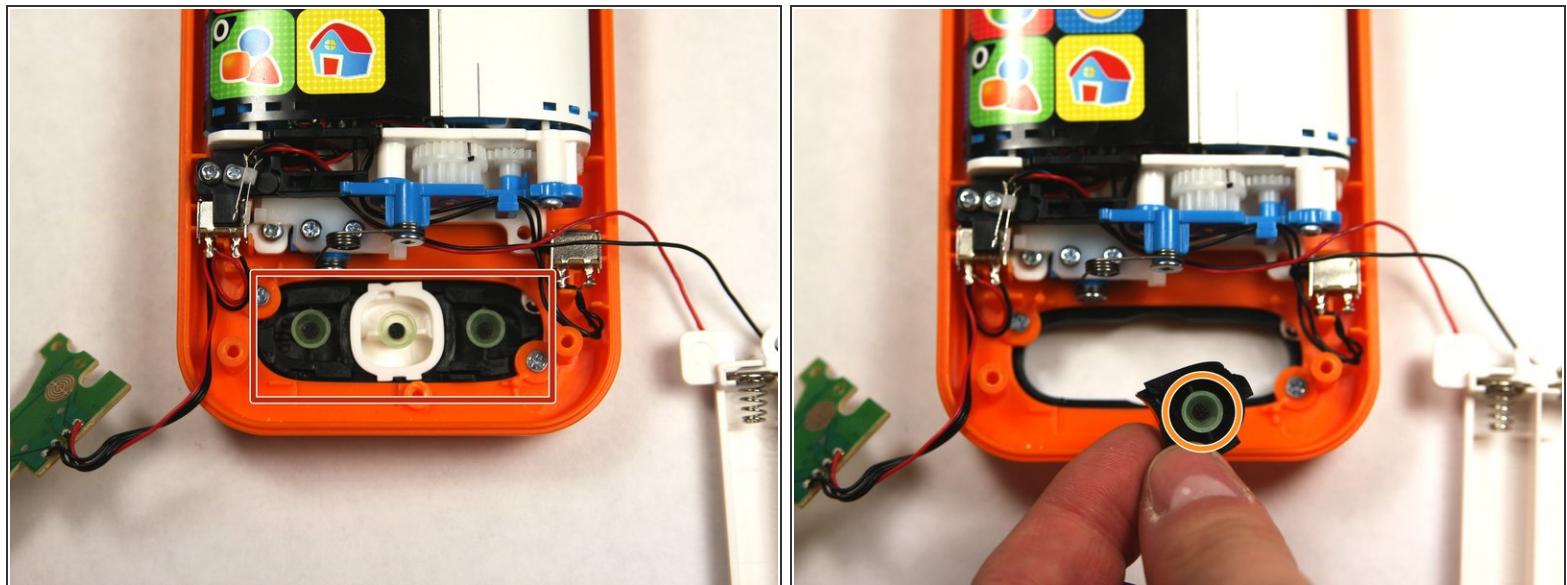

- Carefully remove each button from the baby phone.
- When handling buttons be sure not to misplace the button contacts.

To reassemble your device, follow these instructions in reverse order.