



Pioneer A1 XW-SMA1-K Antenna Replacement

How to replace the antenna in your Pioneer A1 XW-SMA1-K speaker.

Written By: Drew Dickenson



INTRODUCTION

If you are looking to replace the antenna of your Pioneer A1 XW-SMA1-K, here is your replacement guide.



TOOLS:

- [Metal Spudger](#) (1)
 - [Phillips #1 Screwdriver](#) (1)
-

Step 1 — Back Panel




- Use the spudger to remove the mesh front panel.

Step 2



- Use a Phillips #1 screwdriver to remove the thirteen 12 mm screws in the speaker frame.
- Remove the speaker frame by pulling vertically upwards revealing the motherboard.

Step 3

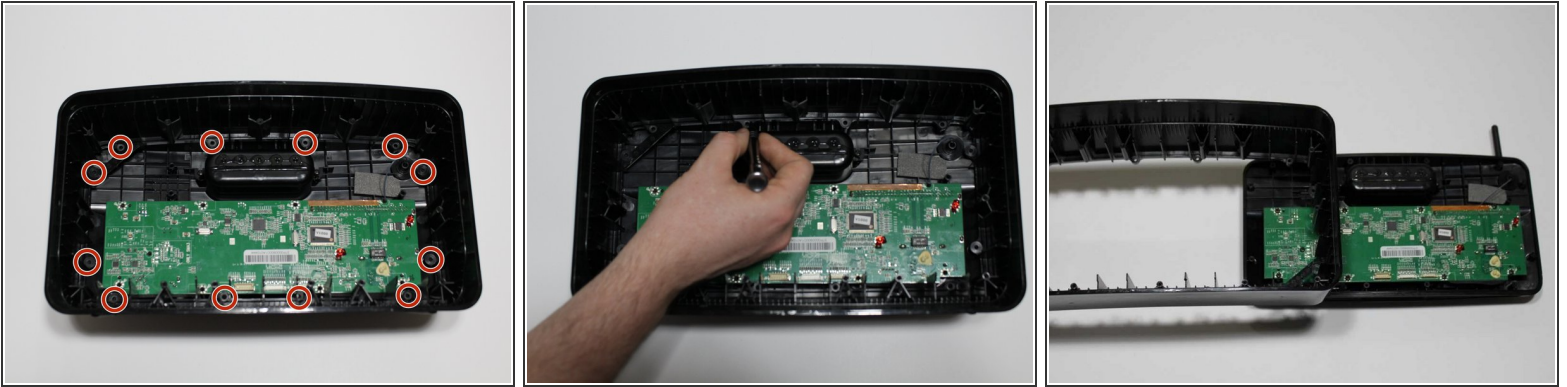

- Use a Phillips #1 screwdriver to remove the twelve 12 mm screws from the middle frame.
- Remove the middle frame by pulling upward and vertically.

Step 4



- Use the Phillips #1 screwdriver to remove the nine 12 mm screws from the motherboard.
- Flip the motherboard over.
- Remove the motherboard by detaching the antenna.

Step 5 — Motherboard



- Remove the motherboard from the speaker.

Step 6 — Antenna



- Flip over the back panel and pull the antenna up and out.

To reassemble your device, follow these instructions in reverse order.