



# PlayStation 3 Slim Hard Drive Replacement

Written By: Andrew Bookholt



 **TOOLS:**

- Phillips #1 Screwdriver (1)

## Step 1 — Hard Drive




- Turn the PS3 over and lay it on its backside.
- Use the flat edge of a metal spudger to pop up the small access door on the bottom cover near the front of the PS3.
- Remove the blue Phillips screw hidden under the access door.

## Step 2



- Slide the hard drive bay cover toward the right side of the lower case, then pull it away from the front edge to remove it from the PS3.

## Step 3

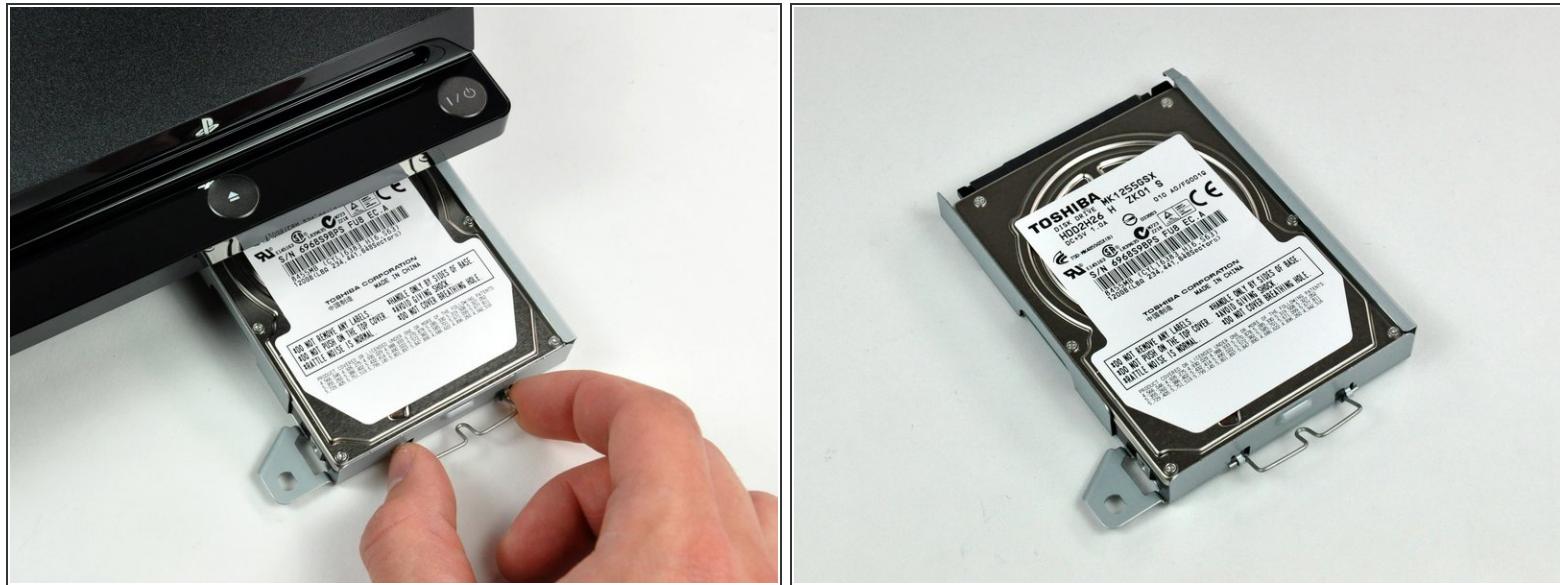

- Using its attached metal handle, pull the hard drive out of its bay.

To reassemble your device, follow these instructions in reverse order.