



PlayStation 3 Slim Hard Drive Replacement

Replace your hard drive for more storage space.

Written By: Andrew Bookholt



INTRODUCTION

Use this guide to replace your PlayStation 3 Slim's SATA hard drive.

TOOLS:

- Metal Spudger (1)
- Phillips #1 Screwdriver (1)

PARTS:

- 500 GB 5400 RPM 2.5" Hard Drive (1)
- 500 GB 7200 RPM 2.5" Hard Drive (1)
- 750 GB 7200 RPM Seagate SATA Hard Drive (New) (1)
- 320 GB 5400 RPM 2.5" Hard Drive (1)
- 500 GB SSD Hybrid 2.5" Hard Drive (1)
- 1 TB 5400 RPM 2.5" Hard Drive (1)
- 250 GB SSD (1)
- 500 GB SSD (1)
- Sony PlayStation 3 Slim Hard Drive Tray (1)

Step 1 — Hard Drive




- Turn the PS3 over and lay it on its backside.
- Use the flat edge of a metal spudger to pop up the small access door on the bottom cover near the front of the PS3.
- Remove the blue Phillips screw hidden under the access door.

Step 2



- Slide the hard drive bay cover toward the right side of the lower case, then pull it away from the front edge to remove it from the PS3.

Step 3

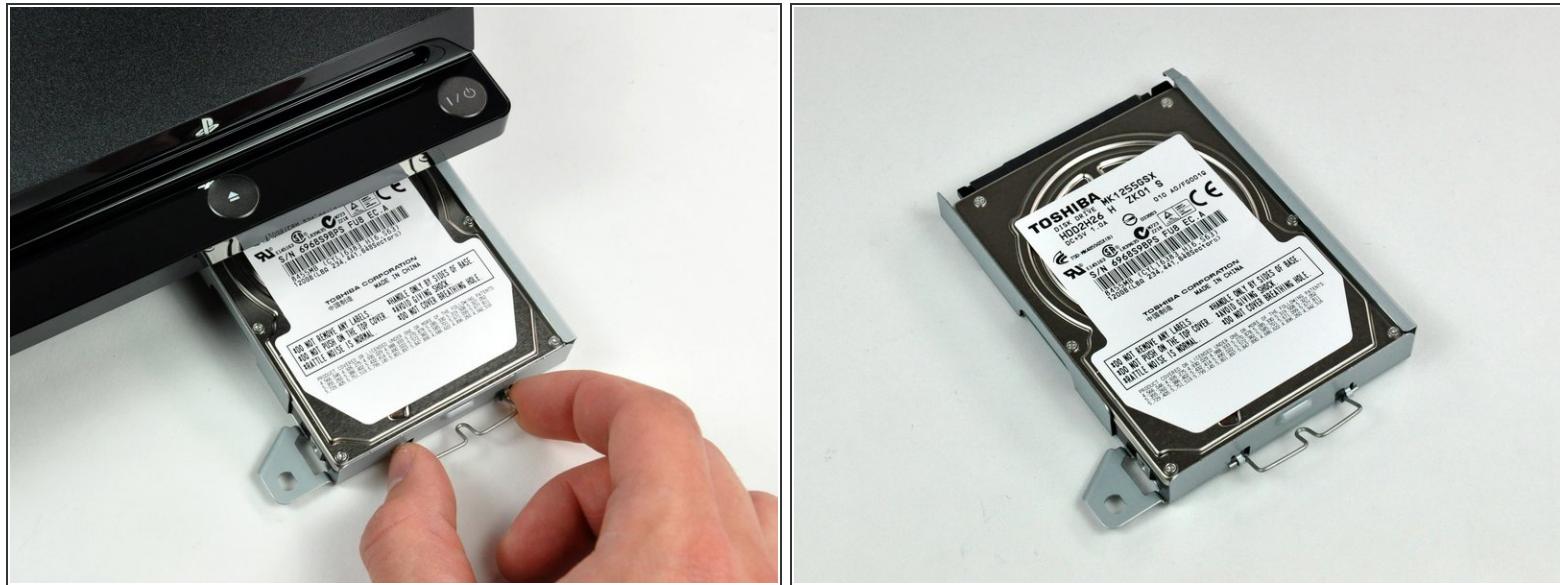

- Using its attached metal handle, pull the hard drive out of its bay.

Step 4 — Hard Drive



- Remove the four 4.3 mm Phillips screws securing the hard drive to its tray.

Step 5



- Remove the hard drive from its tray.

To reassemble your device, follow these instructions in reverse order.