



ProLine HB25 Disassembly

A full disassembly of this product for use as guideline for specific fixes.

Written By: Jorma van Dalen




INTRODUCTION

This guide provides the necessary information on fully disassembling the Proline HB25 hand blender.

TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [Flathead Screwdriver](#) (1)
- [Spanner 3.0 Screwdriver](#) (1)

Step 1 — ProLine HB25 Disassembly

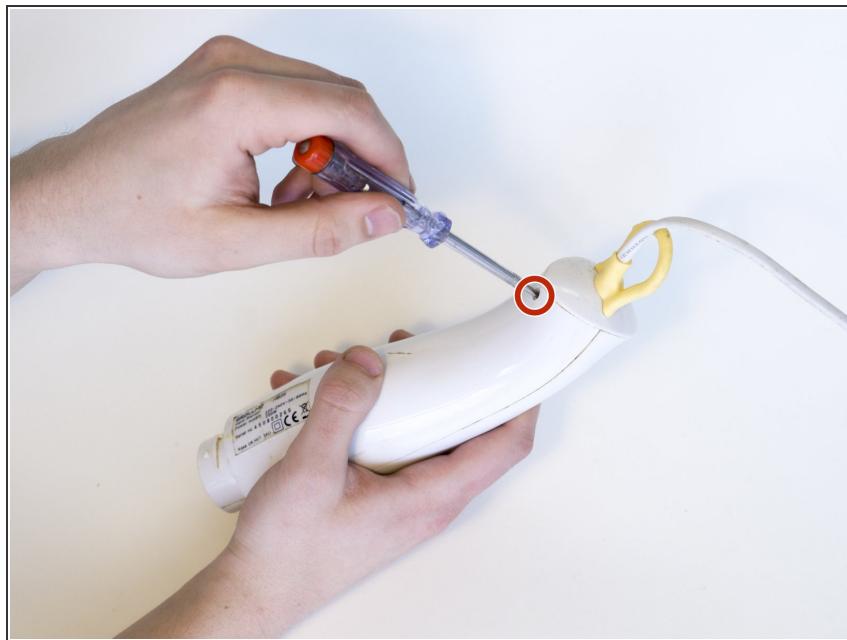


- Unscrew the screw on the back of the product.

Step 2



- Pull out the backtab of the housing.
- Push in the snapfits with, for instance, a screwdriver.

Step 3

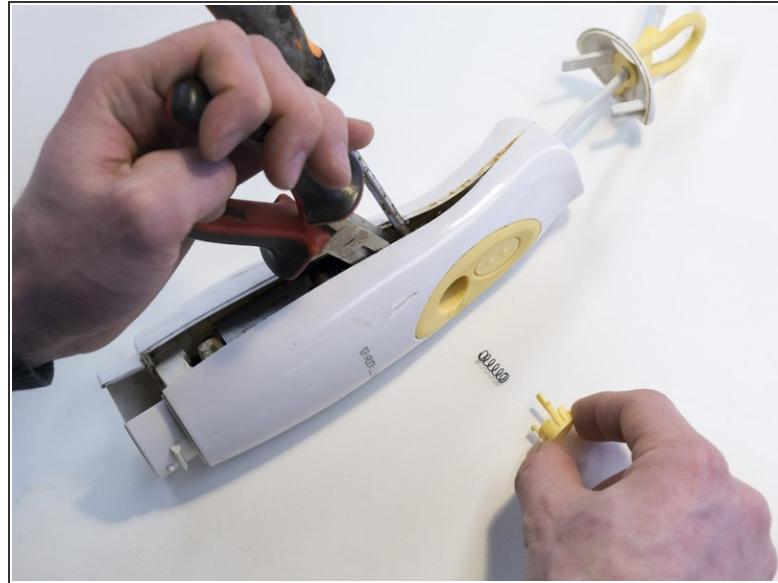

- Separate the housing with calibrated force.

⚠ Keep your fingers away from the housing and do not bend or break the housing.



- Use a flathead screwdriver to push out the lower function button.
- Remove the separating device.

Step 4





- Unscrew the hidden screw under the button.

Step 5

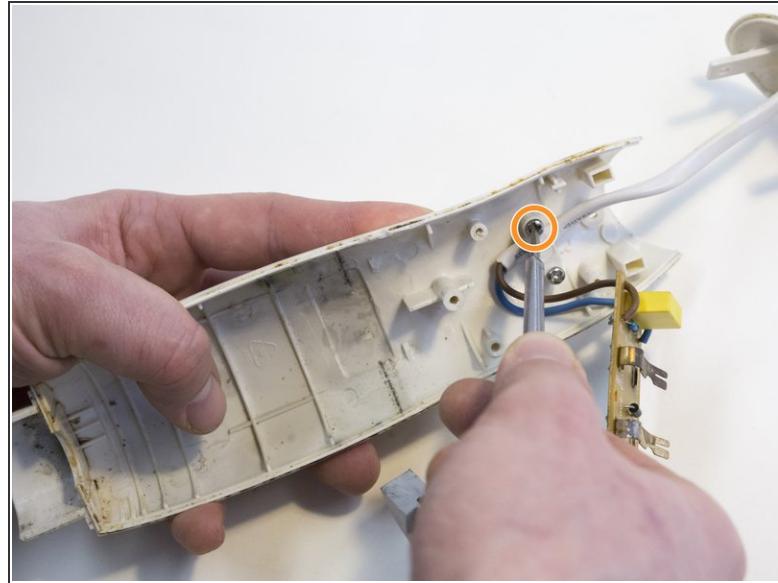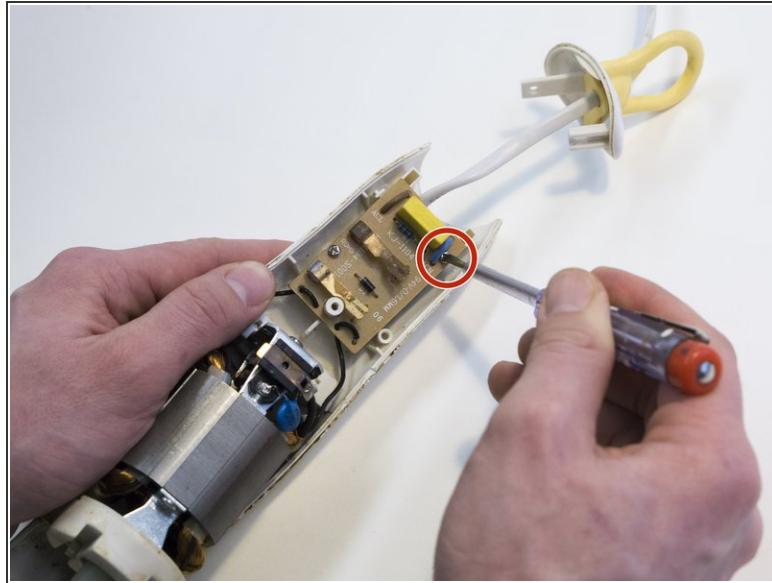



- Open the housing.
- Unscrew the circuit board.
- Unscrew the wire lock.

Step 6

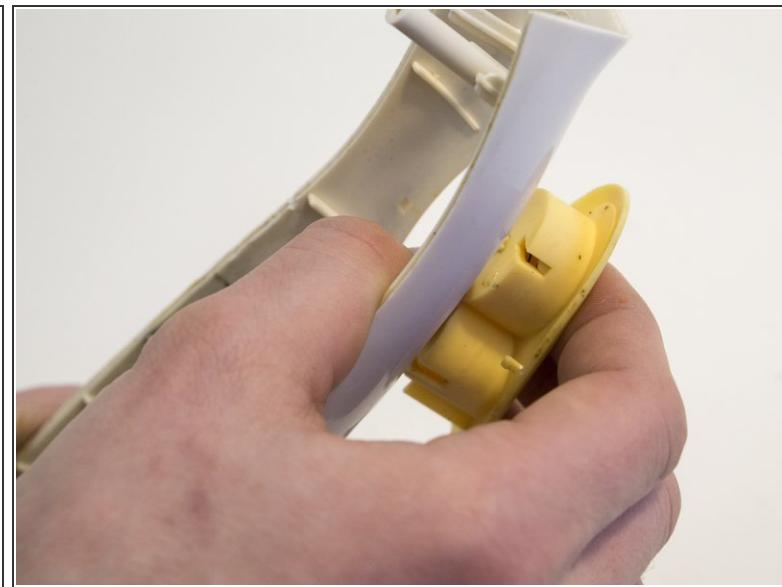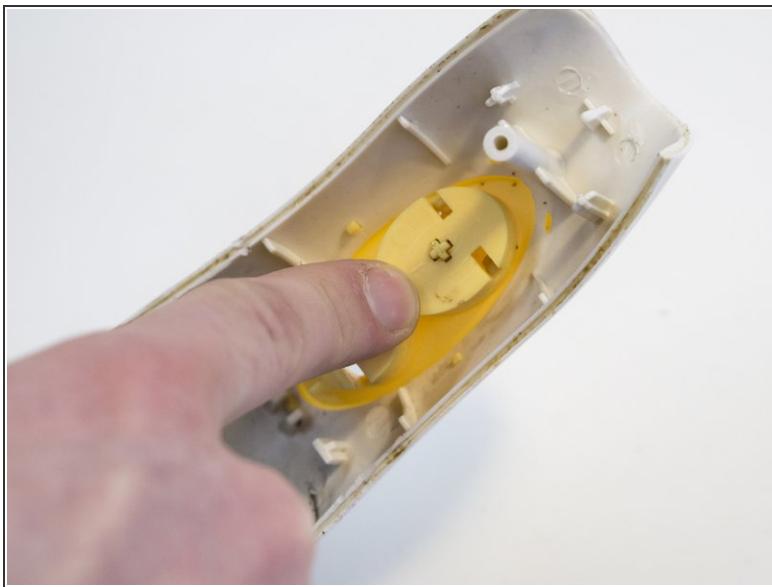

- Push the housing of the button out of the housing.

Step 7

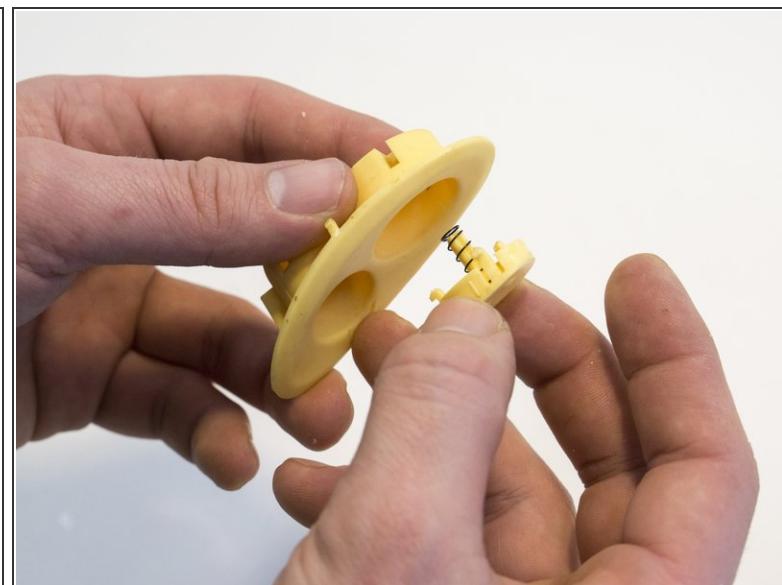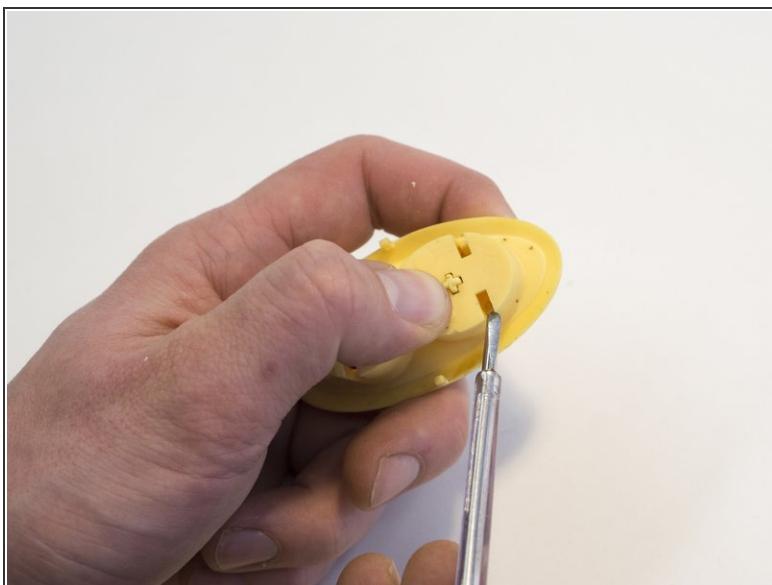

- Push on the side of the housing of the button to push the button out of the housing.

⚠ The spring can jump away when you push out the button.

To reassemble your device, follow these instructions in reverse order.