




# ProScan PLT7223G Speakers Replacement

Replace your malfunctioning speakers to restore sound to your ProScan.

Written By: Laura Kneeshaw

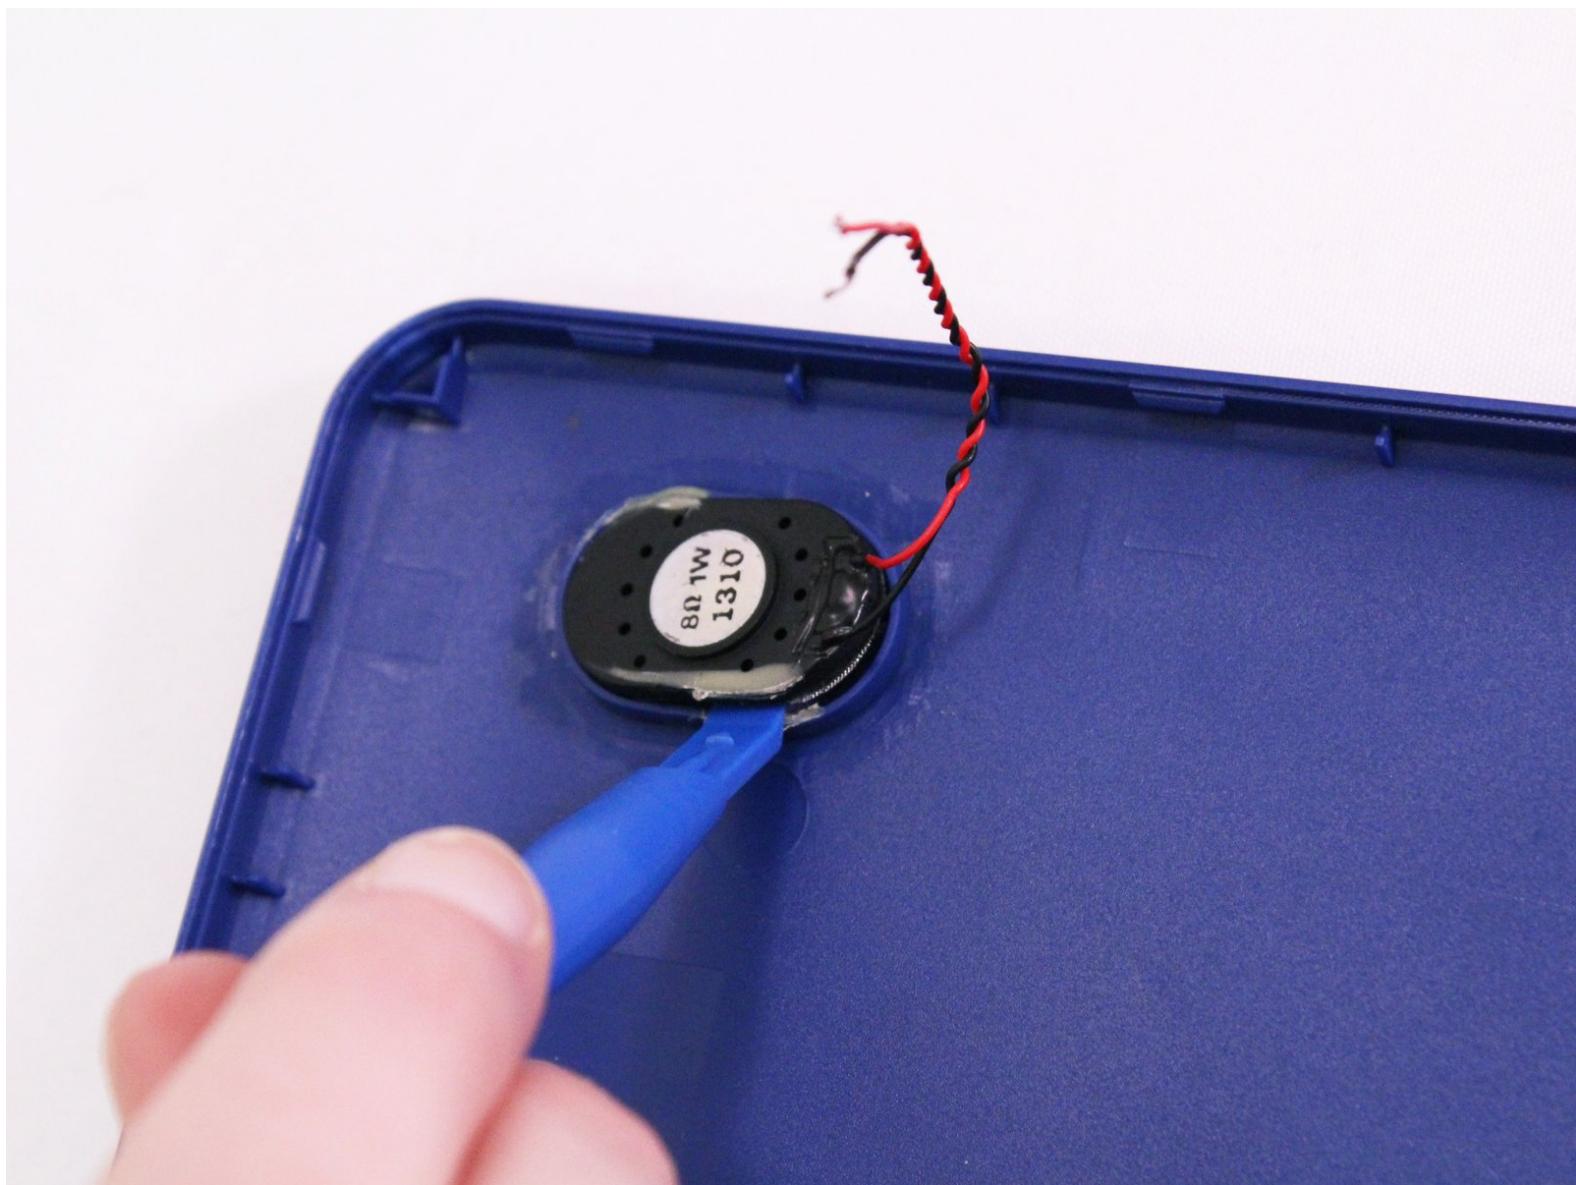

## INTRODUCTION

If your ProScan's audio is not working, use this guide to replace the speakers. This guide will require soldering.

### TOOLS:

- [iFixit Opening Tools](#) (1)
- [Soldering Iron](#) (1)
- [Phillips #00 Screwdriver](#) (1)
- [Tweezers](#) (1)

## Step 1 — Speakers




- Remove both 4 mm screws on the top of the tablet with a PH00 screw driver.

## Step 2




- Use the blue plastic opening tool to pry open the tablet.
- *i* You will hear popping sounds. That's okay.
- ⚠ Be careful when using the blue plastic opening tool on the side of the device near the speakers, as there is a wire here that connects the speakers to the motherboard.

## Step 3

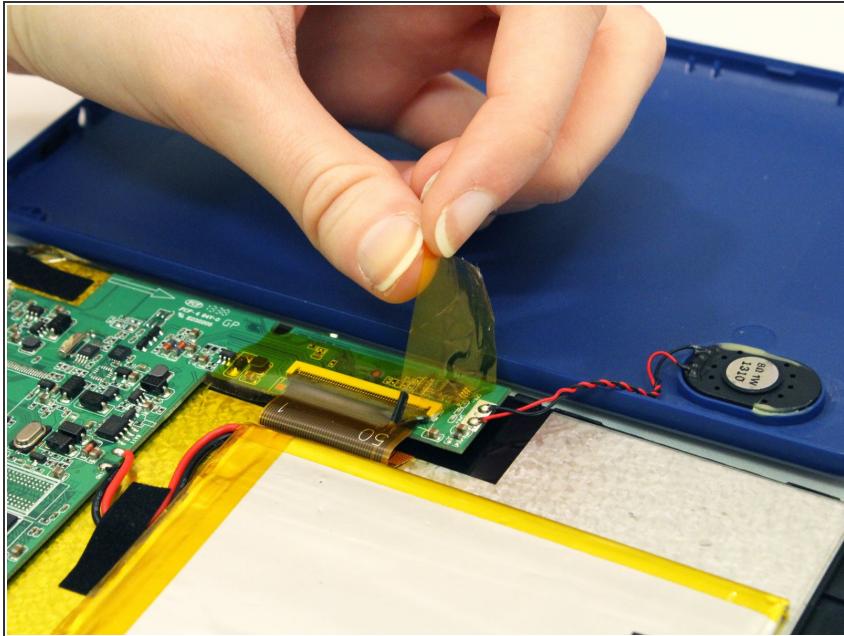

- Pull back the protective tape from the two wires that connect the speakers to the motherboard.


## Step 4

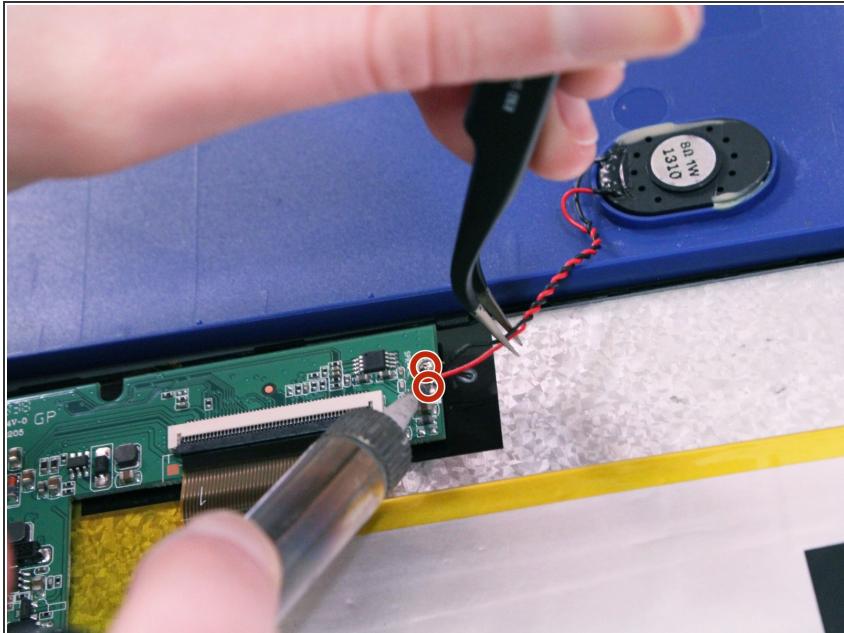

- Use the soldering tool to remove speaker wires from motherboard.

**⚠** Soldering tool will get hot, handle with care.

## Step 5

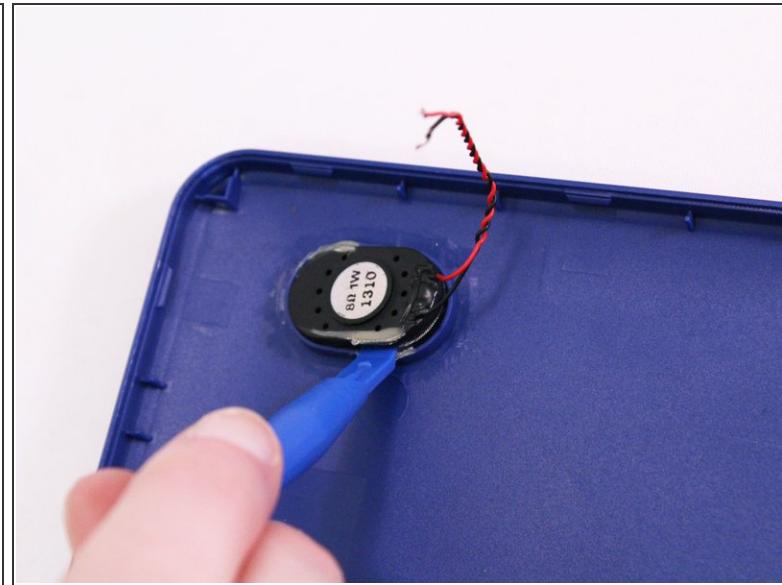

- If needed use a plastic opening tool to remove speaker from the speaker port on the tablet.

To reassemble your device, follow these instructions in reverse order.