




ProTent 2000 Spring in the leg support replacement or readjustment

How to correctly set or re-insert the spring in the support leg of the ProTent 2000.

Written By: Markus Mauchle

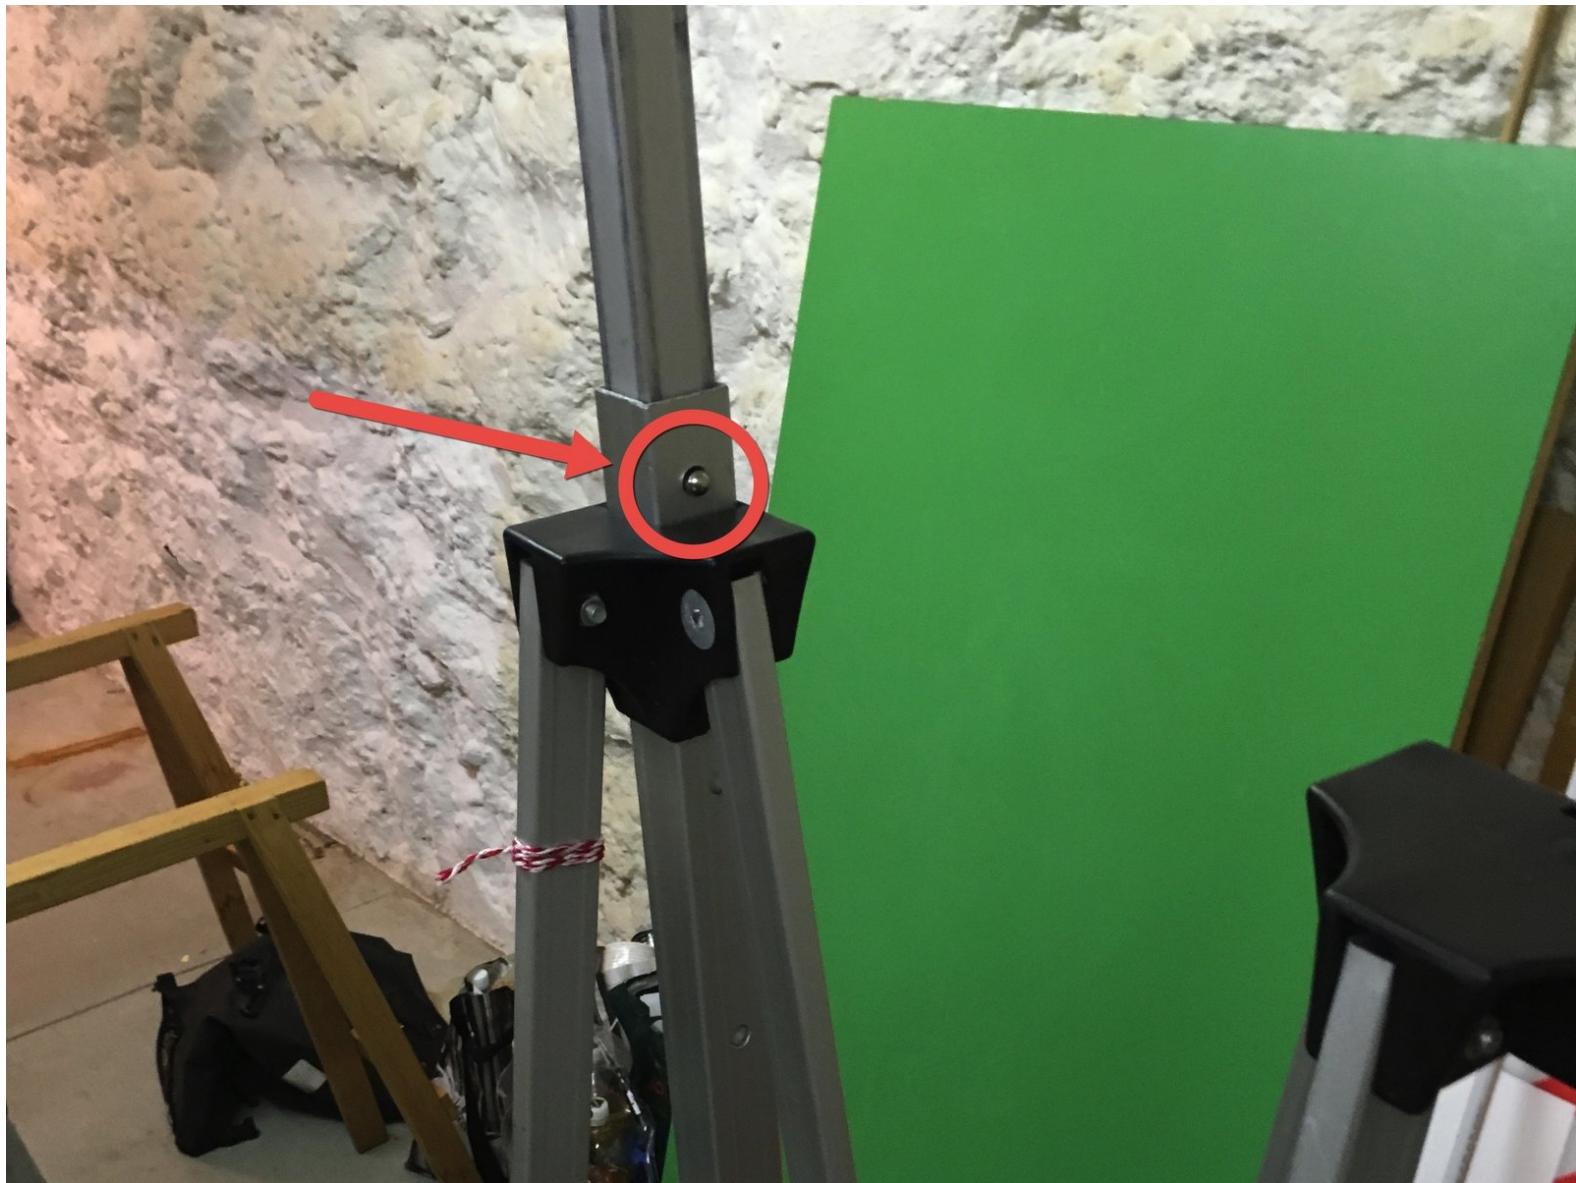

 **TOOLS:**

- [New Item \(1\)](#)

 **PARTS:**


- [New Item \(1\)](#)

Step 1 — Pulling the foot support out of the support leg




- Pull the foot support out of the support leg.

Step 2 — Pushing out a faulty or incorrectly seated spring

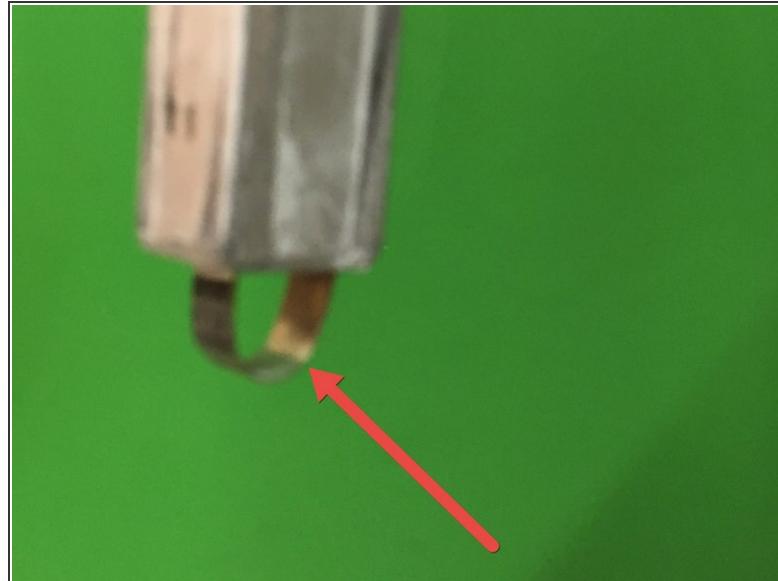



- Use a thin rod (eg a cable tube) to push through the support from the foot side and gently push the spring downwards.
- Pull the spring out of the support leg at the bottom.

Step 3 — Inserting the spring into the support leg

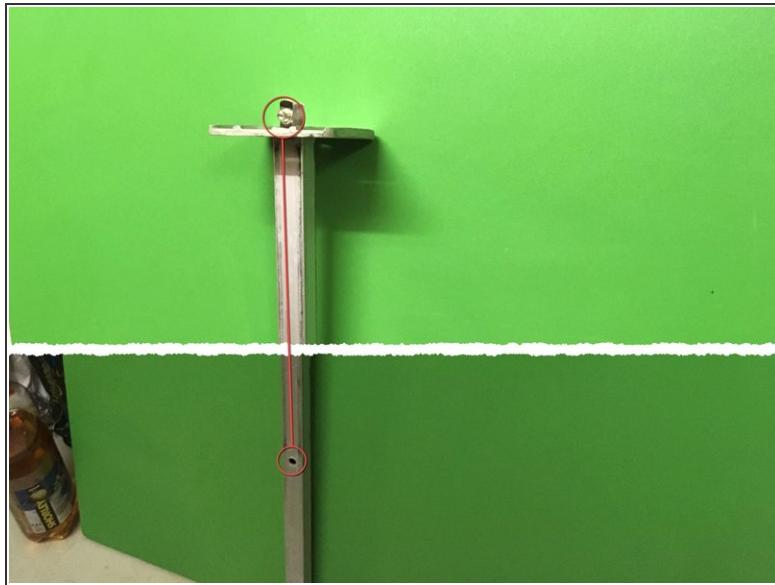


- Insert the spring with the curved side forward from the foot side into the support leg.
- The spring bolt must point to the same side as the hole in the bottom of the foot bar.

Step 4 — Pushing the spring down

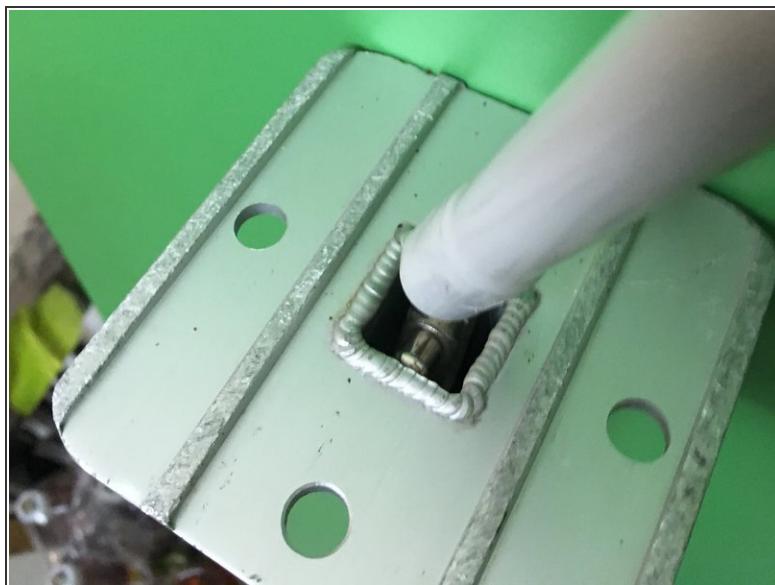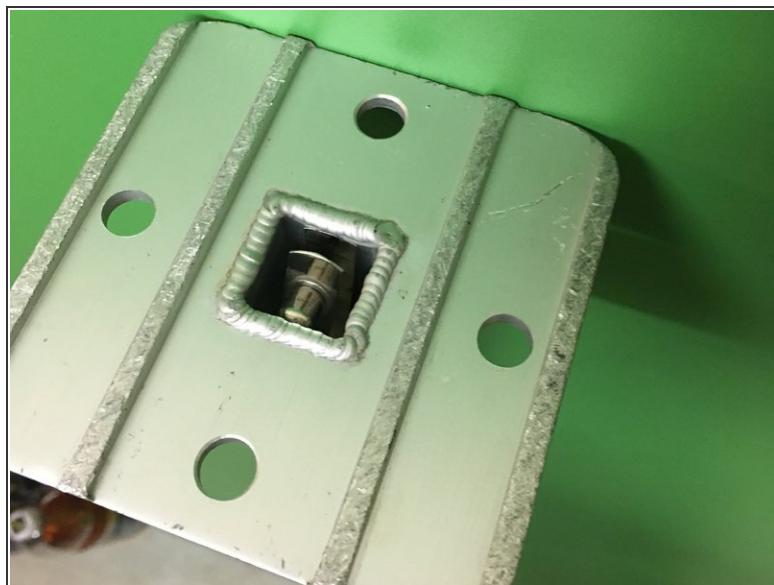

- Push the spring all the way into the foot.
- Then put in the rod again and carefully push the spring downwards.

Step 5 — Placing the spring correctly

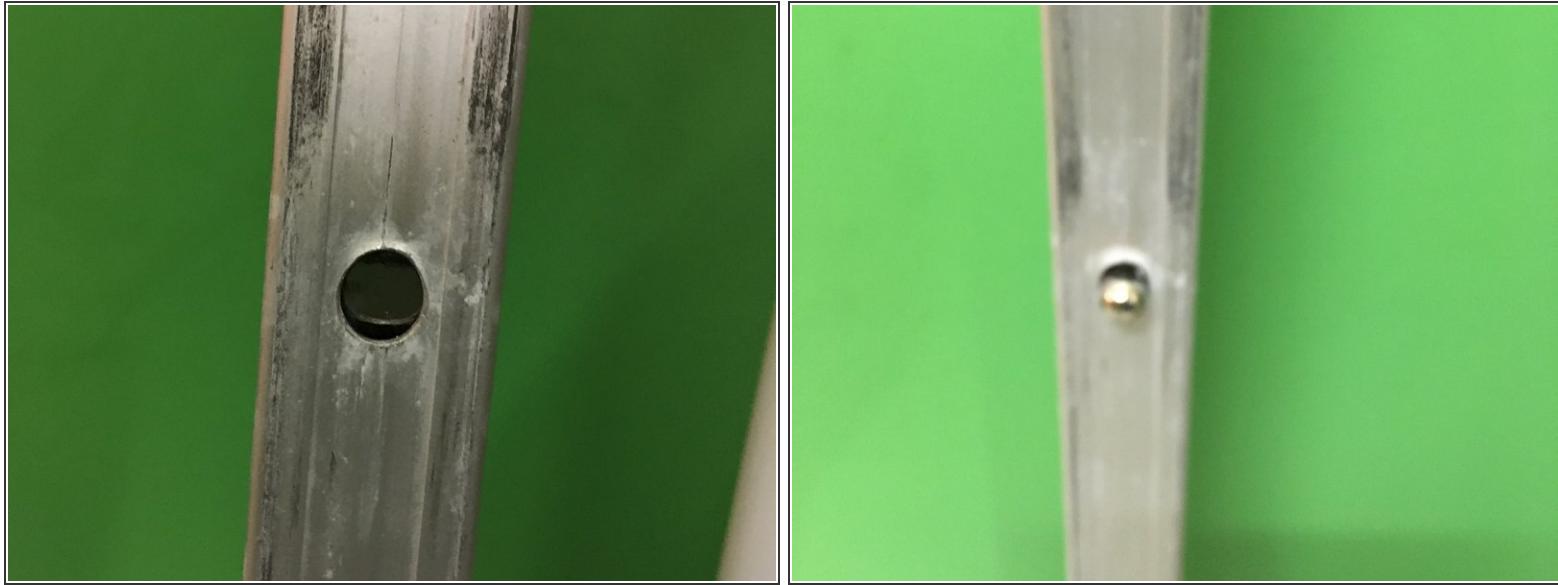

- When the spring appears in the hole, continue to push gently until the bolt pops into the hole.

Step 6



- Now push the foot support back into the support leg.

Congratulations, you did it.