




Propel Gyro-X Outer Shell Replacement

Prerequisite Only

Written By: Ashton Demaree

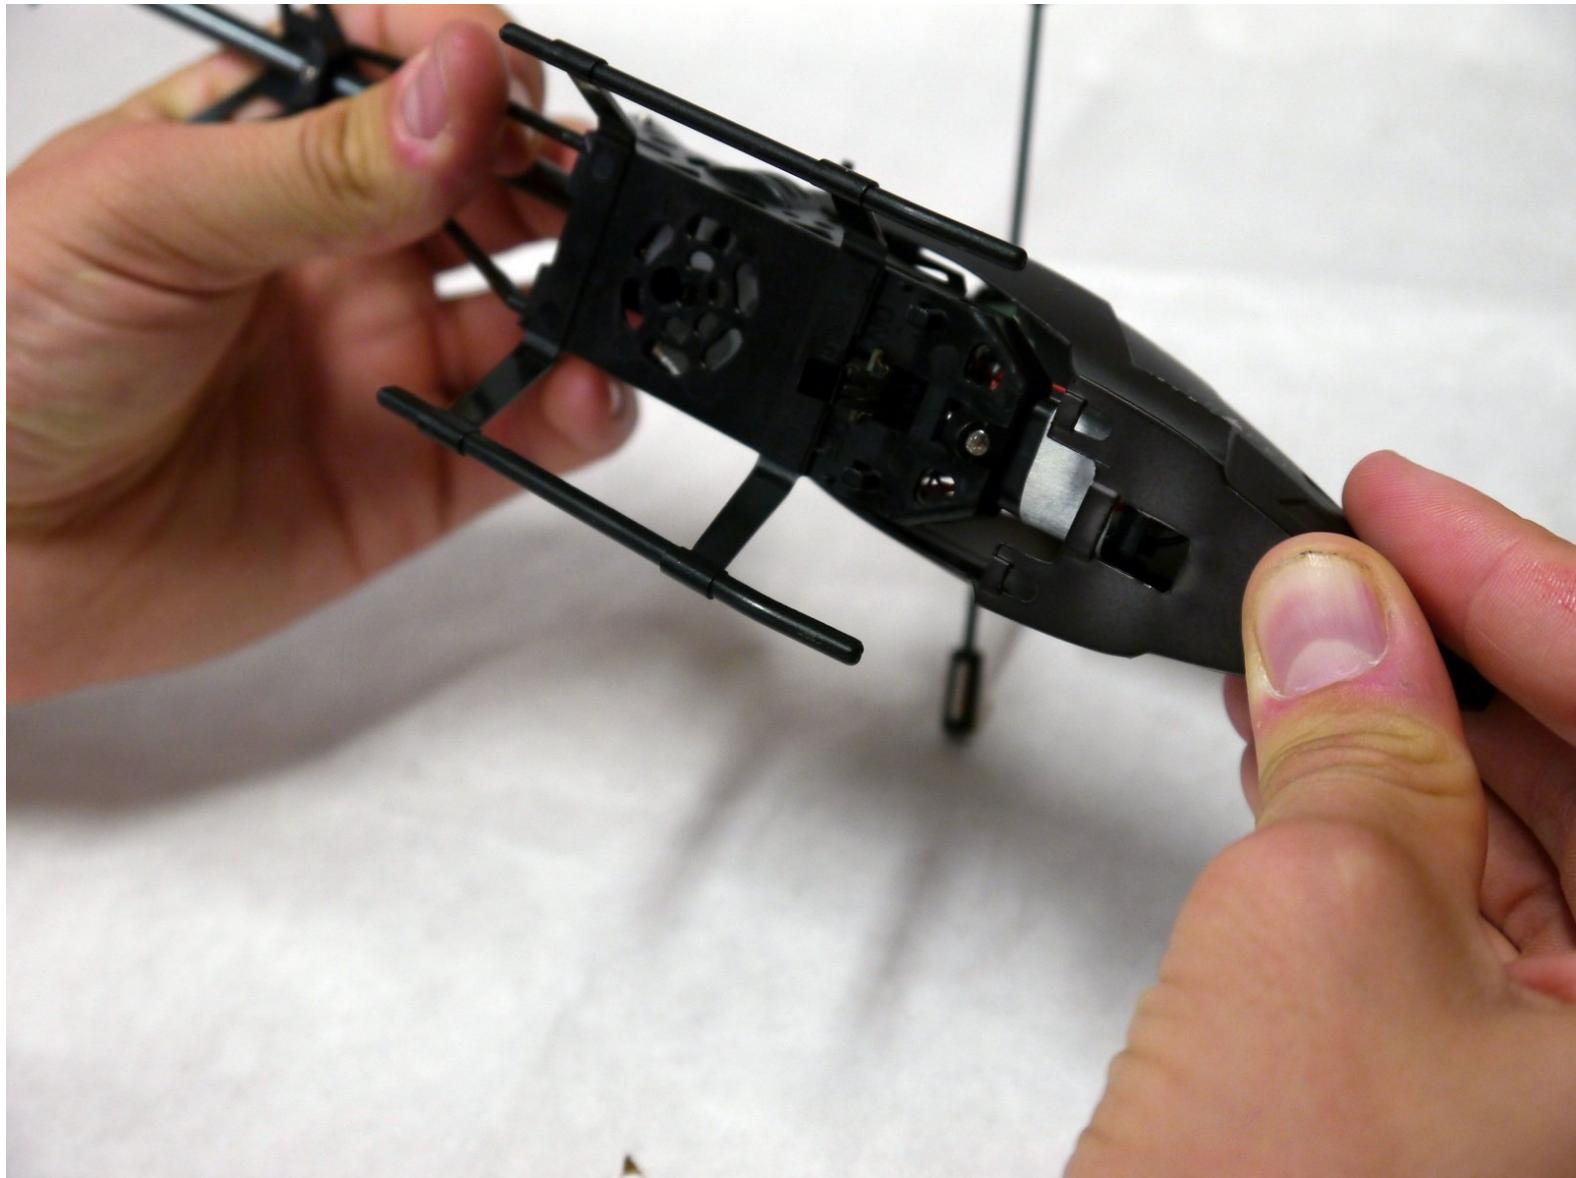

Step 1 — Outer Shell




- Locate the nubs on either side of the helicopter.

Step 2



- Pull the body shell off of the nubs on both sides.

Step 3

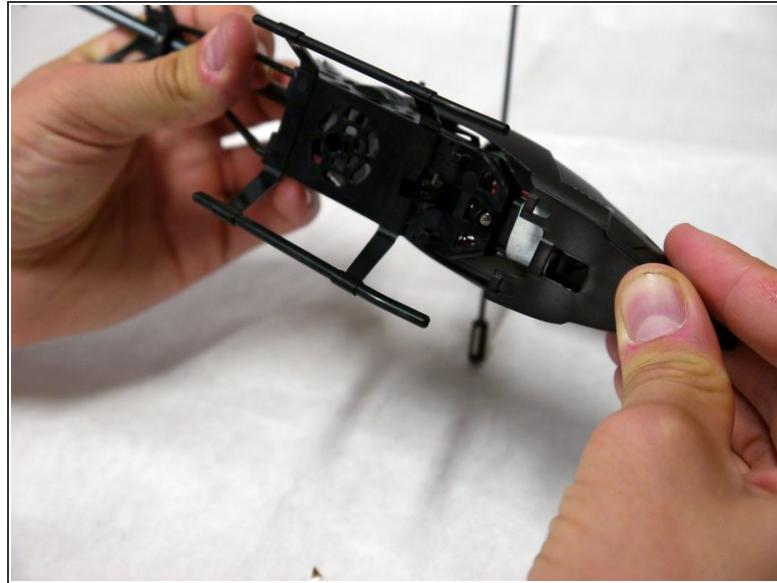

- Push the front of the nose back towards the tail of the helicopter.
- Push down on the shell and pull it away from the body, so that both slots pass over the hooks on the bottom of the helicopter.

To reassemble your device, follow these instructions in reverse order.