



Protocol Galileo Stealth Housing Replacement

Separating the upper and lower housing is a simple two-step process with minimal tools required.
Prerequisite steps are involved.

Written By: Matthew Selting



INTRODUCTION

This guide will walk you through how to separate the upper and lower housing units of the drone. Minimal tooling is required; however, prerequisite steps are required. This guide is useful for accessing internal components of the drone.

TOOLS:

- Phillips #000 Screwdriver (1)

Step 1 — Propeller



- Remove the chrome shaft cover by lightly pulling it away from the drone.

Step 2



- Using a Phillips #000 screwdriver, remove the 7mm screw from the propeller stop.

⚠ Be sure to apply adequate pressure when removing the screw to prevent stripping it out.

Step 3




- Remove the propeller stop from shaft by lightly pulling it away from the drone.

Step 4




- Remove the propeller from shaft by lightly pulling it away from the drone.

Step 5 — Housing

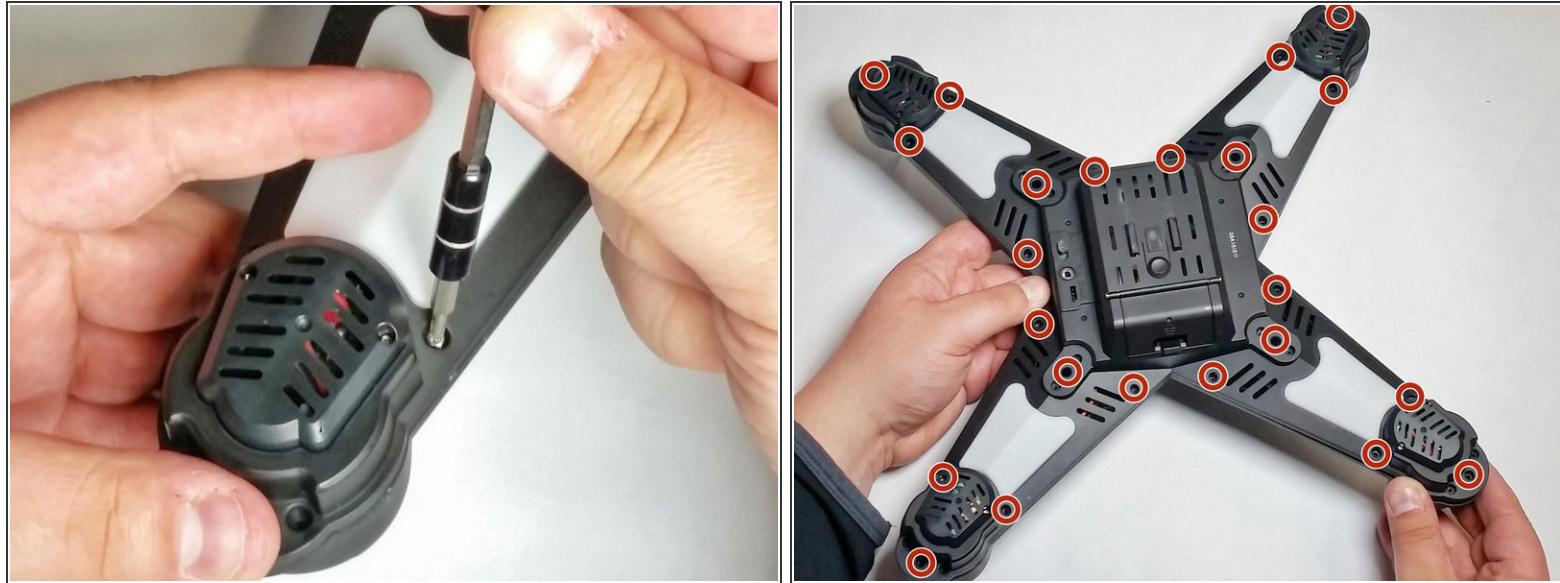

- Remove the 8mm long Phillips #0 screws (24 total) from the lower housing unit.
- ☒ Take care to place the screws in a safe place to prevent losing them.

Step 6

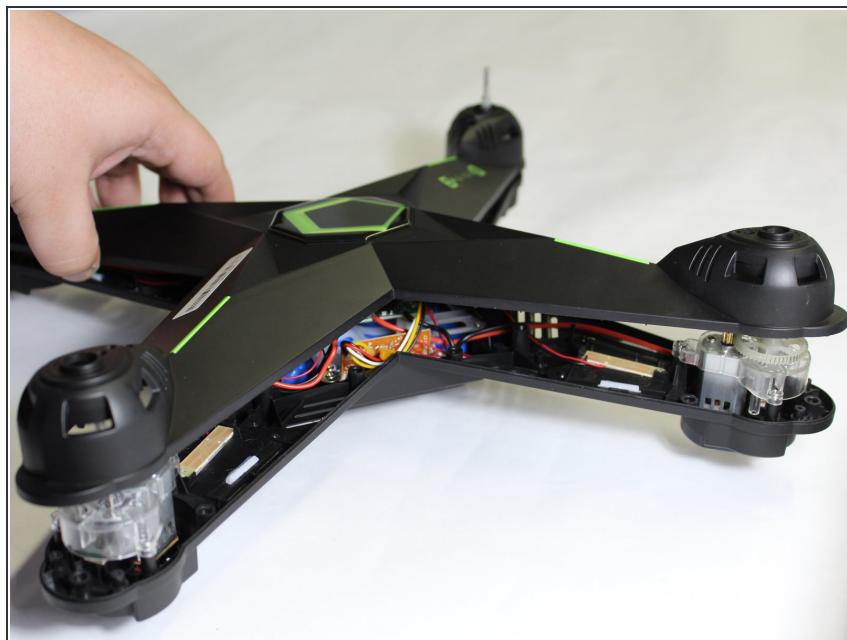

- Separate the upper and lower housing units by lightly pulling the two housing units apart.

To reassemble your device, follow these instructions in reverse order.