



QFX IT-437 Battery Replacement

This is a step-by-step guide on how to replace the battery in the QFX IT-437 tablet.

Written By: Douglas



 **TOOLS:**


- [iFixit Opening Tools \(1\)](#)
- [Phillips #00 Screwdriver \(1\)](#)
- [iFixit Opening Picks set of 6 \(1\)](#)

Step 1 — Battery



- Begin the process by using a PH00 Phillips screw driver.
- Remove the two 1.2mm x 3mm screws at the bottom of the tablet.


Step 2

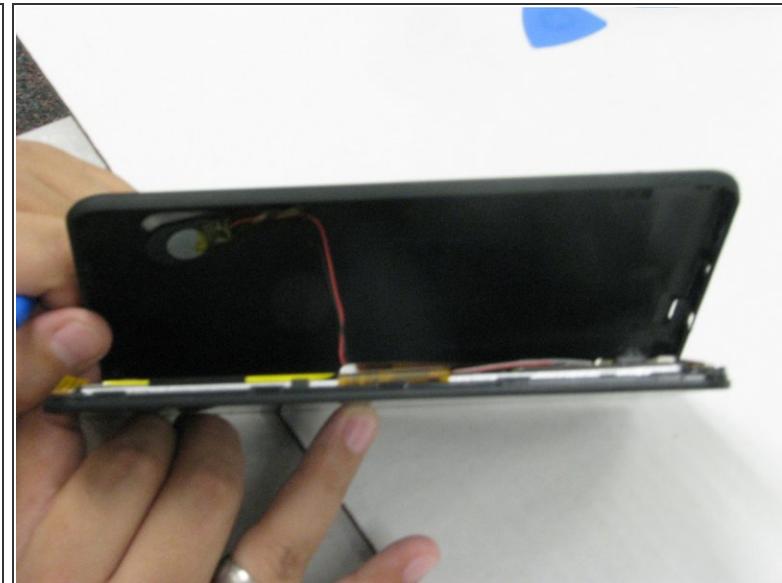

- Use the iFixit plastic opening tool to pry open the back of the tablet.

⚠ Do not remove the back case completely as tape has to be removed from the wires, and pulling the case apart can tear off the wires.

Step 3

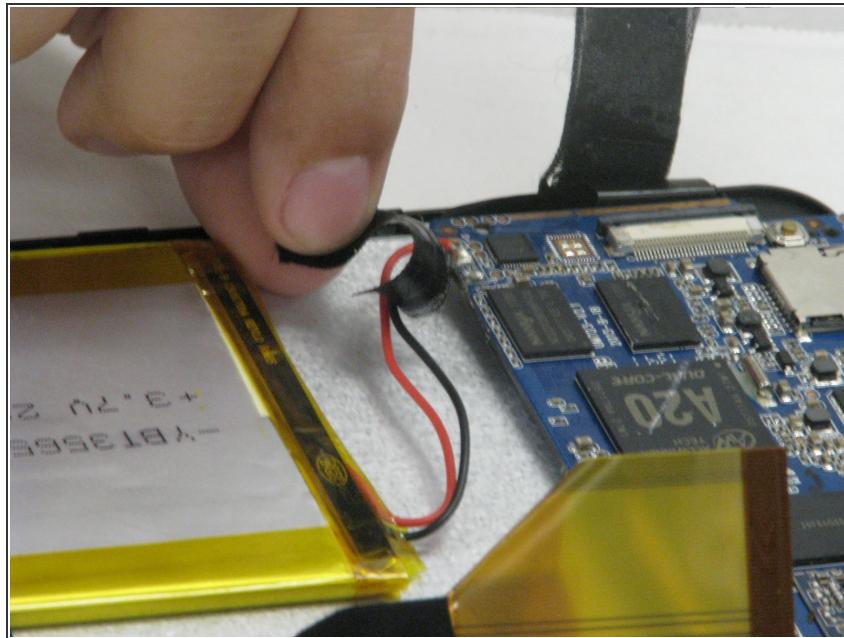

- Remove the tape connecting the battery to the motherboard.


i Save the tape in good condition for the replacement so the wires do not get stuck in the case.

Step 4



- Remove the black tape attaching the wires to the battery.

Step 5

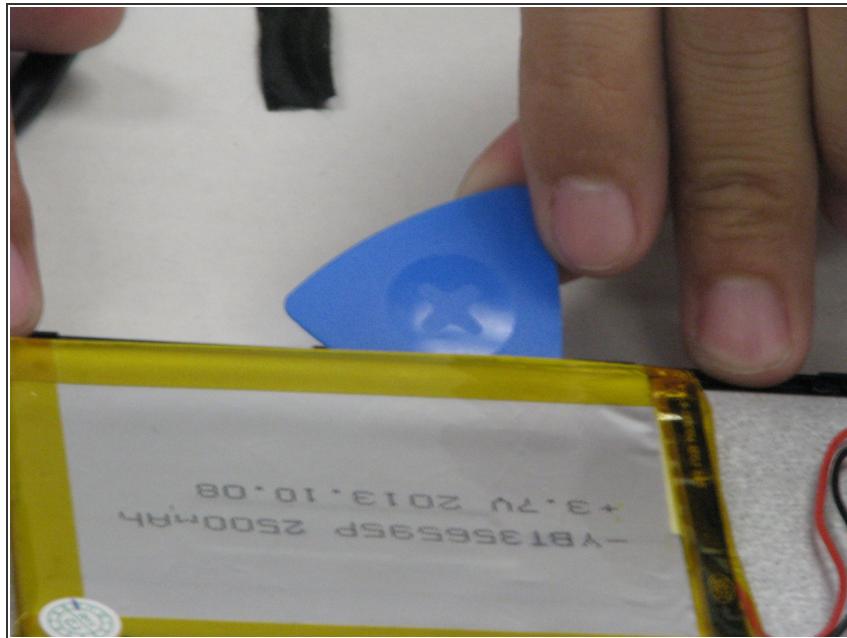

- Use the plastic opening pick in order to remove the battery from the tablet, and set it aside for the replacement.
- ☒ The removed wires will have to be soldered back on to the motherboard.

To reassemble your device, follow these instructions in reverse order.