




Qualcomm Snapdragon 800 Mobile Development Antenna Replacement

Use this guide to replace the Qualcomm Snapdragon 800 Mobile Development Tablet's antennas.

Written By: Omar

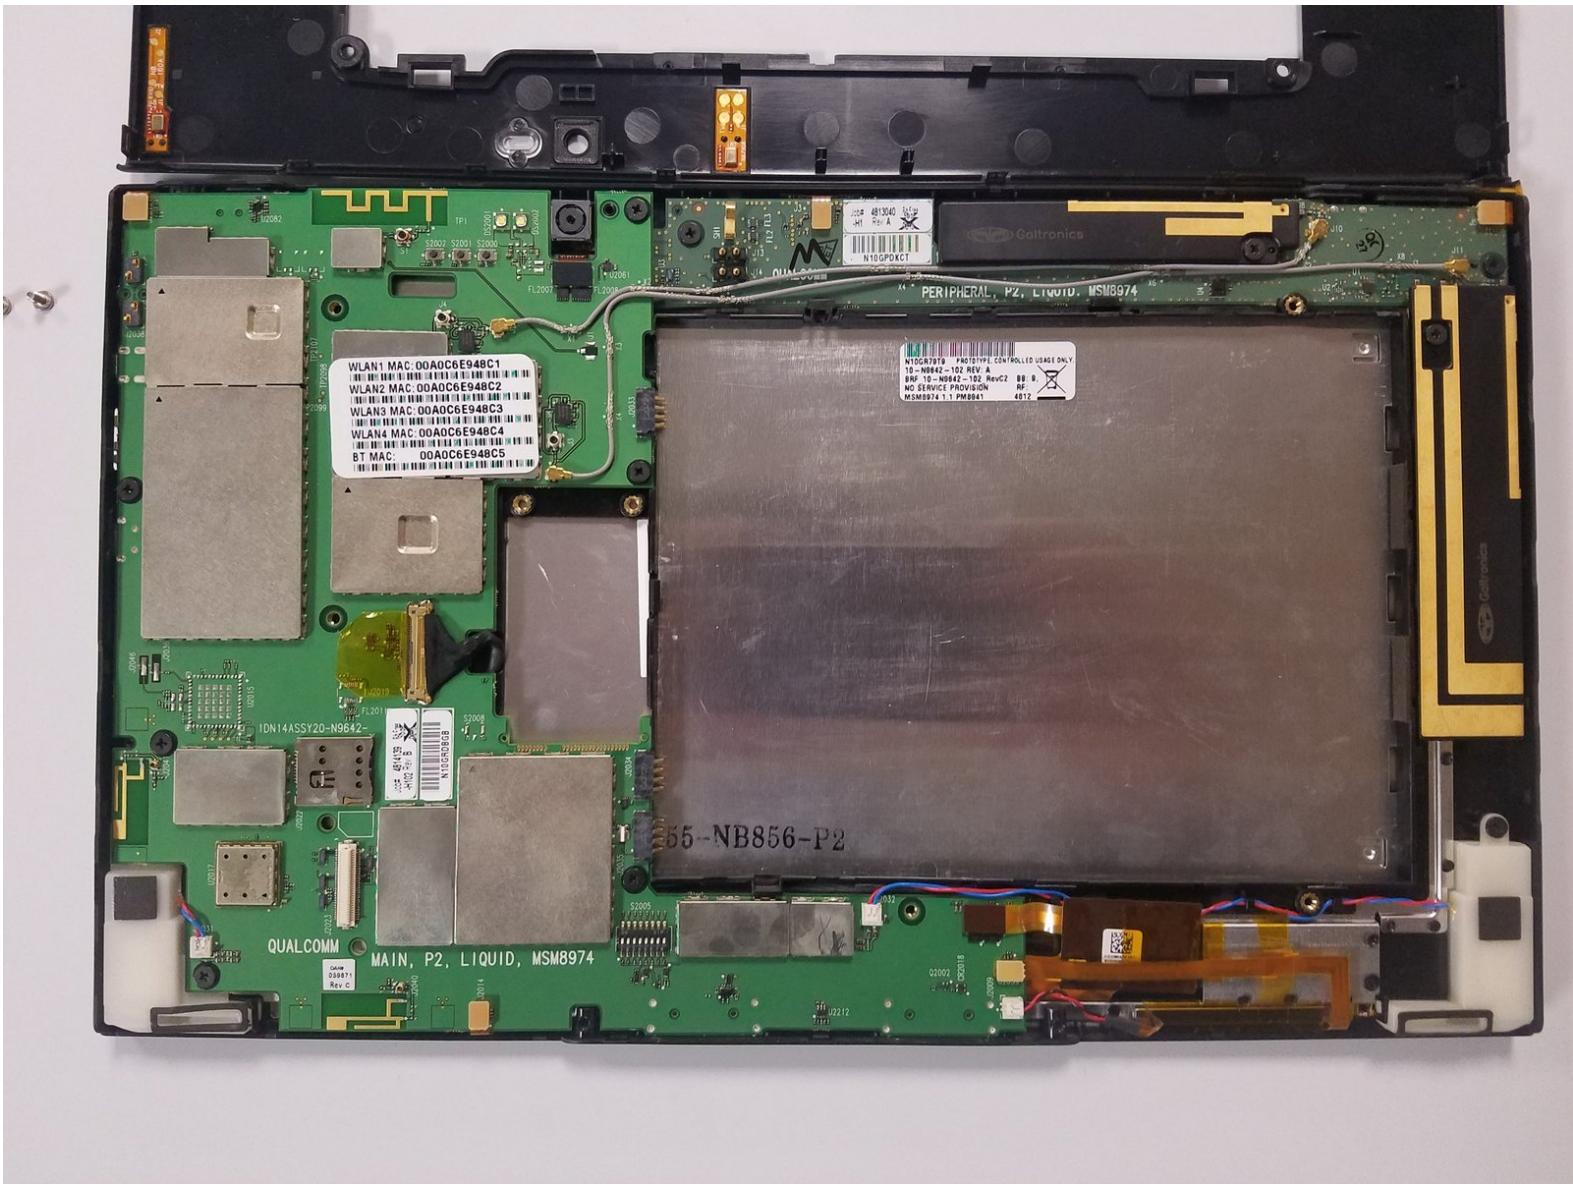

 **TOOLS:**

- **Spudger (1)**
- **Phillips Head Screwdriver: Size PH1 (1)**

Step 1 — Battery




- Locate your device.
- Flip device onto its back.

Step 2




- Remove the tablet's back cover.

Step 3

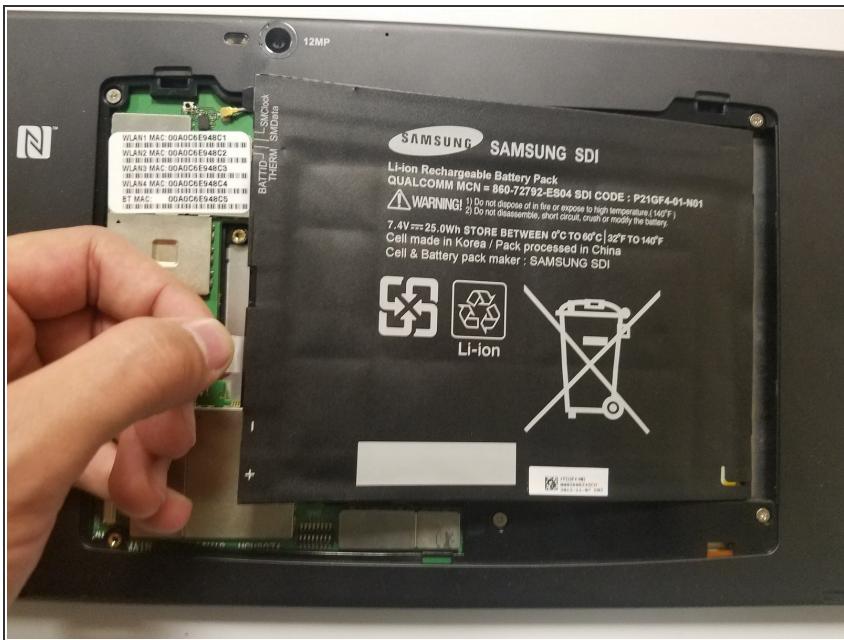

- Locate the battery and remove it.
- If you wish to replace the battery you can do so here.

Step 4 — Back Panel

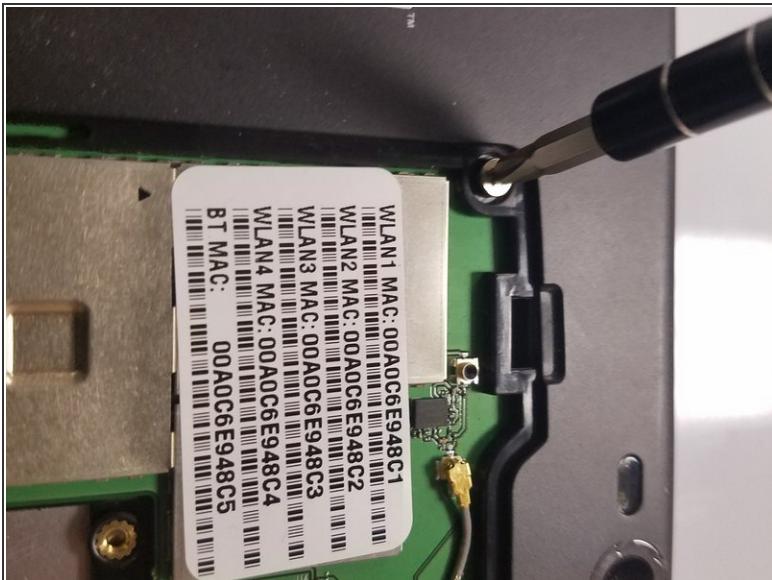

- Use the Phillips PH1 screwdriver to unscrew the five 4x2.5mm screws that hold the back cover.

Step 5



- Pop out the back cover.

Step 6 — Antennas



- After removing the panel and the battery, your tablet should look like this.

Step 7



- Locate the tablet's antennas.
- Remove the two 3x2.5mm screws holding them down.

Step 8



- Remove antennas and replace them as needed.

To reassemble your device, follow these instructions in reverse order.