



RCA RCT6203W46 Rear Speaker Replacement

This guide replaces a damaged or dysfunctional rear speaker.

Written By: Nicholas Alexander



INTRODUCTION

In order to reach the rear speaker, the back of the tablet must be removed. This guide requires basic knowledge of soldering.

TOOLS:

- [Spudger \(1\)](#)
- [Soldering Iron \(1\)](#)
- [Phillips #00 Screwdriver \(1\)](#)
- [Metal Spudger \(1\)](#)

Step 1 — Rear Speaker



- Remove these four 4 mm Phillips #00 screws.


Step 2



- Run a spudger tool around the edge of the screen to loosen it and begin to pry upward.
- The screen will be able to be removed once you see it pop up like it has in the photo.

ⓘ There are wires attached to the back cover and screen so be careful not to pull them apart.

Step 3

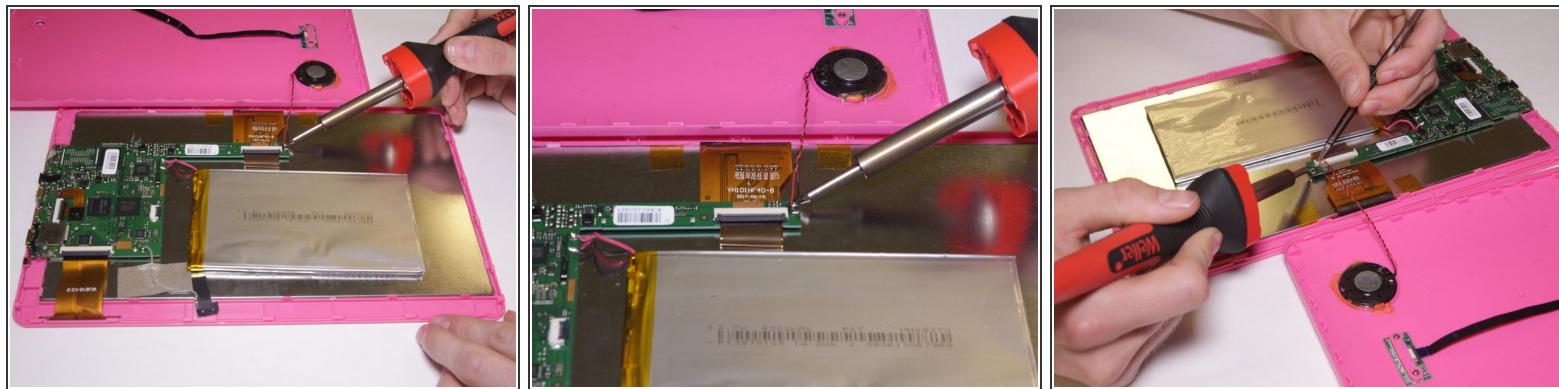

- With a soldering iron, remove the wires from the circuit board.
- i* Due to the size of the wires, tweezers may be necessary.

Step 4



- Use a metal spudger to pry out the speakers from its housing.

To reassemble your device, follow these instructions in reverse order.