



Razer Blade 14" (2013) Battery Replacement

Replace your dead battery in only a few steps!

Written By: tallme15



INTRODUCTION

I Intend to show you how to safely remove the battery.

TOOLS:

- [T5 Torx Screwdriver](#) (1)
- [Spudger](#) (1)
- [Tweezers](#) (1)
- [Phillips #1 Screwdriver](#) (1)

Step 1 — Remove the back cover




- Remove all 10 Torx T5 Screws

Step 2 — Disconnect the keyboard cables




- Flip the hold down up
- Remove the cable
- Repeat for second cable

Step 3 — Remove Touchpad cable

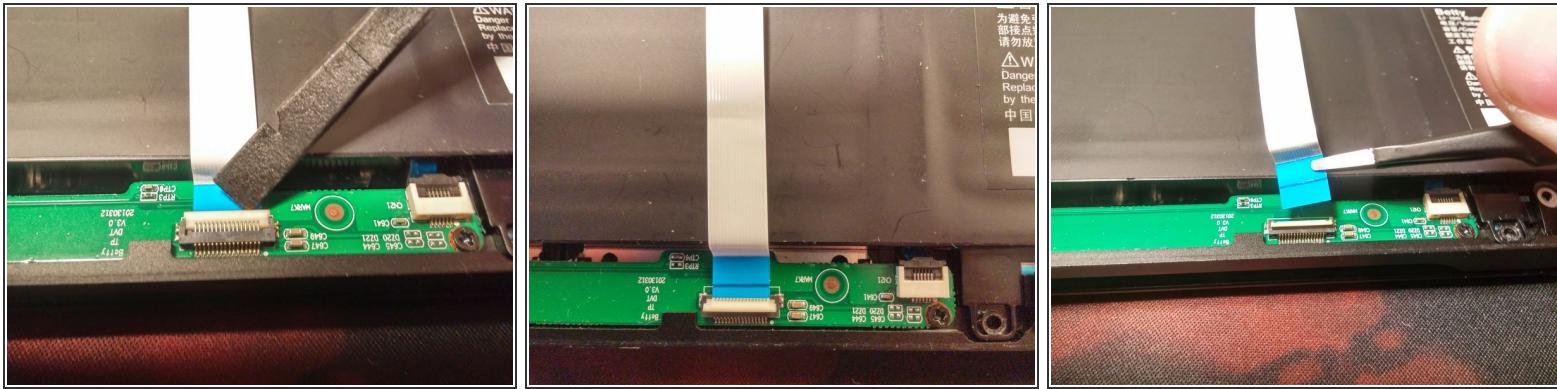

- Unclip hold-down
- Remove cable

Step 4 — Disconnect Battery

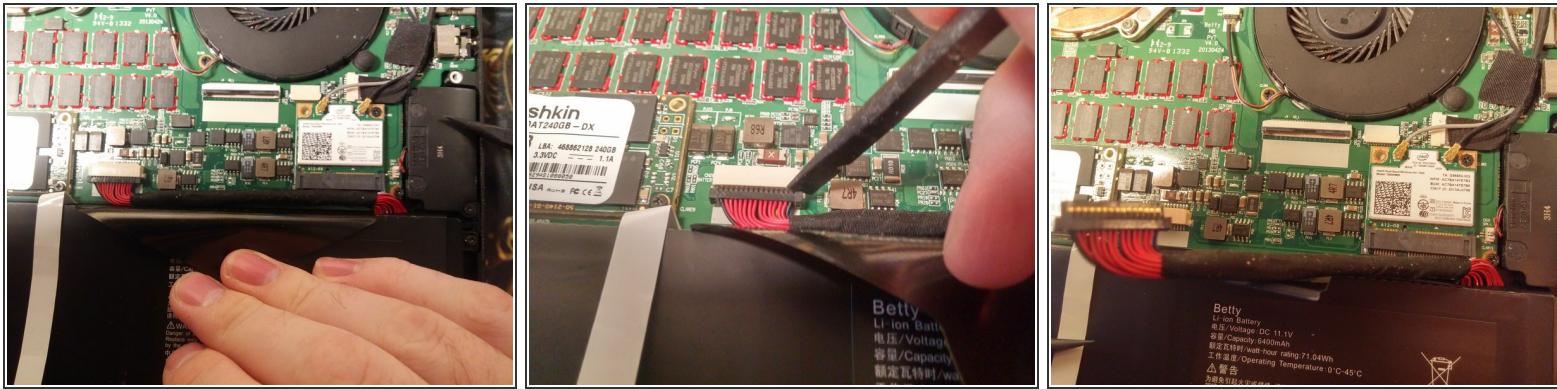

- Use a spudger to disconnect the plug from the connector by pulling it away from the socket, parallel to the board.
- Bend the connector backwards to prevent it from getting in the way of the motherboard.

Step 5 — Remove Battery Screws



- Remove the 7 battery screws

Step 6 — Remove the Battery



- Remove the battery by pulling up from the side closest to the motherboard
- ⚠ Be careful of the other cables and the battery cable
- ⓘ You will have to lift up just a bit, then slide forward to clear one cable and the back cover screws

To reassemble your device, follow these instructions in reverse order.