



Razer Blade RZ09-0102 Battery Replacement

This guide will show you how to remove and replace a faulty battery for the Razer Blade RZ09-0102.

Written By: Nicole Schukow



INTRODUCTION

A guide to remove and replace the battery for the Razer Blade RZ09-0102. You may want to replace your battery if the battery cannot hold a charge or drains after an unreasonably short time. The battery needs to be removed if working on other components as well. Please make sure the battery is completely drained of charge before starting this guide.

TOOLS:



- [T5 Torx Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)
- [Phillips #0 Screwdriver](#) (1)

Step 1 — Rear Panel



- Using a Torx T5 screwdriver, remove the ten 1/8 inch screws.

Step 2 — Battery

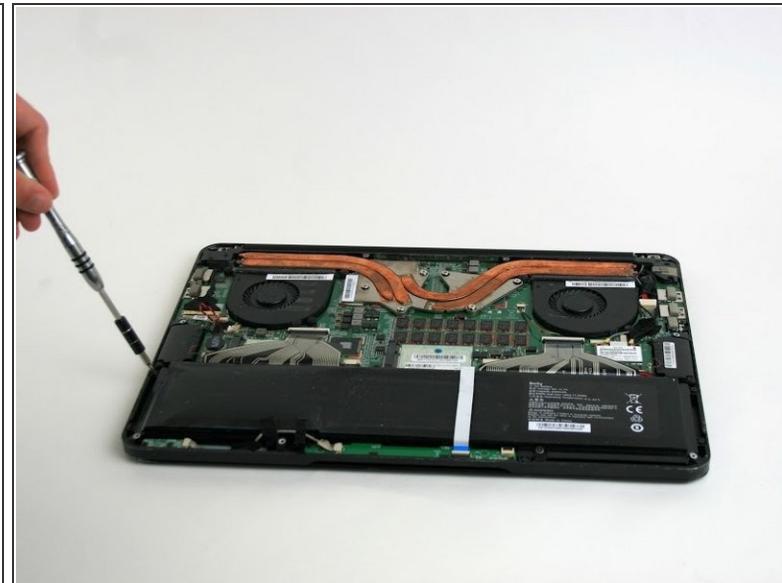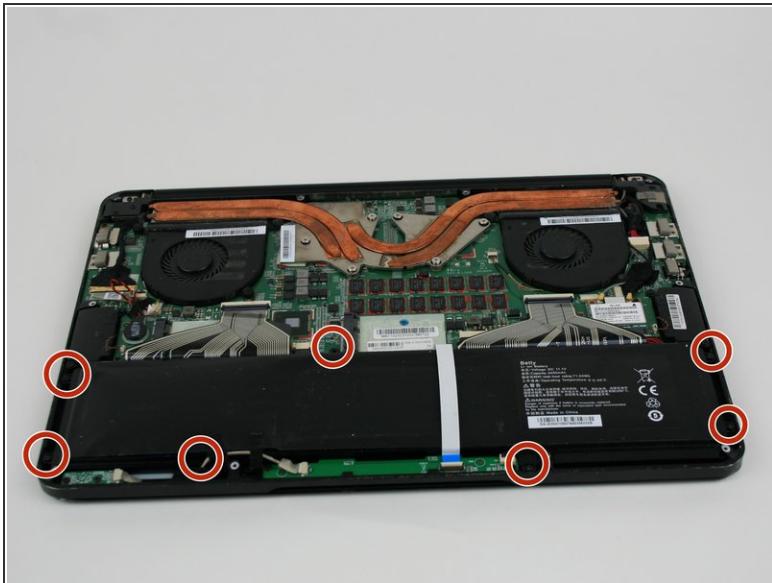


- Remove the eight screws holding the battery in place using a Phillips #0 screwdriver.

Step 3





- Using a plastic opening tool, lift up on the two white connectors holding the black ribbon cables that come from under the battery.

Step 4

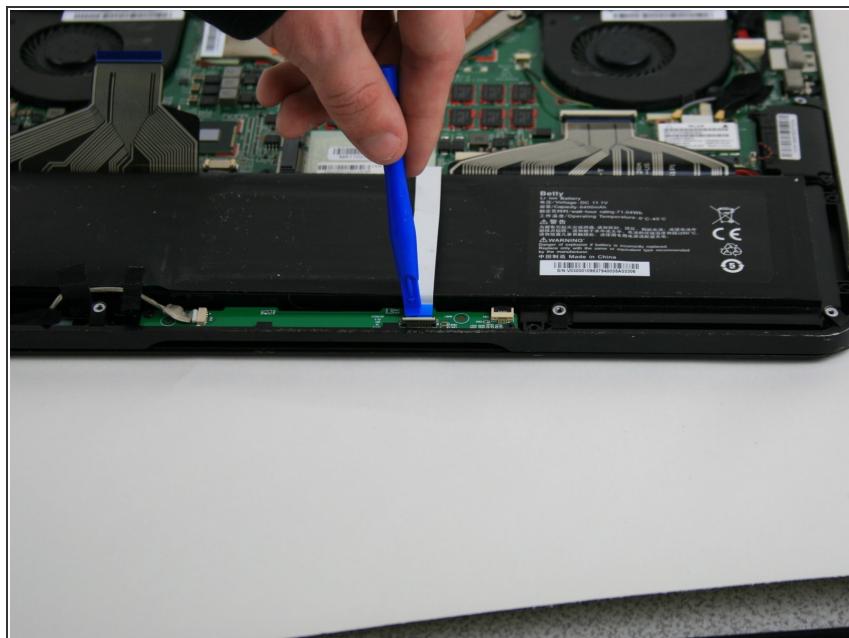



- Using the opening tool pry up the white clip holding down the white ribbon that goes over the top of the battery.

Step 5

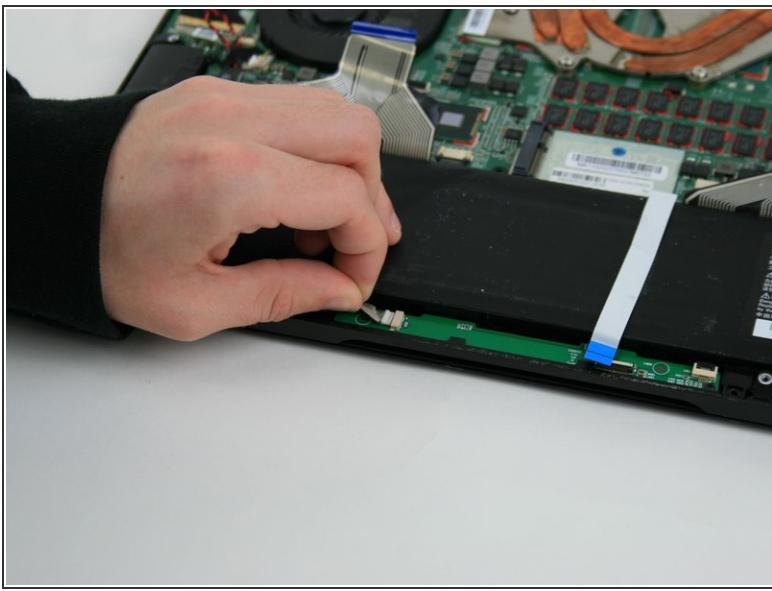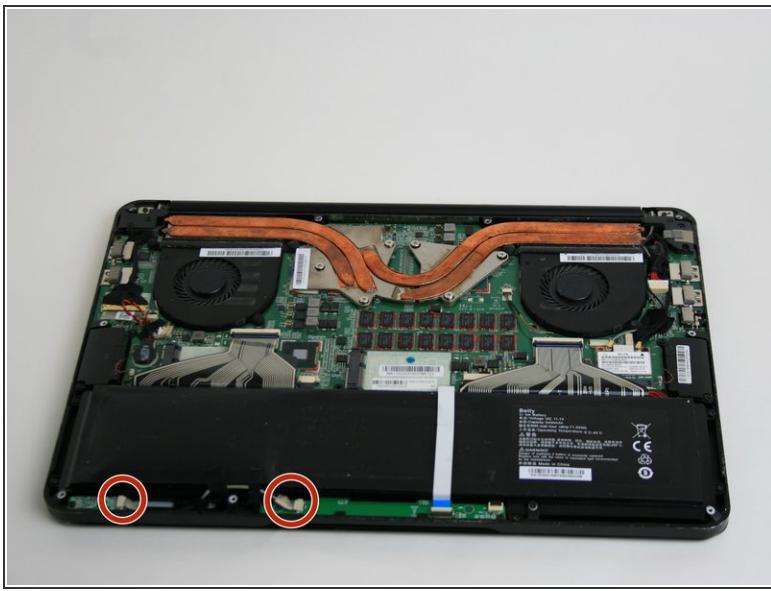

- Using your fingers, pry out the two wires that connect the battery to the front part of the motherboard.

Step 6

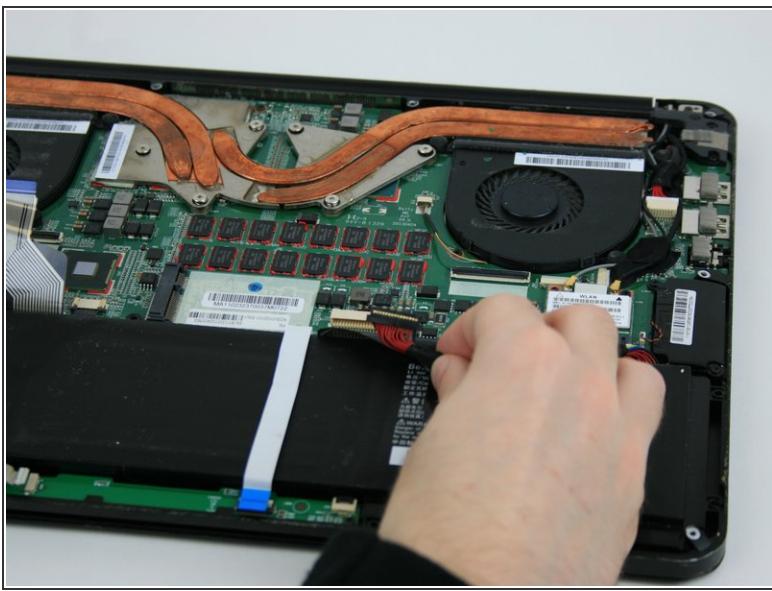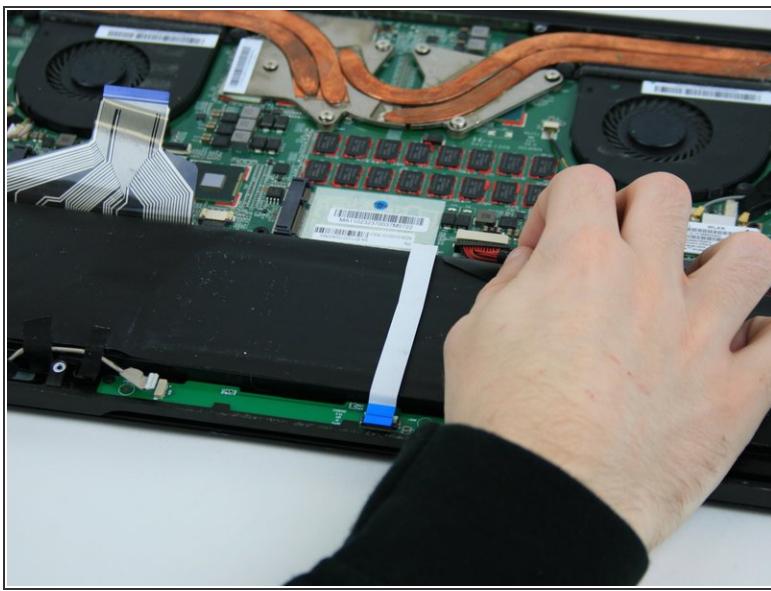

- Using your fingers, disconnect the red and black wire connecting the battery to the motherboard located underneath the black and white ribbon.

Step 7



- Remove the battery from the laptop.

To reassemble your device, follow these instructions in reverse order.