



Rear Case Replacement

Instructions for accessing the internal components of the Alpha A3000.

Written By: Leonard Holloman



INTRODUCTION

This is a guide for accessing the internal workings of the camera. Before following these instructions make sure the proper replacement parts are available.

TOOLS:

- [Phillips #000 Screwdriver](#) (1)
- [Tweezers](#) (1)


Step 1 — Rear Case



- Remove the seven highlighted screws shown here.

 Screws are teeny tiny, don't lose them!



Step 2

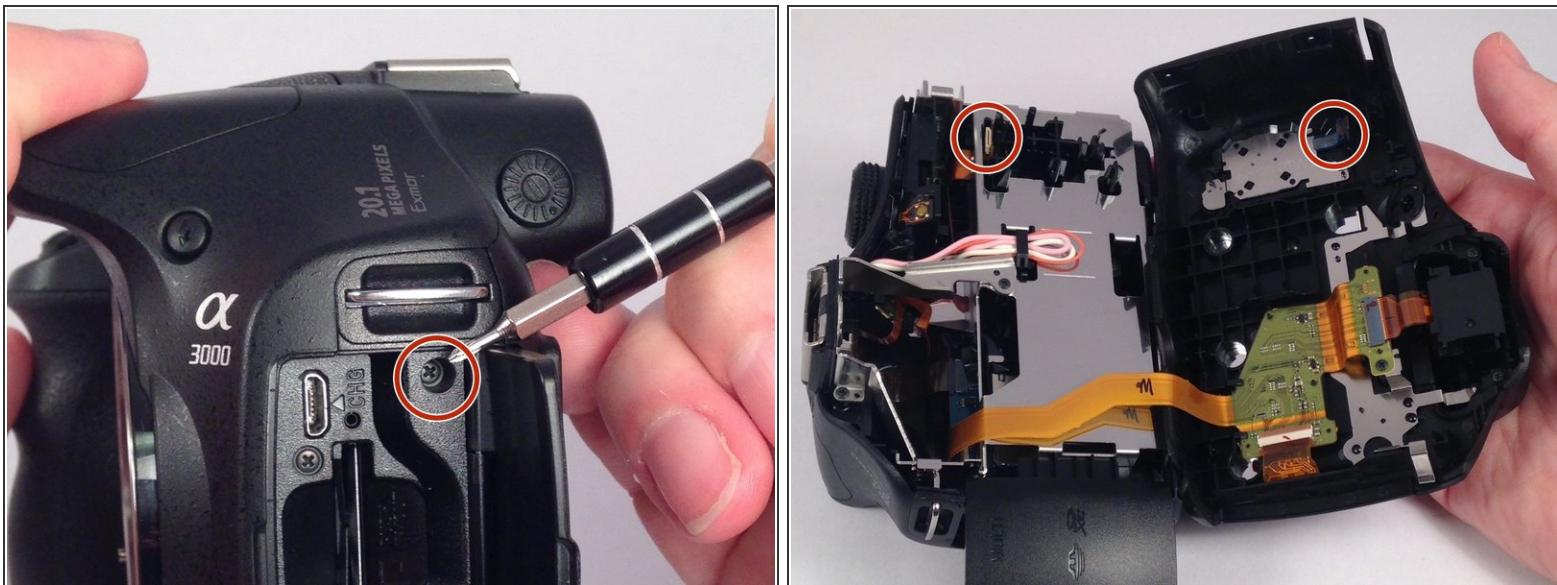

- Remove this final screw from the memory card compartment.
- Remove the chassis by pulling the back cover away from the camera.

 Be careful not to damage any of the delicate ribbon cables when removing the chassis.

Step 3

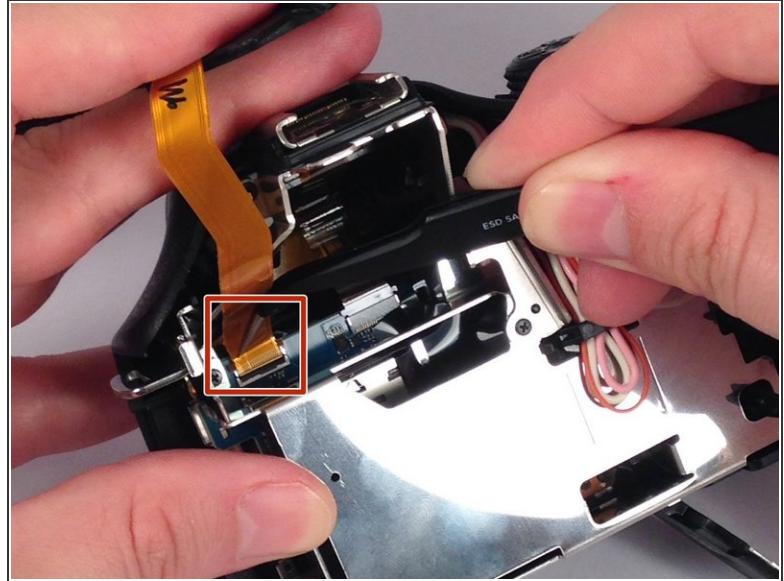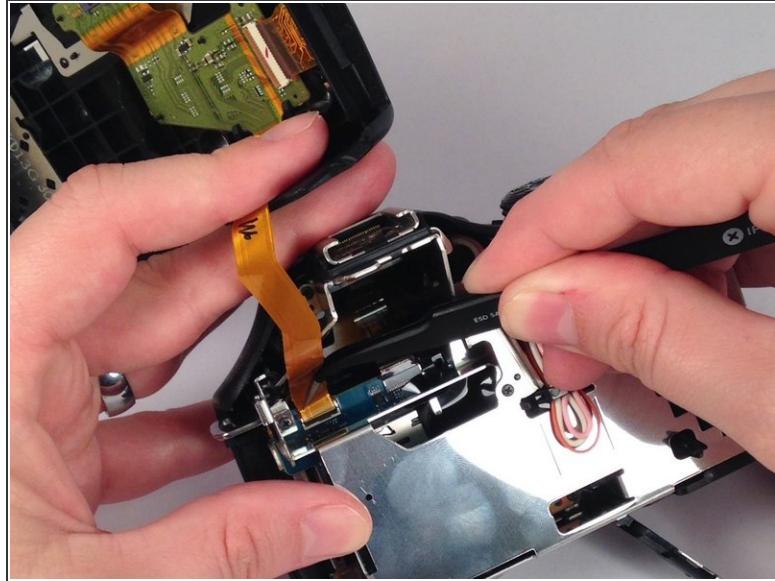

- Gently but forcefully lift up on the parallel cable connecting the two halves of the camera.