



Remington MB4040 Cover Assembly Replacement

Removing the cover portion of the device to get to the internal components.

Written By: Cameron Carnahan



INTRODUCTION

Prerequisite Only

TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)

Step 1 — Remove Blade Assembly



- Press the black button below the blade to remove the blade.

Step 2 — Remove Back Cover Hardware



- Place the device so the back of the product is facing up.
- Remove the two 11.0 mm PH00 screws from the black plastic housing at the bottom of the device.

Step 3 — Remove Front Cover Hardware




- Remove the chrome plated plastic piece by using the plastic opening tool to pry it from the housing assembly.
- Remove the small clear plastic piece that covers the zoom wheel numbers.

Step 4 — Front Cover (cont.)



- Remove the two 16.0 mm PH00 screws from the front cover.
- Use the blue plastic opening tool to pry apart the two halves of the device.

Step 5 — Blade Button Removal

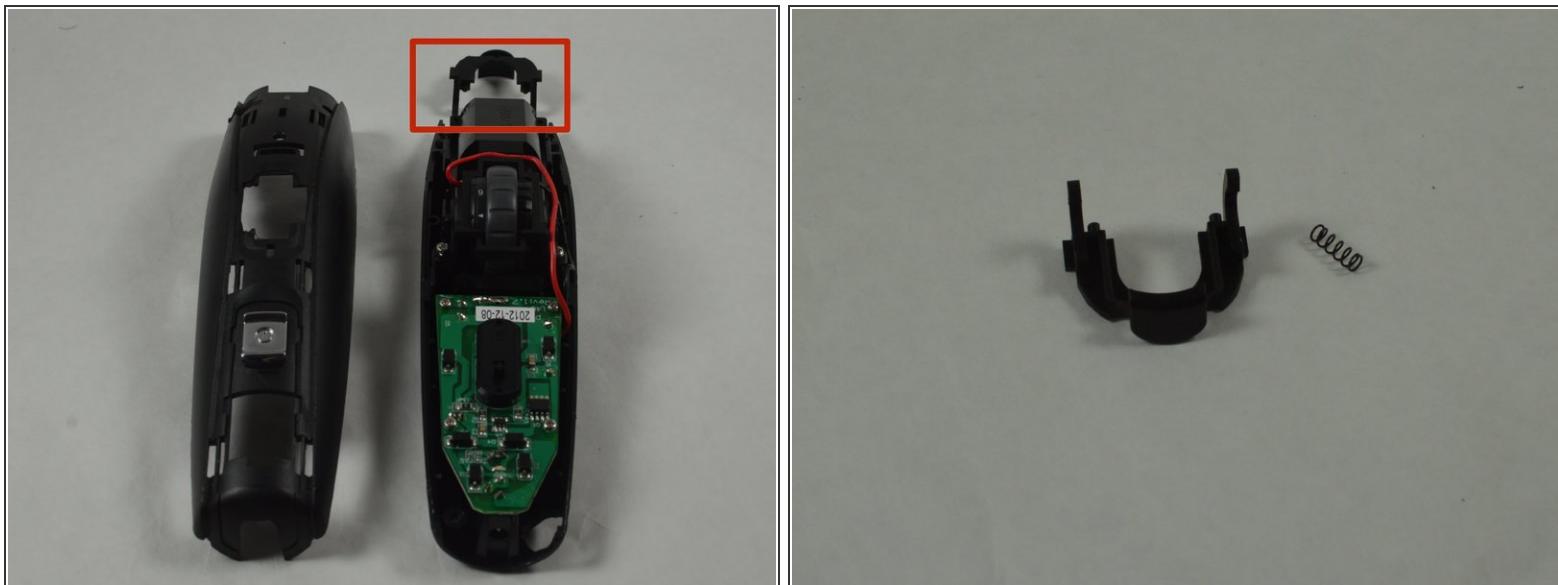

- Remove the black blade button and the two 10.0 mm springs, which are sandwiched between the cover assembly halves.
- The blade button is sandwiched between the halves and the two springs may fall out when the halves are separated.

To reassemble your device, follow these instructions in reverse order.