



# Removing Audio Technica ATH-AD500 Foam Disks

If your headphones are producing too much bass, remove the foam disks.

Written By: Melanie Reis



## INTRODUCTION

This installation guide will help you with the following:

- removing foam disk
- decreasing the bass

## TOOLS:

- Phillips #1 Screwdriver (1)

## Step 1 — Speaker Assembly



- Remove the ear pads by peeling them away from the grill.

## Step 2



- Remove all four 1cm screws on the inside of the headphone using a #1 Phillips head.


## Step 3



- Remove the speaker from the grill by pulling it out.

 Remove the speaker carefully so you do not rip the wires out.

## Step 4 — Foam Disks

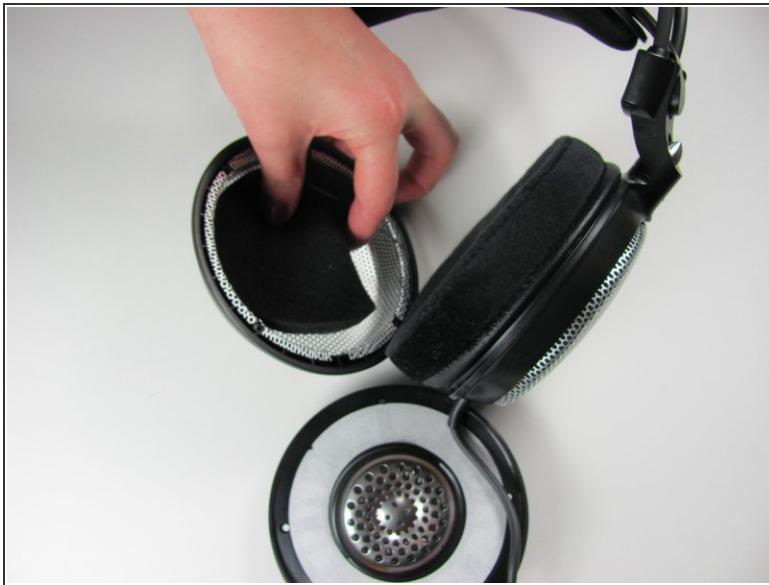

- Remove the foam disk from the grill by peeling it away from the grill.

 During reassembly, make sure that the speaker is angled into your ear canal.

To reassemble your device, follow these instructions in reverse order.