




# Removing the Back Panel of the Phone

This guide will instruct you on how to remove the back panel of the phone to gain access to the rest of the phone for necessary repairs.

Written By: Elizabeth Kelly

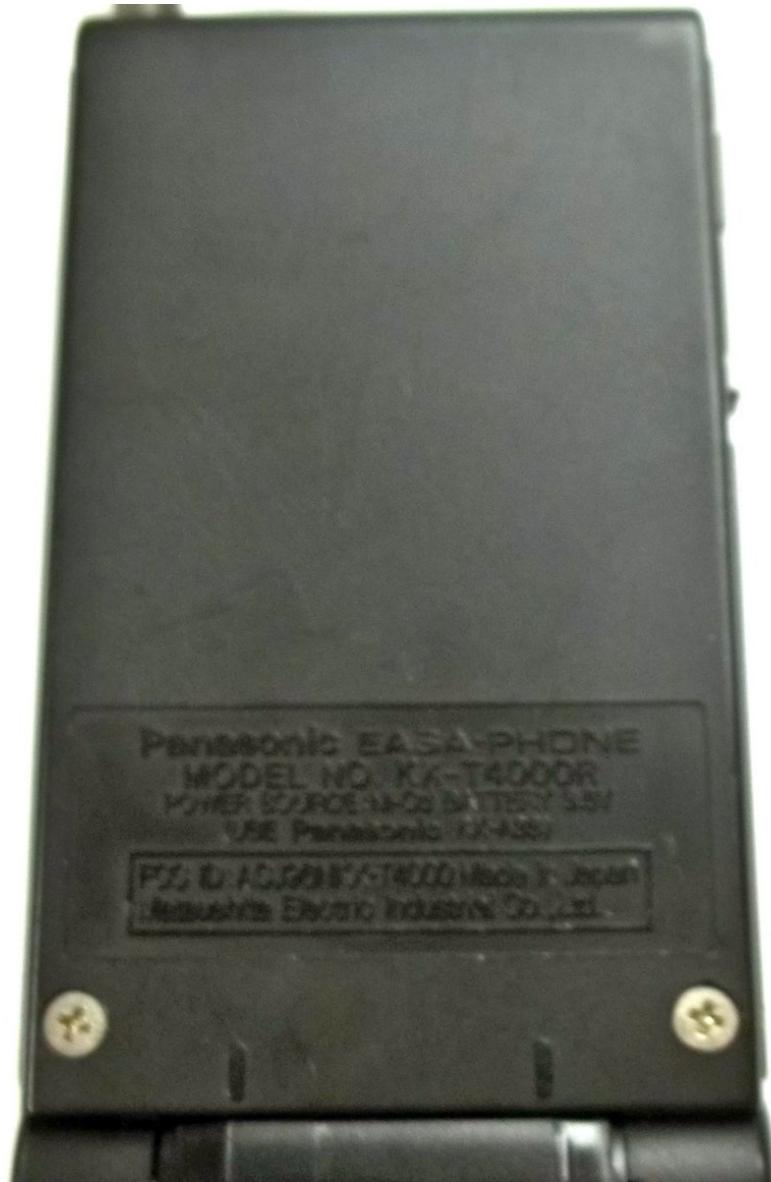

## INTRODUCTION

This guide will focus on removing the back cover of the upper part of the phone. This will allow the user to access many of the other parts of the phone, including the motherboard, the keypad, the antenna, and the speaker.

### TOOLS:


- Phillips #2 Screwdriver (1)

## Step 1 — Removing the Back Panel



- Orient the phone so that the phone model and other descriptive information is facing upward.
- Locate the two silver screws near the hinge where the battery is housed.
- Remove the silver screws using a Phillips head #2 screwdriver.

## Step 2

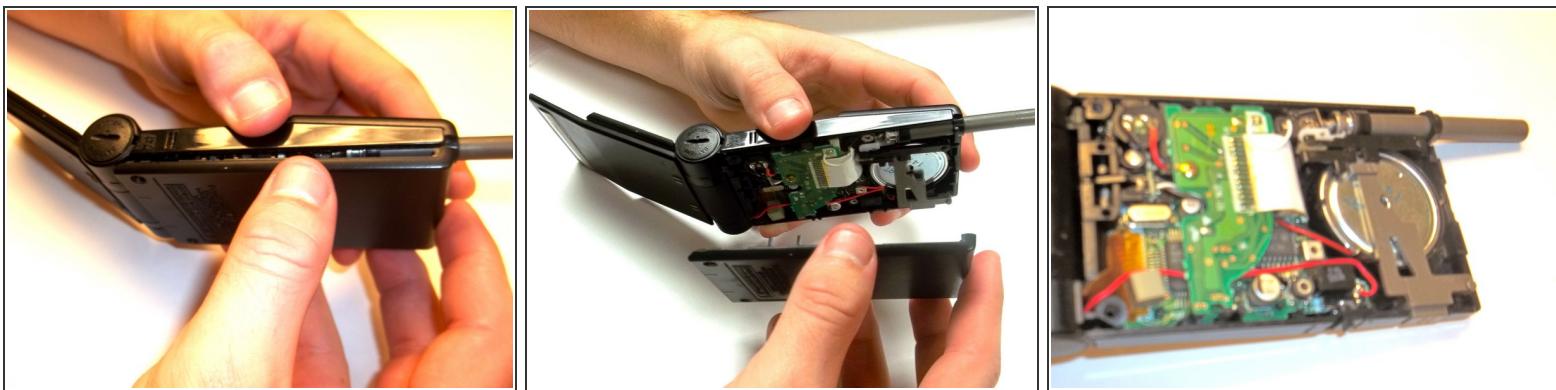

 Pull off the back panel of the phone.

- Make sure you pull the cover off carefully in order to prevent damage to the back cover.

To reassemble your device, follow these instructions in reverse order.

This document was generated on 2019-09-23 09:53:51 AM (MST).

