



Replace Phone Face

This guide will show you how to separate the front and back of the phone, and replace the front face.

Written By: You Zhou



 **TOOLS:**

- [Phillips #00 Screwdriver](#) (1)
- [iFixit Opening Picks set of 6](#) (1)

Step 1 — Battery



- Slide the back cover down towards the bottom of the phone to remove.

Step 2




- Pull the top of the battery towards you to remove it from the phone.

Step 3 — Replace Phone Face




- Unscrew the two screws located at the bottom of the phone.
- *(i)* Use a PH00 Phillips head to remove the 9 mm screws.

Step 4

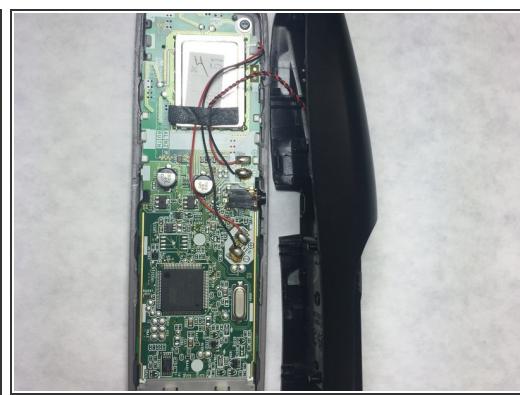

- Separate the back cover from the front cover by using a wedge.
- Remove the back cover from the front cover by pulling them apart.

Step 5

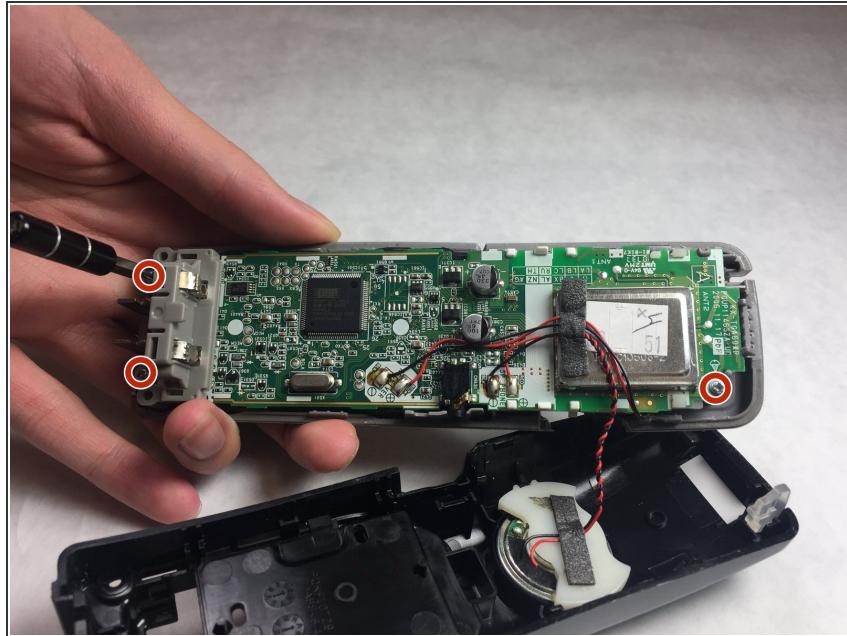

- Remove three screws on the motherboard.
- Pull the phone face off of the motherboard.

To reassemble your device, follow these instructions in reverse order.