




# Rival Mini Chopper MC-67BL Safety Latch Replacement

Remove the safety latch from the Rival Mini Chopper.

Written By: Roxanne

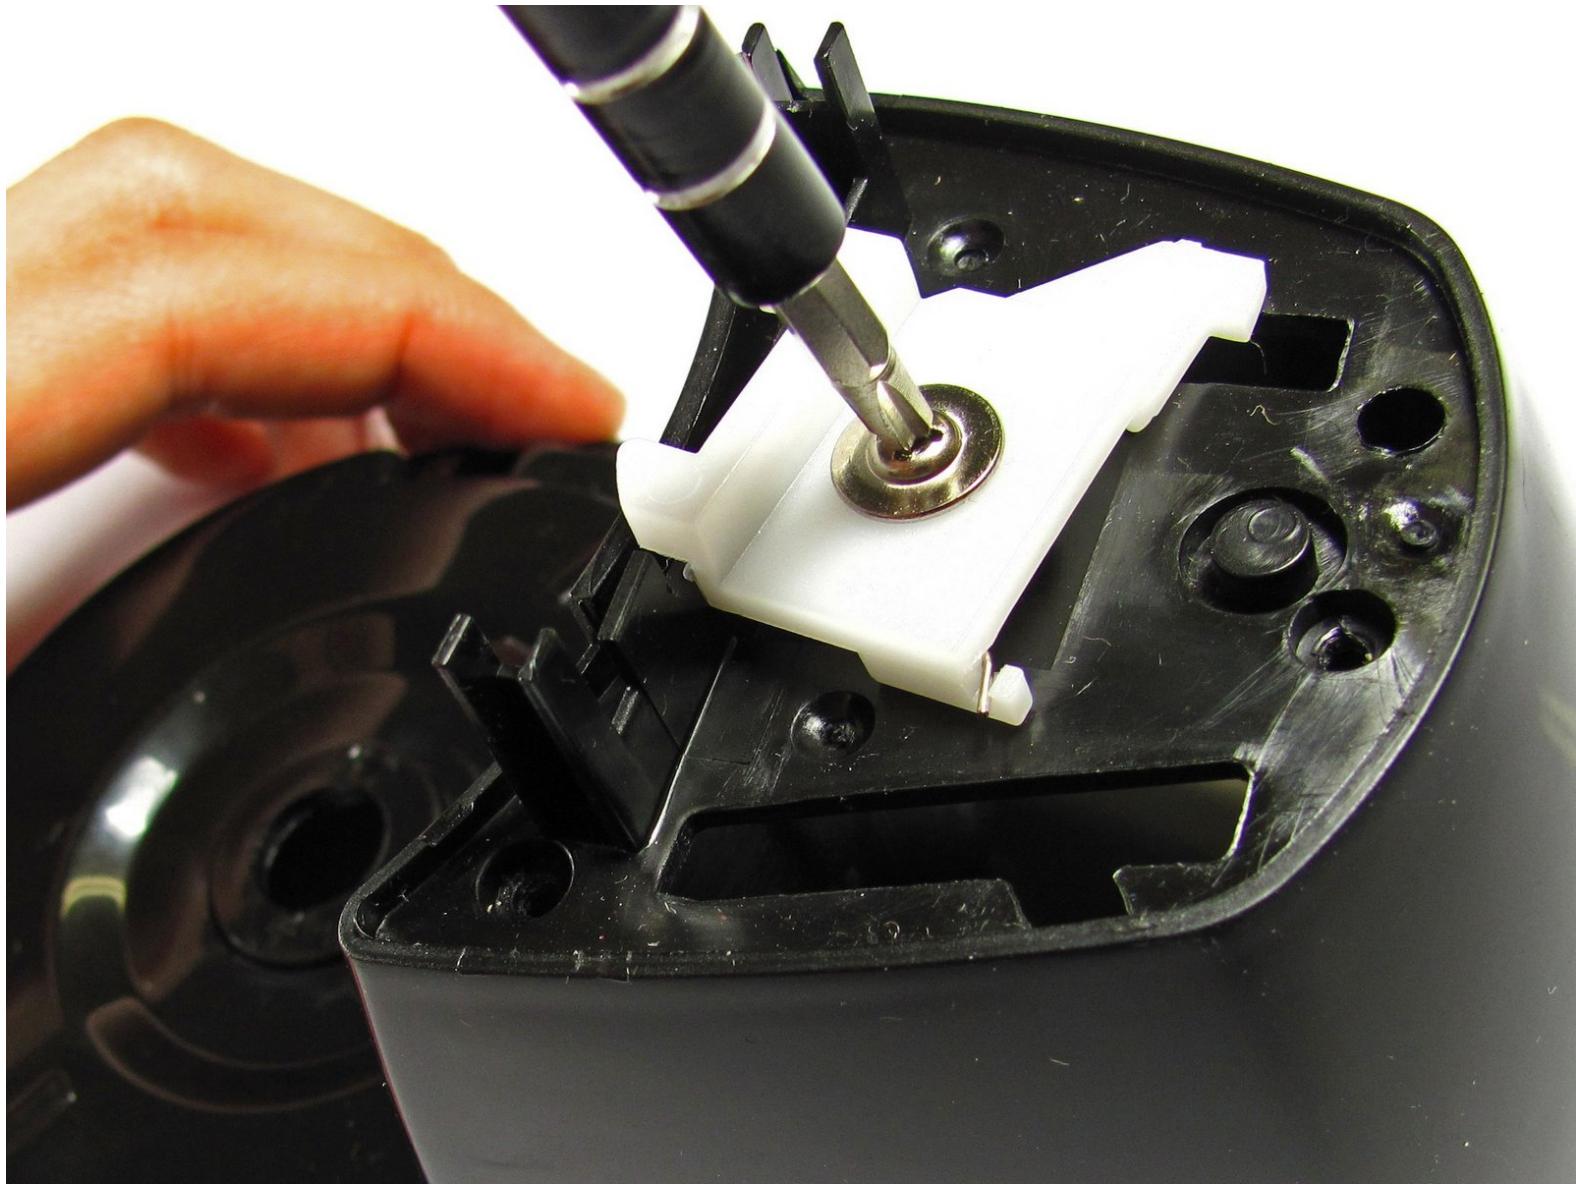

## INTRODUCTION

This guide will help you remove the safety latch for the container lid.

### TOOLS:

- [Phillips #2 Screwdriver](#) (1)
- [Large Needle Nose Pliers](#) (1)
- [iFixit Opening Tools](#) (1)

## Step 1 — Turning Gears



- Twist the plastic lid counterclockwise to unlock it.
- Lift the lid to remove it from the container.

## Step 2



- Carefully remove the blade from the container.
-  For reassembly, the teeth on the metal shaft line up with slots on the inside of the plastic hole.

## Step 3




- With your hand, twist the container counter-clockwise until it unlocks from the base. Remove the container by lifting it straight up.

## Step 4



- Use your fingers to pry out the two rubber feet from the bottom cover of the base.  
*(i)* The two feet furthest from the button tower contain screws. The other two feet do not.

## Step 5

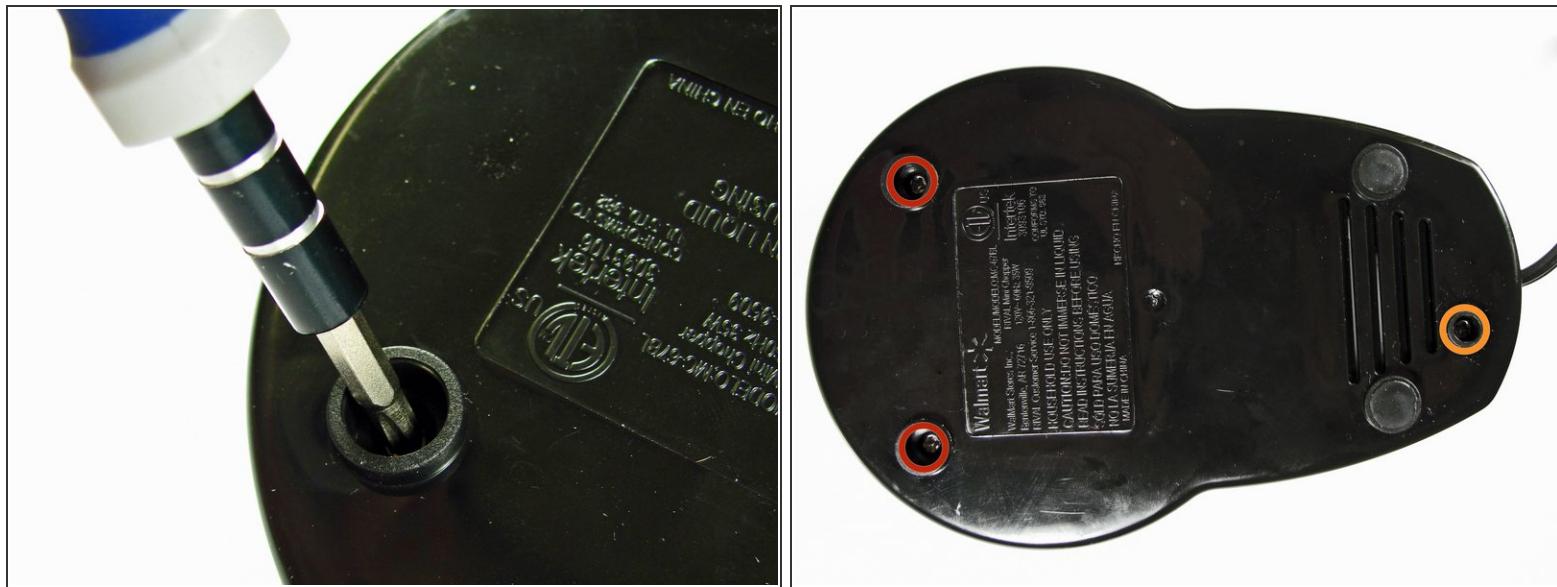

- Use the Phillips #2 screwdriver to unscrew the two 12.7-mm screws underneath the rubber feet.
- Use the same screwdriver to unscrew the 15.88-mm screw from the back of the chopper.

## Step 6



- Firmly lift the bottom cover off of the base.

## Step 7



- Remove the smaller white gear by lifting it up with your hand.

## Step 8



- Use a pair of pliers or any other clamping tool to securely hold the blade-shaft that sits above the base.

**⚠** Grab the gear with your other hand and turn **CLOCKWISE**. Unlike most screws, the gear is reverse-threaded to allow the blade to spin.


- Continue turning the gear until completely removed from the blade-shaft.

## Step 9 — Power Button




- Use your hand to firmly pull the blade-shaft from the base.

## Step 10

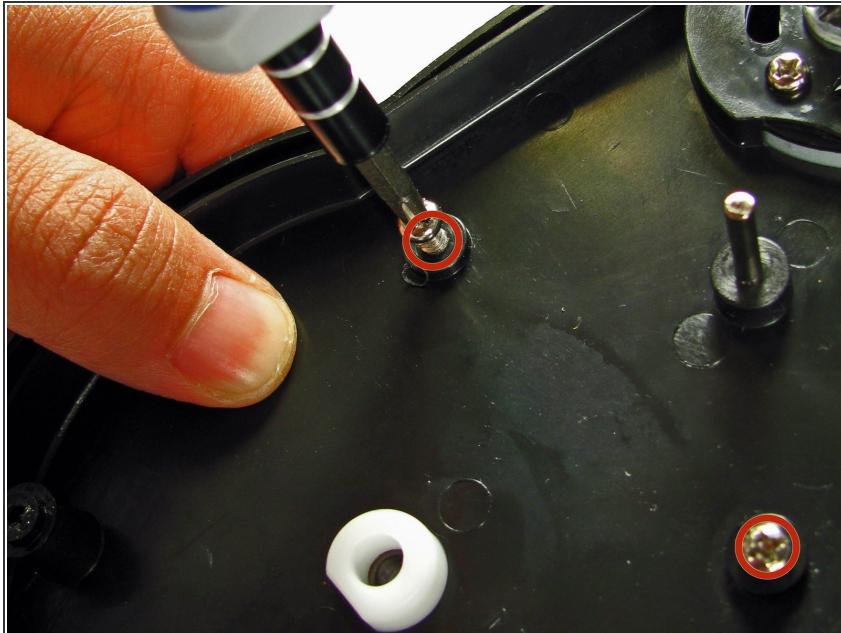


- Using Phillips #2 screwdriver, unscrew two 12.7-mm screws in the middle of the base.

## Step 11

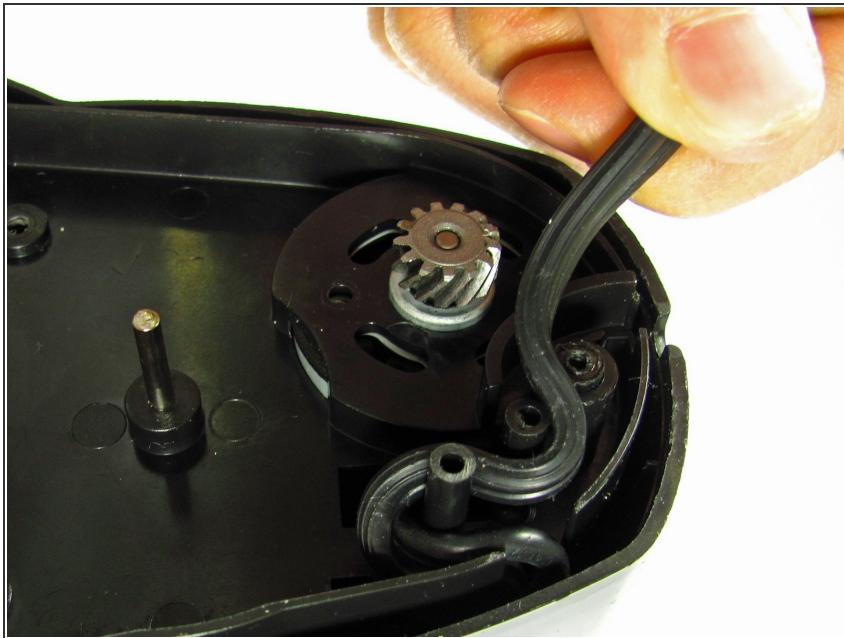

- Unwind power cord from the base pegs.


## Step 12

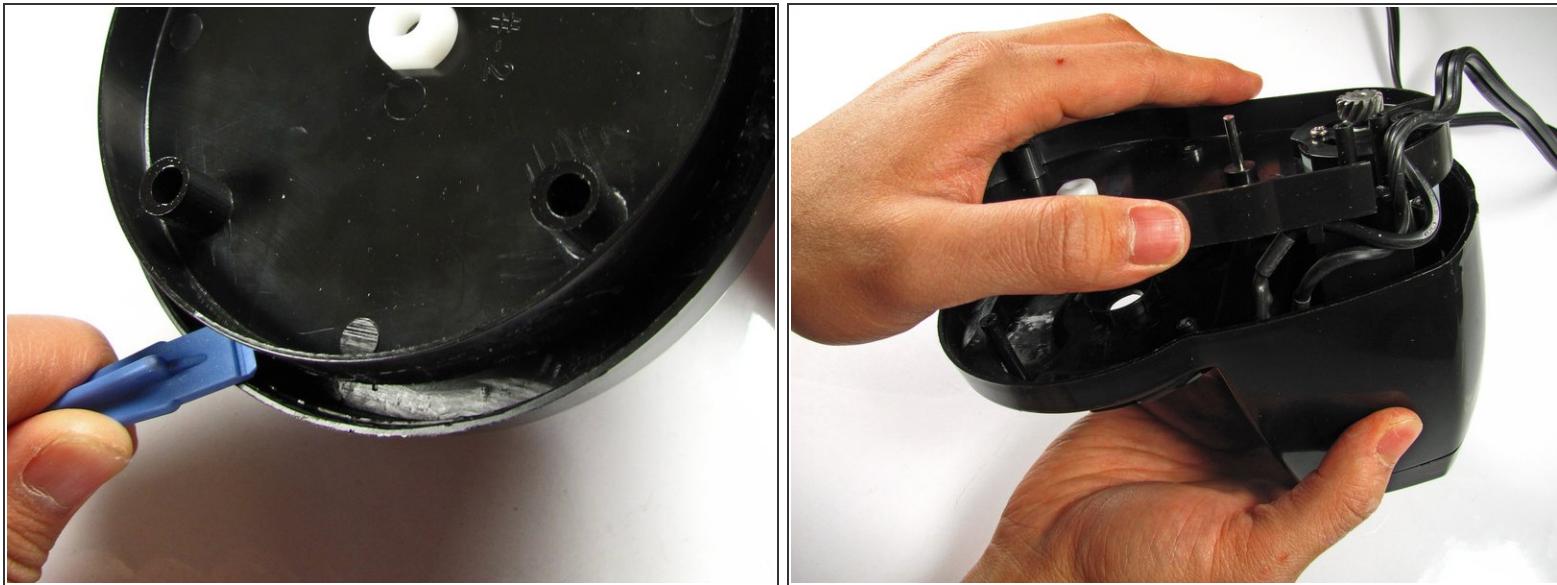

- Use the plastic opening tool to pry open the base from the main body.
- (i)* These two plastic prongs are pressed fit into the base. It may take some effort to pry the base completely off.
- Once freed, lift the base panel from the main body and set it aside.

This document was generated on 2019-09-23 11:12:41 AM (MST).

## Step 13

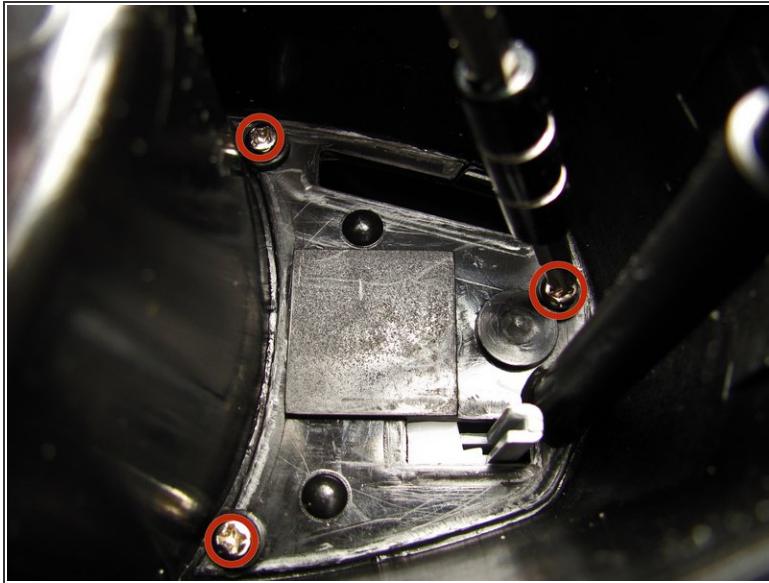

- Use a Phillips #2 screwdriver to remove the three 9.53-mm screws from inside the main body.
- Next, turn the device upright and lift the upper casing from around the button gently.


## Step 14



- Remove the button by simply pulling it up.


**⚠** Don't lose the spring under the button! Without it, the blender will not function.

## Step 15 — Safety Latch

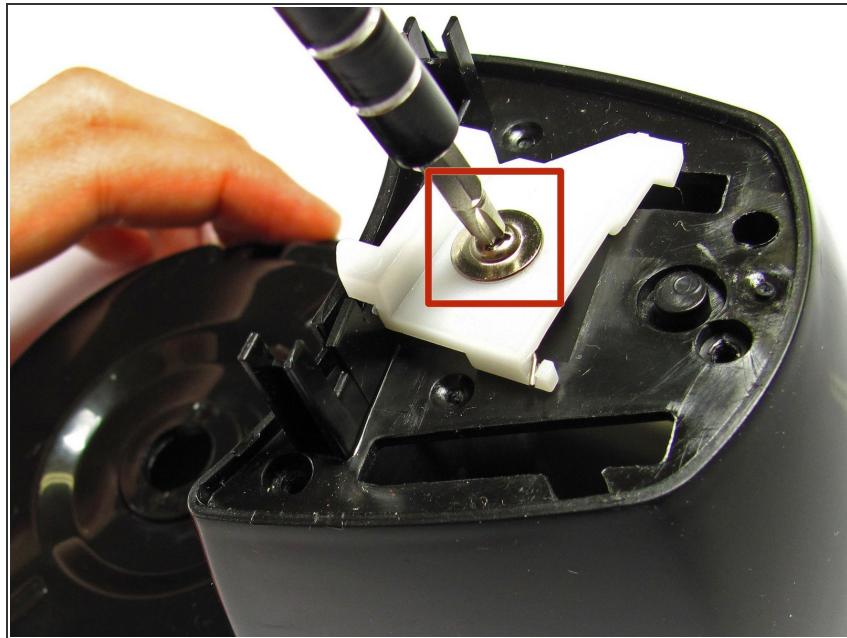

- Use the Phillips #2 screwdriver to remove one 9.53-mm screw.

## Step 16

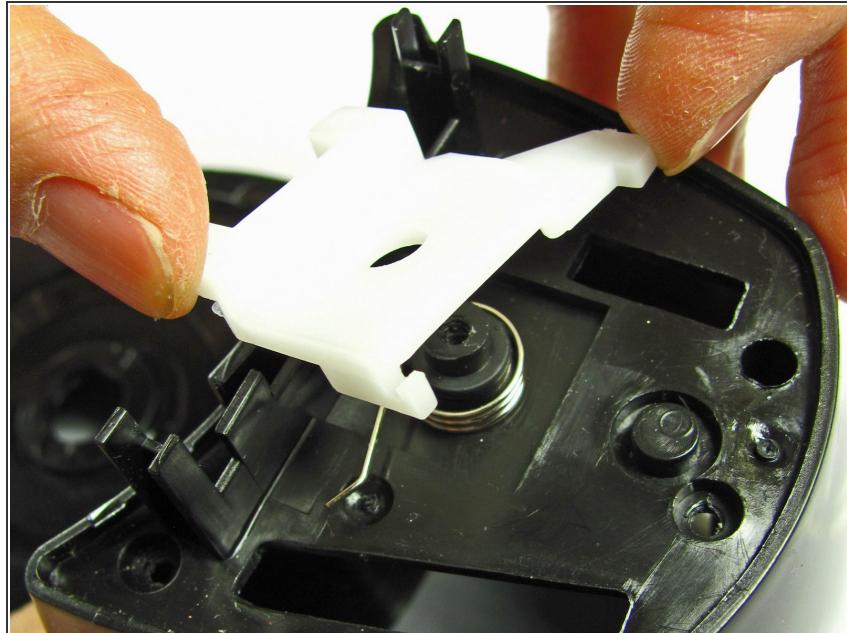

- Remove the white latch by unhooking it from the spring wire and gently lifting straight up.

To reassemble your device, follow these instructions in reverse order.