



RotoZip Rebel REB01 Type 2 Saw Casing Removal.

Prerequisite Only

Written By: Syed Mujtaba Hasan



TOOLS:

- [Metal Spudger \(1\)](#)
- [64 Bit Driver Kit \(1\)](#)

Step 1 — Saw Casing



 Unplug the saw before attempting any of the replacement guides.

- Orient the saw so that the handle is closest to you and the saw end points towards the left.

Step 2



- Push down on the grey lock on the right side of the handle to unlock it.
- Pull the handle to detach it from the saw.

Step 3




- Lift the black lock at the tip of the saw to unlock the depth gauge.
- Pull the depth gauge to detach it from the saw.

Step 4



- Rotate the device so that the bottom of the saw is facing upwards.
- Remove the six 20mm screws with a 6mm flathead screwdriver.

Step 5

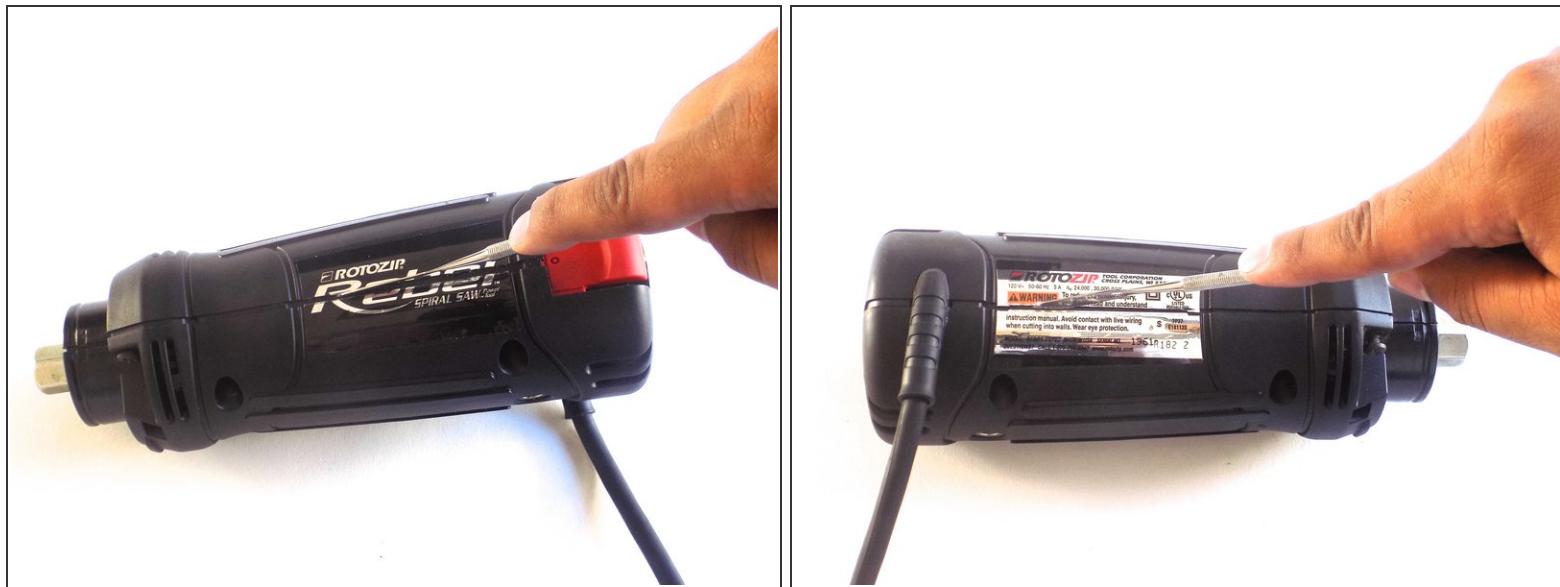

- Cut through the stickers on the right and left sides of the saw using a metal spudger.
- Pull off the top half of the casing.

To reassemble your device, follow these instructions in reverse order.