



Ryobi P235 Magnetic Tray Replacement

This guide will detail the replacement of the magnetic tray of a Ryobi P235.

Written By: Paul Sousa



INTRODUCTION

Use this guide to replace the magnetic tray in your Ryobi P235 impact driver if it is broken or missing.

TOOLS:

- [Phillips #2 Screwdriver](#) (1)
- [T20 Torx Screwdriver](#) (1)

Step 1 — Battery



- Push in both push tabs on the battery at the same time.
- They are located below the green housing and are in the middle on both sides of the battery.

Step 2



- Pull the battery away from the drill housing while holding in both tabs.

Step 3 — Magnetic Tray



- Use a Phillips #2 screwdriver to remove the eight 16 mm screws that secure the housing.

Step 4




- Use a T20 Torx screwdriver to remove the four 25.4 mm screws that secure the front of the housing.

Step 5



- Open the housing with the data label facing up.

Step 6

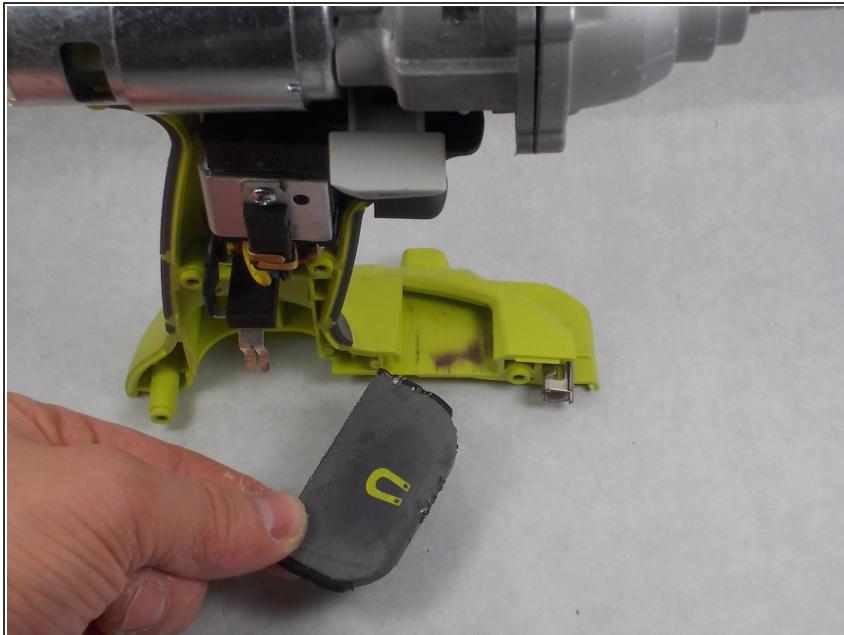

- Remove the magnetic tray from the device.

To reassemble your device, follow these instructions in reverse order.