



SVP 5800 Front Casing Replacement

This guide demonstrates how to remove and replace the front casing that surrounds the mechanical parts of the device.

Written By: Cheyenne Heinen



INTRODUCTION

This guide enumerates the steps of removing and replacing the front casing of the SPV Aqua 5800 Camera in order to protect the mechanisms within.

TOOLS:

- [Phillips #000 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)

Step 1 — Strap Hook




- Locate the two 3.5 mm screws on the side of the device.
- Apply pressure to the PH J000 philips head screwdriver and turn in a counter clockwise motion until the screw becomes loose enough to pull out.

Step 2 — Front Casing



- Once you have properly removed the strap hook, locate the two 3 mm screws located on the opposite side of the strap hook.
- Refer to the prerequisite guide on removing the strap hook for instructions.
- Place the PH J000 philips head screwdriver on the head of screw; apply pressure and turn in a counter clockwise motion until screws come loose.

Step 3

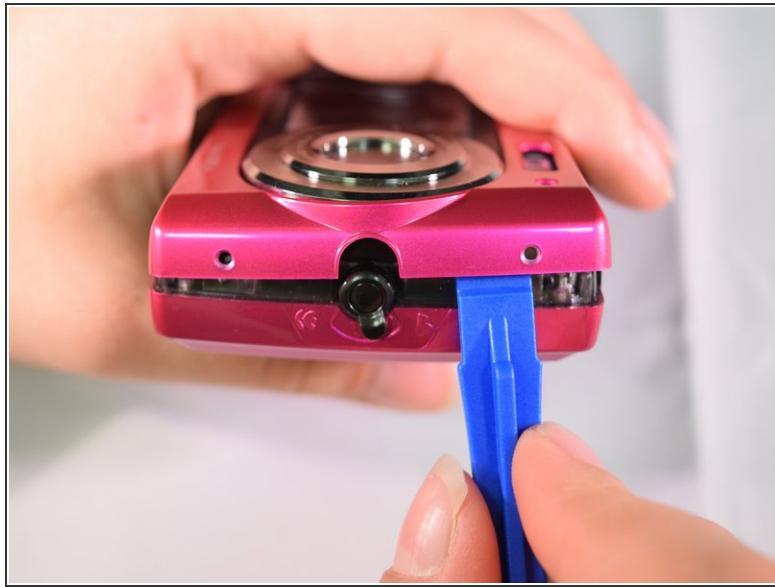

- Place the plastic opening tool on the crack between the front and back casings.
- Apply pressure by pulling down on the plastic opening tool to pry the case apart.

Step 4



- Wedge your fingers in the opening and slowly pull the front casing away from the bottom casing until it completely separates from the device.

⚠️ Using too much force in this step can damage your device.

This document was generated on 2019-09-18 11:50:18 PM (MST).

To reassemble your device, follow these instructions in reverse order.