



# Samsung Alias 2 Camera Replacement

This is a guide to replacing the camera of a Samsung Alias 2 cellular phone.

Written By: Chris



## INTRODUCTION

This guide shows you how to remove a broken camera and install a new camera.

### TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)
- [Tweezers](#) (1)

## Step 1 — Battery



- push down the back cover of the phone, then take it out.

## Step 2



- Remove the battery.

## Step 3 — Camera




- Remove the (2) 4.1 mm screws on screen.

## Step 4




- Remove front outside casing with plastic opening tools.

## Step 5

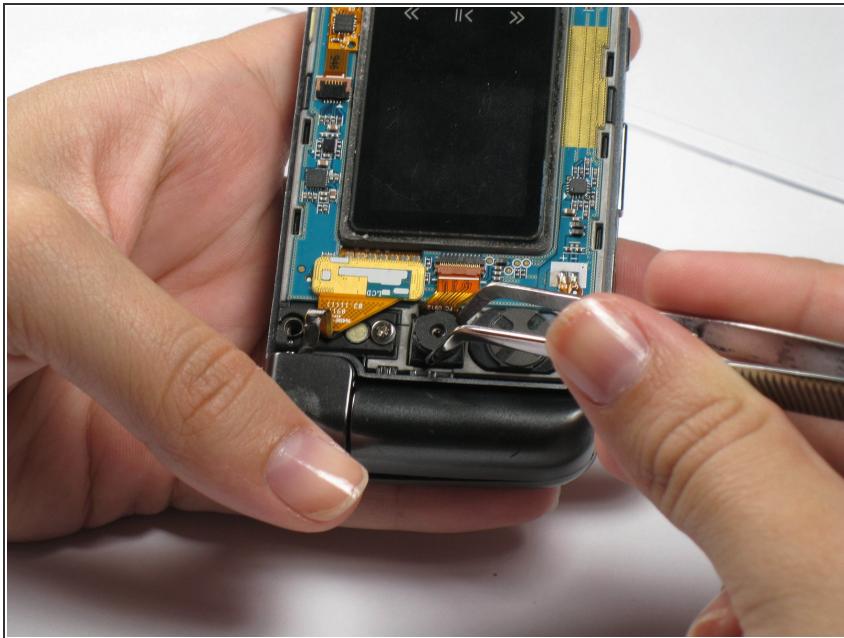


- Use tweezers to remove the camera from its holding slot.

## Step 6

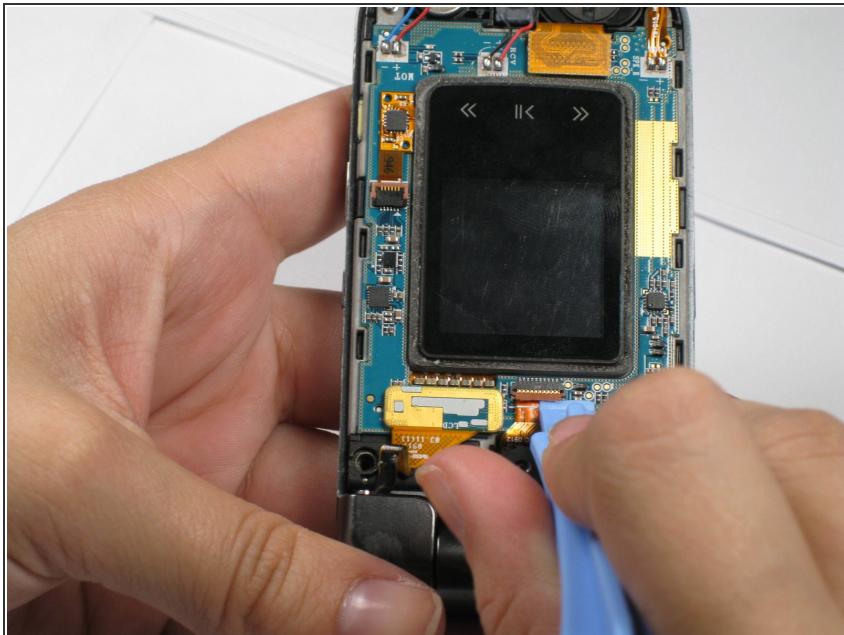


- Use a plastic opening tool to lift the tab that holds the camera ribbon in place.

## Step 7

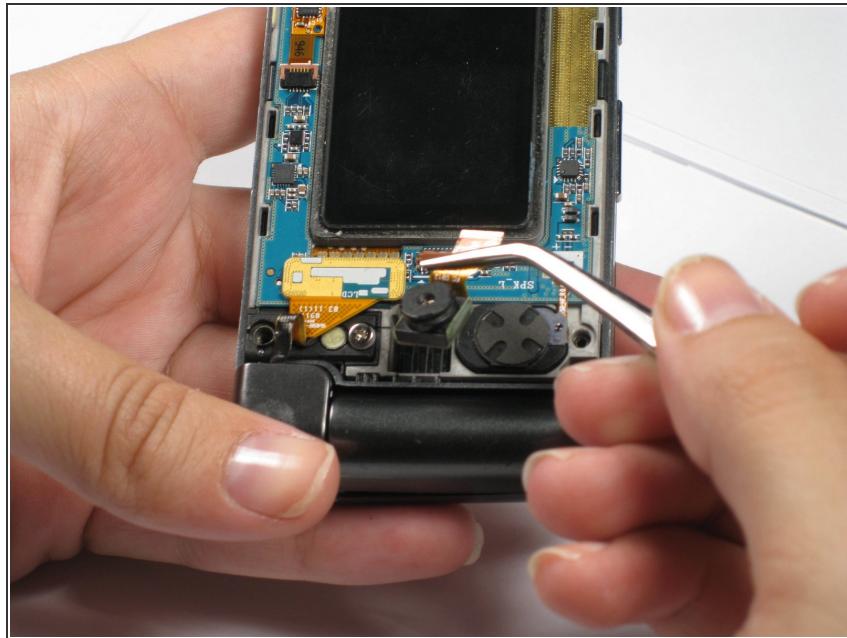


- Use tweezers to remove the camera.

## Step 8

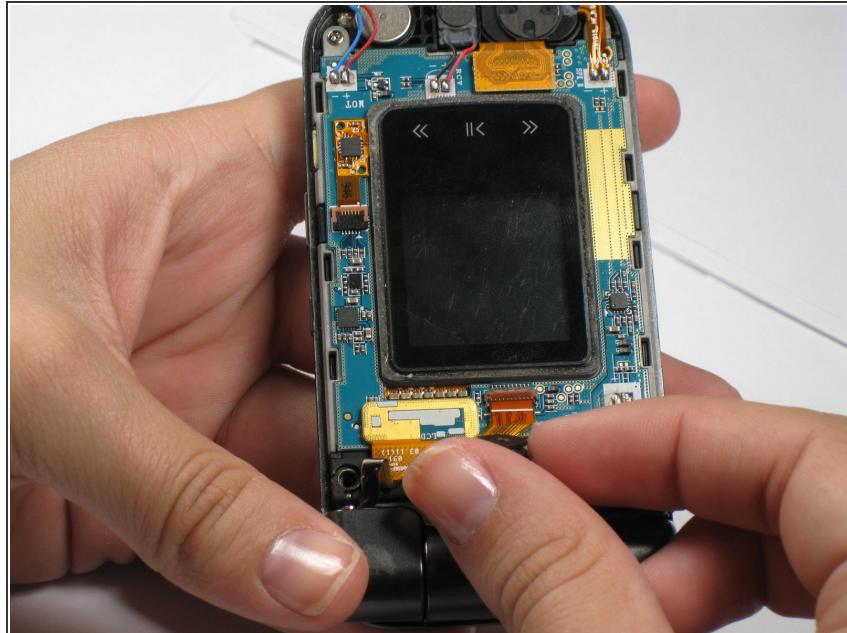

- Slide ribbon of new camera under the same tab.

## Step 9

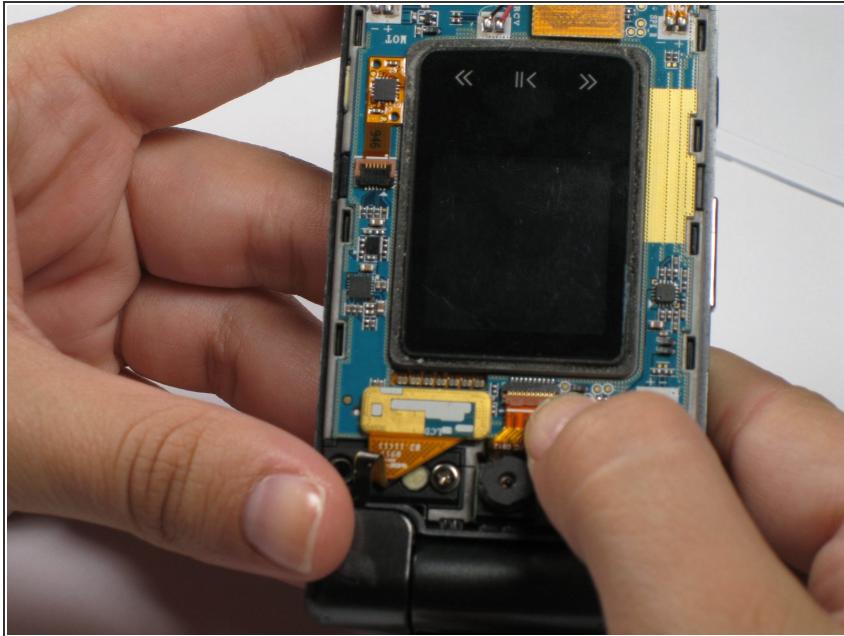

- Close the tab down onto the new camera ribbon.

## Step 10



- Use tweezers to put the new camera into the camera slot that previously held the old camera.

 **WARNING:** Do not touch the camera lens as it will easily scratch or smudge.

To reassemble your device, follow these instructions in reverse order.