


Written By: Cameron Herring




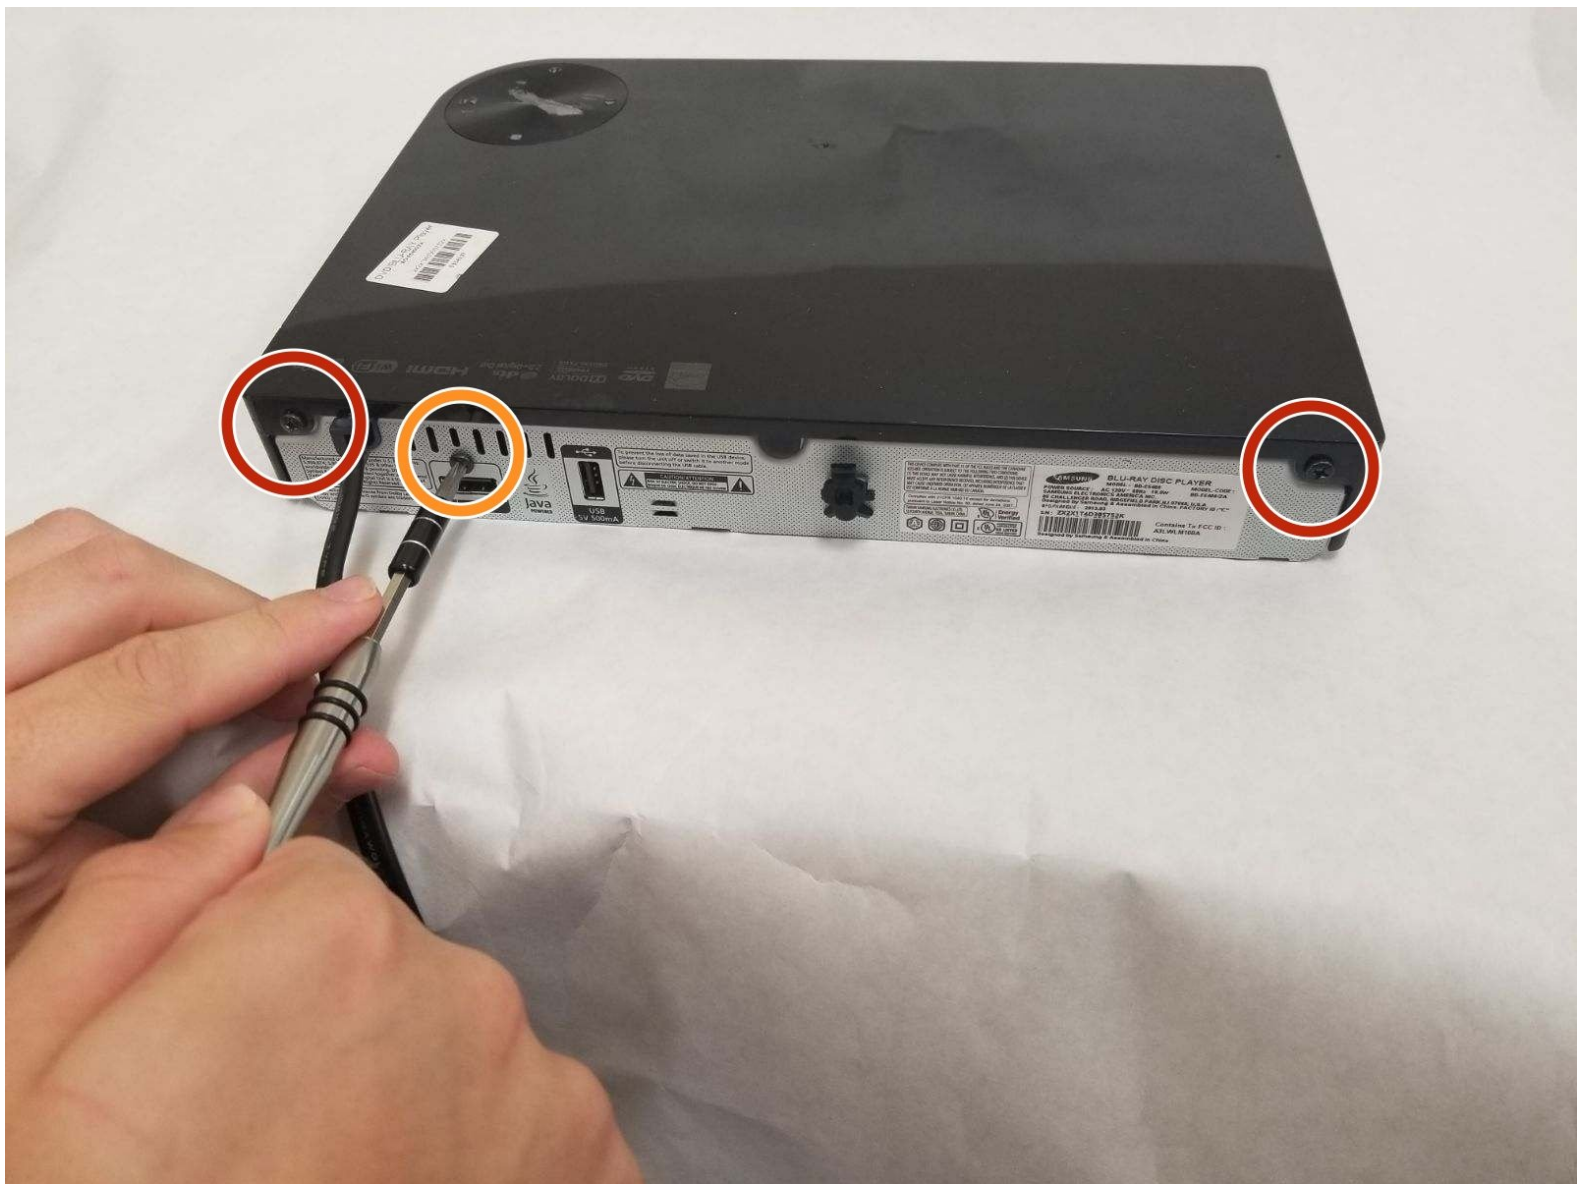

TOOLS:


- [Phillips #1 Screwdriver](#) (1)
-

Step 1 — Outer Cover

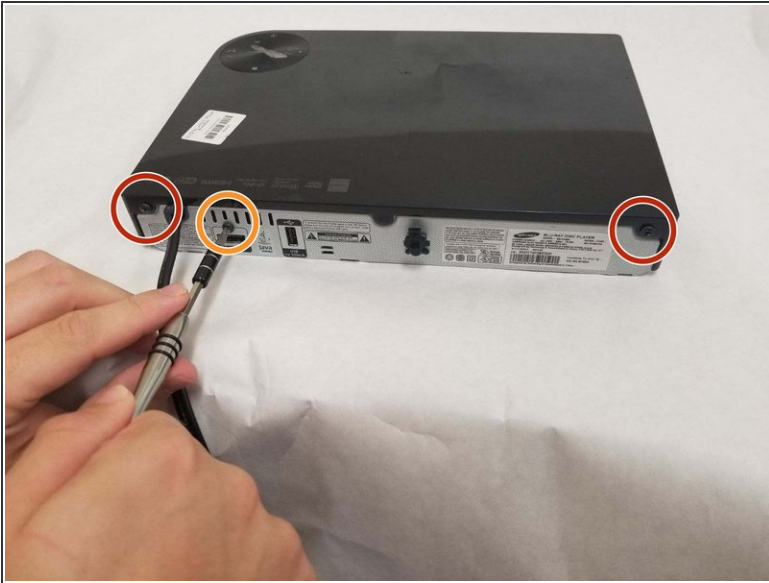

- Remove the two 10mm Phillips #1 screws.
- Remove the one 8 mm Phillips #1 screw.
- Carefully lift up the cover and lay back, to ensure that you do not damage the attached cable.

Step 2

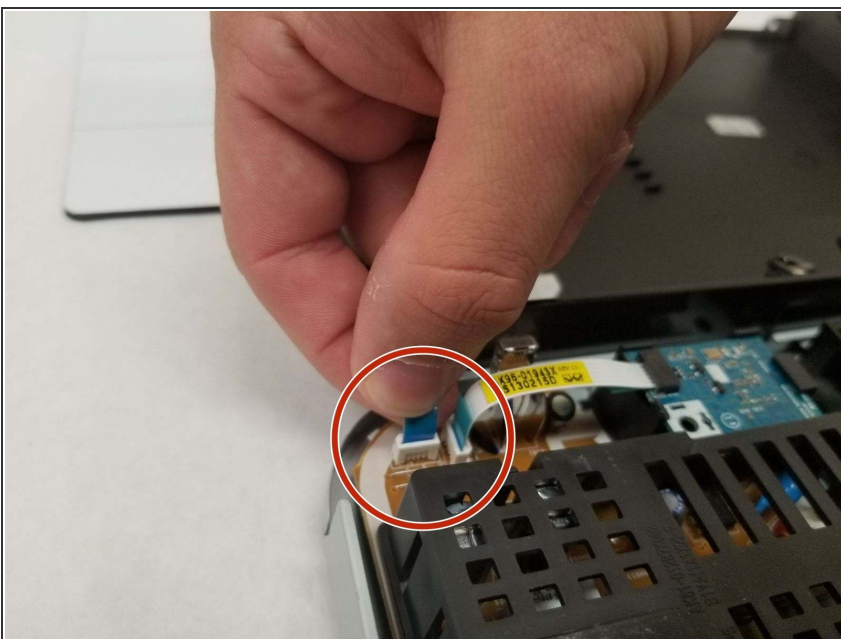

- Unplug the small wiring bundle attaching the body of the device to the cover.
- Lay the cover aside.

