




# Samsung Captivate 3.5mm Headphone Jack Replacement

Replace the Captivate's 3.5mm headphone jack.

Written By: Christopher

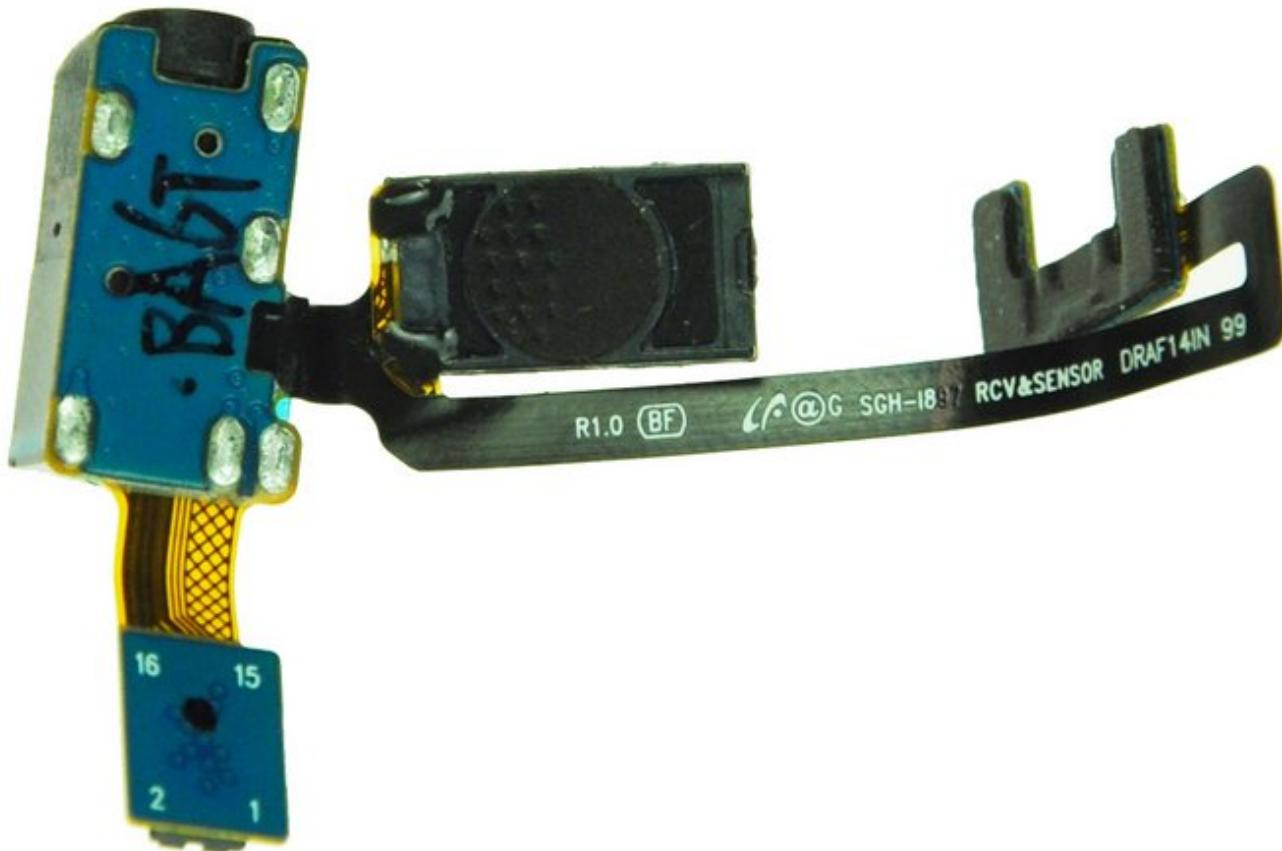


## INTRODUCTION

Use this guide to replace your captivates 3.5mm headphone jack.

### TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [Phillips #000 Screwdriver](#) (1)
- [Spudger](#) (1)

## Step 1 — Battery

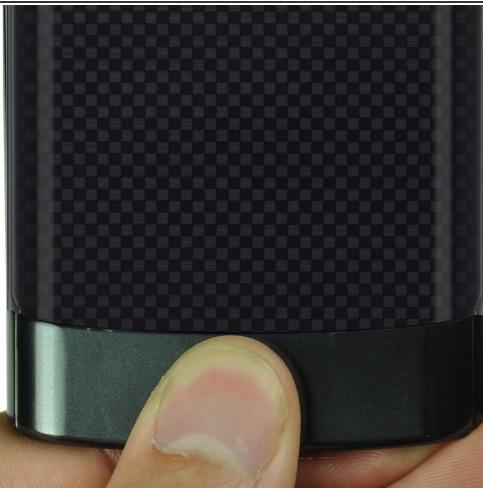

- Remove the back cover by pressing on the bottom section of the phone and sliding the bottom piece downward.
- Lift up the back cover.

## Step 2



- Place your finger on the bottom of the battery and lift to remove.

## Step 3



- Replace the old battery with the new one.

## Step 4 — Rear Case



- Insert the spudger underneath the bottom section of the phone.
- Gently lift and push the spudger to slide the bottom section down to reveal two hidden screws.

## Step 5



- Remove the six 4.5mm #000 Phillips screws.


## Step 6



- Starting at a bottom corner, use the spudger to separate the rear case from the front display.
- Move the spudger towards the top on both sides. The plastic opening tool is easier to use for this step.


**⚠** Be careful when detaching the top. Free each side, stopping short of the center of the cover. Apply backward pressure on both corners with a finger applying pressure on the center, and slide the whole back cover toward the bottom of the device. Note: forcing the cover can result in cracked plastic.

## Step 7

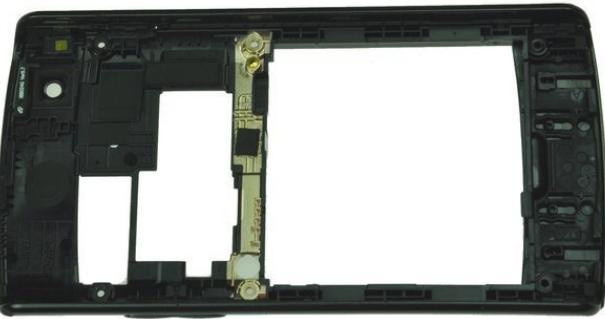

- Separate the rear case from the phone.

## Step 8 — Antenna Cable

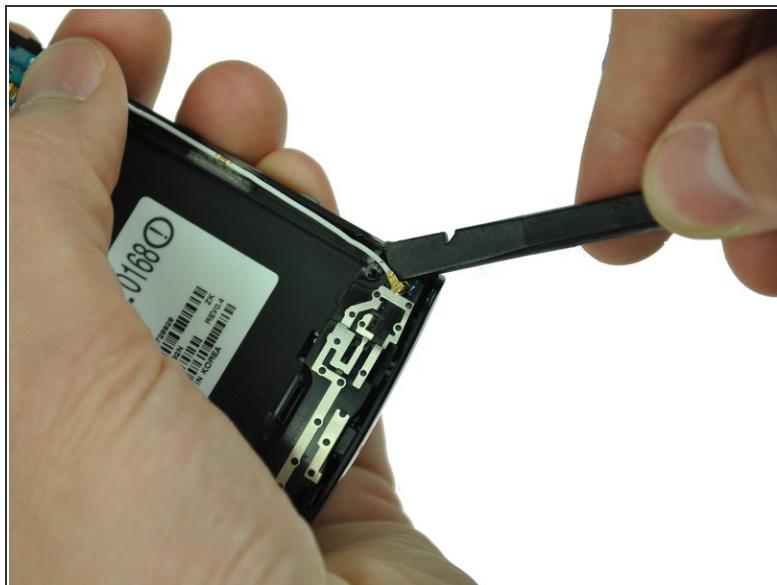

- Use a spudger tool to pry up the antenna cable from the connector on the motherboard.
- Pry up the other end of the cable from the connector on the antenna array.

## Step 9 — Motherboard



- Use a spudger to disconnect the three highlighted connectors.
- Pry straight up and be careful to pry against the connector, not the socket on the motherboard itself.

## Step 10



- Use your fingers to lift up the logic board from the assembly.

## Step 11 — 3.5mm Headphone Jack



- Gently pull up on the audio jack, taking the attached ribbon cable with it.

⚠ There is a small amount of glue holding the ribbon cable that attaches the audio jack to the earpiece.

To reassemble your device, follow these instructions in reverse order.