



# Samsung Droid Charge Screen Replacement

Replace the screen on your Samsung Droid Charge.

Written By: Luke Gordon



## INTRODUCTION

This guide will show you how to remove the current screen on your Samsung Droid Charge and install a new one.

### **TOOLS:**

- [Phillips #00 Screwdriver](#) (1)
- [Plastic Cards](#) (1)

## Step 1 — Rear Cover




- Open up the back case on the phone from the groove in the bottom of the phone.
- *(i)* You can do this by inserting a fingernail or similarly thin object into the groove and pulling up with mild force.

## Step 2 — Battery



- Below the left part of the bottom of the battery area there will be a groove large enough to fit in a finger or screw driver head.
- Use the groove to lever out the battery gently, in order to not damage either the battery or phone. Store the battery in a safe place.

## Step 3 — microSD

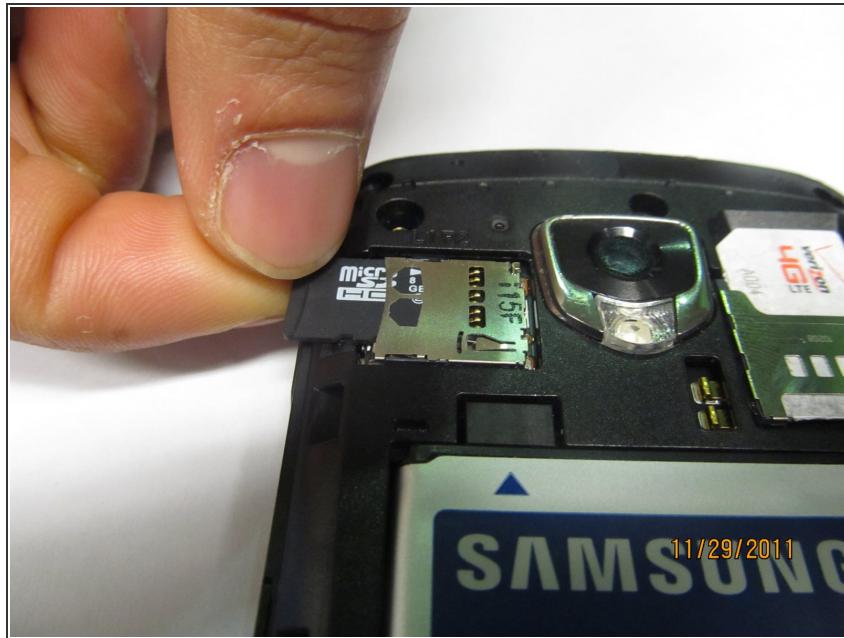

- Push the SD card further into its metal slot until you hear a click.
- Release the card, and it should automatically eject itself.
- Remove the SD card.

## Step 4 — SIM card



- Slide the SIM card out of its casing by pushing on it and sliding it upward.

## Step 5 — Screen



- Locate the 7 small black screws located around the edge of the phone under the battery cover.
- With a small Philips head screwdriver, remove each of the screws and place them in a secure location.

## Step 6



- Locate your pry tool.
- Insert the pry tool into the plastic edge that runs along the sides of the phone. Doing so will allow you to remove part of the back casing.
- Use a prying motion to lift the casing up.
- Repeat this motion all around the screen edge until the casing pops off.

## Step 7



- Release the one pop connector for the motherboard located on the right.
- Release the volume button flex cable on the right.
- Release the power button flex cable on the right.
- Now the motherboard can be removed. Simply lift out the motherboard and set aside.

## Step 8



- Using a hairdryer or heat gun, warm the phone. Doing so will warm the adhesive holding the screen in place, allowing us to continue disassembling the device.
- Use the pry tool to pry the screen off the casing. You may need to use force to overcome the adhesive.

 Work carefully to prevent damage to the phone.

## Step 9



- You can now swap out the old screen for your new one.